Concrete Mounting Pads



Applicable Models

- 8RESV/RESVL
- 10RESV/RESVL
- 12RESV/RESVL
- 14RCA/RCAL


- 14RESA/RESAL
- 20RCA/RCAL
- 20RESA/RESAL
- 20RESC/RESCL

Description

Concrete mounting pads allow easy installation of the Kohler® residential generator models listed above. Mounting pads are available in 3 inch and 4 inch thicknesses. The 4-inch hurricane pad has a wind rating of 175 mph and is recommended for storm-prone areas.

- Fiber-reinforced concrete pad with rebar.
- Impact resistant.
- Flat bottom facilitates mounting and leveling of the generator and prevents the generator from sinking into the ground.
- Pad is sized and contoured for the generator models listed above.
- 3/8-16 threaded inserts are located at the generator mounting hole positions for easy installation.
- Pad contains 25% recycled materials.

Mounting Pad Dimensions

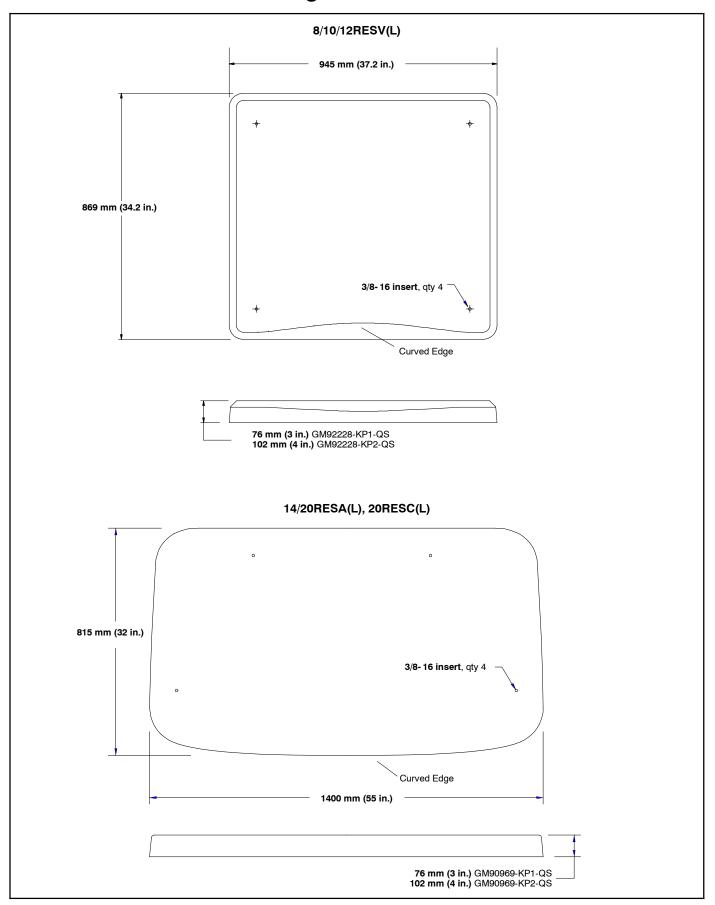

Mounting Pad Dimensions

