
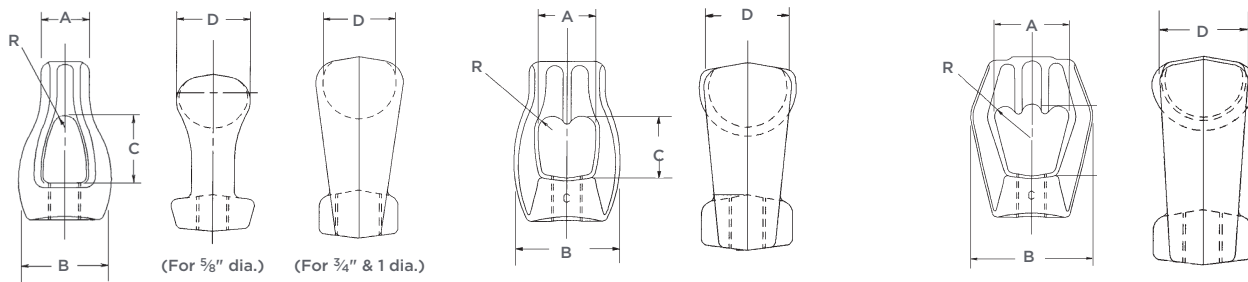


# PISA® ANCHOR RODS, EYENUTS & COUPLINGS

All components shown on this page are hot-dip galvanized per ASTM A153.

EYENUT	Catalog Number					
	Thimbleye®	Approx. Wt. Each Lbs.(Kg)	Twineye®	Approx. Wt. Each Lbs.(Kg)	Tripleye®	Approx. Wt. Each Lbs.(Kg)
For 5/8" Dia. Rods	12587*	0.8 (0.4)	12589	2.0 (0.9)	12593	2.4 (1.1)
For 3/4" & 1" Dia. Rods	6512*	2.0 (0.9)	6562	1.9 (0.9)	12585	2.1 (1.0)
For 1" Dia. H.S.+	N/A	N/A	6562H	1.8 (0.8)	12585H	2.1 (1.0)

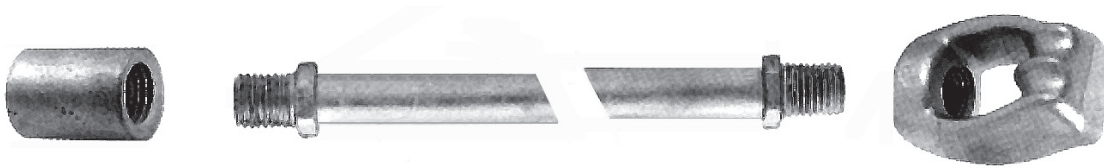

THIMBLEYE® NUTS	A	B	C	D	R	TWINEYE® NUTS	A	B	C	D	R	TRIPLEYE® NUTS	A	B	C	D	R
For 5/8" Dia. Rods	7/8"	1 7/8"	1 3/8"	1 11/64"	1/4"	For 5/8", 3/4" & 1 Dia. Rods	1 13/32"	2 25/64"	1 27/64"	1 1/2"	5/16"	"For 5/8", 3/4" & 1 Dia. Rods"	7/8"	1 7/8"	1 3/8"	1 11/64"	1/4"
For 3/4" & 1 Dia. Rods	1 1/8"	2 25/64"	1 19/32"	1 5/8"	13/32"							1 Dia. Rods"	1 3/4"	2 13/16"	1 5/8"	1 1/2"	1/4"

ROD	3 12-ft. ROD		7-ft. ROD		"Ultimate Strength" <sup>†</sup>
	Catalog Number	Approx. Wt. Each Lbs.(Kg)	Catalog Number	Approx. Wt. Each Lbs.(Kg)	
5/8" Dia.	12336P	3.2 (1.5)	12332P*	6.5 (2.9)	16,000 lbs.
3/4" Dia.	12634P	17.0 (7.7)	12632P*	9.7 (4.4)	23,000 lbs.
1" Dia.	12338P	9.0 (4.1)	12334P	17.0 (7.7)	36,000 lbs.
1" Dia. H.S.	C1021987	9.1 (4.1)	C1021986	16.9 (7.7)	50,000 lbs.

- H.S. 50,000-lb. EyenuTs are galvanized and painted orange.
- RUS Listed.

<sup>†</sup>Ultimate strength ratings apply to properly installed anchors only. Failure to install within 5° of alignment with the guy load will significantly lower strength.