



## S2-B



Two pole, one level, coding ring  
Integrated clip and marking label


**10 A 300 V**

### Socket for MRC, 8-Pin Plug-In Relay Types C2-A20, C2-G20, C2-T21



- Accepts the exclusive RELECO coding ring for coding both relay and socket
- DIN rail or panel mountable
- Removable label
- EN/DIN and sequential numbering

According to EN 60947-1 and IEC 61810-5

### Wiring Diagram

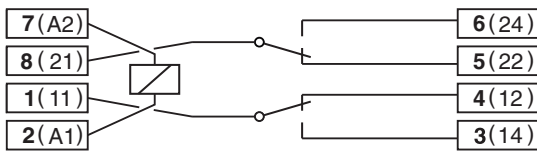

### Dimensions - mm

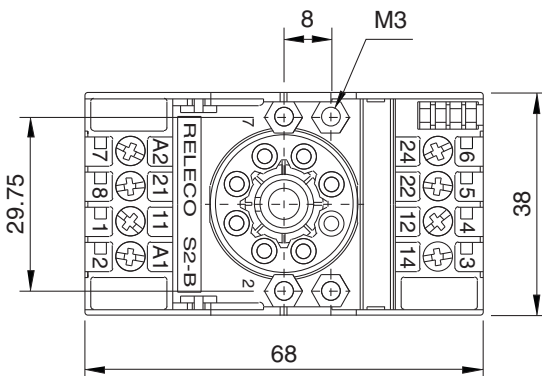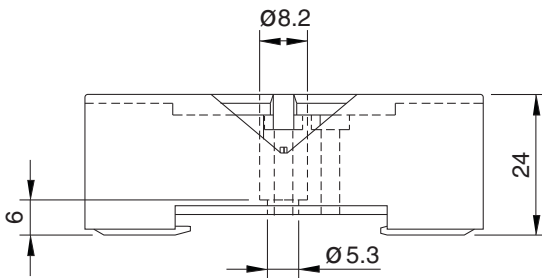

### Specifications

**Nominal Load:** 10 A/300 V

#### Insulation:

Dielectric strength, 1 minute	
Between contacts and coil	2.5 KV
Between all terminals and rail DIN	2.5 KV
Between adjacent poles	2.5 KV

#### Wire In-Lets Capacity:

Solid wire	4 mm <sup>2</sup> or 2 x 2.25 mm <sup>2</sup>
Multi-core	22-14 AWG
Ferrule tip terminals	4 mm <sup>2</sup>
Max. screw torque	1.2 Nm
Screw dimensions	M3, Pozi
Integrated hold-down clip	
Removable marking label	

