

200A Seven Jaw Polyphase Meter Socket



Now Overhead and Underground rated


Our three phase, four wire, 7 jaw meter sockets now come in a new can size, to facilitate both overhead utility entry, and underground utility entry (the old product was overhead entry only, limiting the applications of use). They are available in two styles; Bonded Neutral (P27-0), and Isolated Neutral (P27-0-IN2). An accessory is also available to convert the bonded neutral version, to isolated neutral, by installing the isolated neutral kit , PN IN20. Bottom, side and back KO's can accommodate up to 3" Conduit.

P27-0

Description	Catalogue Number	
	P27-0	P27-0-IN2
Voltage (V)	600V	600V
UPC	621037001602	621037001848
Amperes (A)	200	200
Poles	3PH 4 Wire	3PH 4 Wire
Frequency (Hz)	60	60
CSA Listed	Yes	Yes
Enclosure	Type 3R (outdoor)	Type 3R (outdoor)
Type	Bonded Neutral	Isolated Neutral
Size (Inches)	23.368 x 12.236 x 5.741	



Powering Business Worldwide

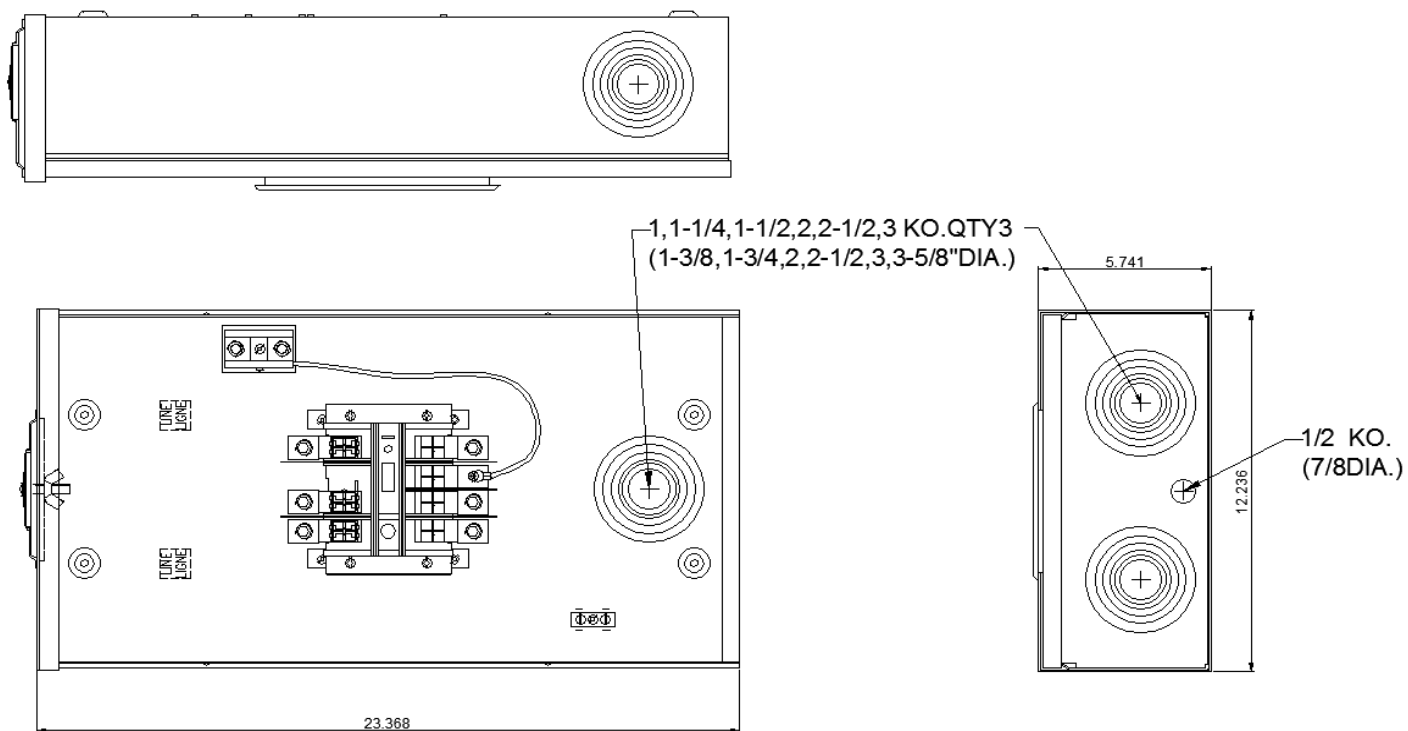

Dimensions