

Aluminum Photoluminescent RM Distributed by Beghelli

Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____

Classic aluminum frame

Screen printed image with photoluminescent background



CAN/ULC-S572

7231 series



7230 series

Thin, low profile construction and easily movable if egress path changes

Zero energy consumption and recyclable

Suitable for explosion-proof areas




INSTALLATION

The **ALUMINUM PHOTOLUMINESCENT RM** is suitable for surface, flag, ceiling or stem mounting. Before installation it must be determined that there is a minimum of 21.6lx (2fc) or 54lx (5fc) of light on the face(s) of the sign at all times during building occupancy. Suitable for both high and low-level locations.

FEATURES

- Zero energy consumption - zero cost, green design
- Zero maintenance - no bulbs, no battery replacement
- Designed for surface, flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Non-toxic, non-radioactive
- No disposal costs
- Easily movable if egress path changes
- Thin, low profile construction
- Consistent, uniform illumination
- Classic aluminum frame goes anywhere
- 15.25 m (50 ft) rated, visibility, readability
- Recyclable
- LEED point contributor

DIMENSIONS (MM, IN.)

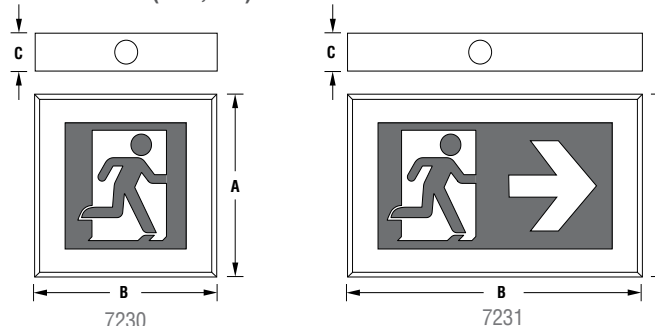

Series	A	B	C
7230	254mm 10"	254mm 10"	19mm 3/4"
7231	254mm 10"	432mm 17"	19mm 3/4"

LISTED TO

- CAN/ULC-S572 (Standard for Photoluminescent and Self Luminous Exit Signs and Path Marking Systems)
- Meets NBC 2010/2015
- 21.6 lx (2fc) at 30 minute Listing
- 54 lx (5fc) at 120 minute Listing

ORDERING INFORMATION

Series	RM Direction	Arrows	Illumination	Frame	Face #	Mounting
7230	*L (left facing)	Blank (no arrow)	Blank (5fc @ 120 min.)	SAF (silver aluminum)	Blank (single)	B (bracket)
7231	R (right facing)	**A (arrow)	2 (2fc @ 30 min.)		2 (double)	

NOTE: *Running Man Left is only available with an arrow **Arrow is only available in 7231 models

EXAMPLE: 7231-L-A-2-SAF-2-B

DESCRIPTION: Photoluminescent Running Man, left facing with arrow in 2fc, silver aluminum frame, double face, bracket mount

TECHNICAL INFORMATION

- Sizes:
 - RM with arrow - 43.8cm x 25.4cm x 1.9cm (17.24in x 10in x 0.75in)
 - RM - 25.4cm x 25.4cm x 1.9cm (10in x 10in x 0.75in)
- Illumination: High Visibility Green
- Rated Viewing Distance: 15.25 meters (50 feet)
- Directional: Running Man with or without arrow
- Construction: Aluminum framing system
- Durability: Explosion-proof/Suitable for Floor Proximity Installation

LIFE EXPECTANCY & POWER REQUIREMENTS

25+ years. No additional electrical or mechanical source required.

MODEL RATING GUIDE

Model	Light on face (lx)	Visibility time
7230-R-2-SAF-B	21.6 (2fc)	30
7230-2-SAF-2-B	21.6 (2fc)	30
7231-L-A-2-SAF-B	21.6 (2fc)	30
7231-R-A-2-SAF-B	21.6 (2fc)	30
7231-A-2-SAF-2-B	21.6 (2fc)	30
7230-R-SAF-B	54 (5fc)	120
7230-SAF-2-B	54 (5fc)	120
7231-L-A-SAF-B	54 (5fc)	120
7231-R-A-SAF-B	54 (5fc)	120
7231-A-SAF-2-B	54 (5fc)	120



Photoluminescent RM - 7230 series
Right Running Man



Photoluminescent RM - 7231 series
Left Running Man with directional arrow

Acrylic Photoluminescent RM Distributed by Beghelli

Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____

Classic aluminum frame

Non-toxic,
non-radioactive

CAN/ULC-S572



7231 series

Thin, low profile construction with consistent, uniform illumination

Zero maintenance - no bulbs, no battery replacement

Suitable for explosion-proof areas




INSTALLATION

The **ACRYLIC PHOTOLUMINESCENT RM** is suitable for surface, flag, ceiling or stem mounting. Before installation it must be determined that there is a minimum of 21.6lx (2fc) or 54lx (5fc) of light on the face(s) of the sign at all times during building occupancy. Suitable for both high and low-level locations.

FEATURES

- Zero energy consumption - zero cost, green design
- Zero maintenance - no bulbs, no battery replacement
- Designed for surface, flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Non-toxic, non-radioactive
- No disposal costs
- Easily movable if egress path changes
- Thin, low profile construction
- Consistent, uniform illumination
- Classic acrylic frame goes anywhere
- 15.25 m (50 ft) rated, visibility, readability
- Recyclable
- LEED point contributor

DIMENSIONS (MM, IN.)

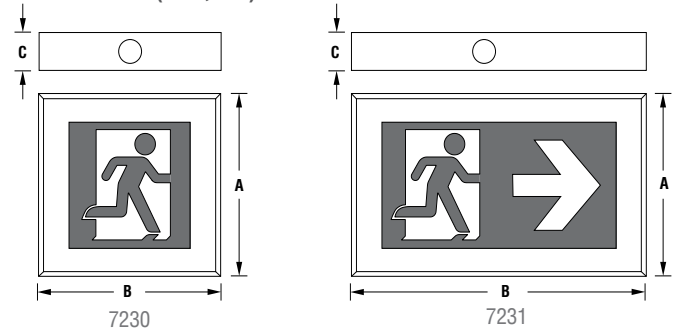

Series	A	B	C
7230	305mm 12"	235mm 9½"	25mm 1"
7231	412.75mm 16½"	305mm 12"	25mm 1"

LISTED TO

- CAN/ULC-S572 (Standard for Photoluminescent and Self Luminous Exit Signs and Path Marking Systems)
- Meets NBC 2010/2015
- 21.6 lx (2fc) at 30 minute Listing
- 54 lx (5fc) at 120 minute Listing

ORDERING INFORMATION

Series	RM Direction	Arrows	Illumination	Frame	Face #	Mounting
7230	*L (left facing)	Blank (no arrow)	Blank (5fc @ 120 min.)	ACR (acrylic)	Blank (single)	B (bracket)
7231	R (right facing)	**A (arrow)	2 (2fc @ 30 min.)		2 (double)	

NOTE: *Running Man Left is only available with an arrow **Arrow is only available in 7231 models

EXAMPLE: 7231-L-A-2-ACR-2-B

DESCRIPTION: Photoluminescent Running Man, left facing with arrow in 2fc, acrylic frame, double face, bracket mount