

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in commercial and residential applications. Ideal for use in closets, foyers, hallways, corridors, bedrooms, offices, utility work areas, outdoor covered areas, stairways and much more.

### CONSTRUCTION

This contemporary shaped fixture features a matte white acrylic diffuser on the round versions, a polycarbonate diffuser on the square versions, and a robust aluminum housing. Wet location models are equipped with protective gasketing.

### OPTICS

Produces the following lumens at 50,000 hours life (WH finish):

#### Round versions

2700 K: 612 lumens (7")/1768 lumens (13")

3000 K: 642 lumens (7")/1898 lumens (13")

4000 K: 660 lumens (7")/1985 lumens (13")

#### Square versions (available in white only)

2700 K: 480 lumens (7")/1135 lumens (13")

3000 K: 545 lumens (7")/1730 lumens (13")

4000 K: 545 lumens (7")/1730 lumens (13")

### ELECTRICAL

Fixture operates at 120 volts, 60 Hz. 7" Round standard input = 9.3 watts, 70 lumens per watt. 13" Round standard input = 28 watts, 71 lumens per watt. 7" Square standard input = 10 watts, 54 lumens per watt. 13" Square standard input = 28 watts, 61 lumens per watt.

Works with most standard incandescent dimmers (see list of suggested dimmers on page 2).

### INSTALLATION

All mounting hardware included. Suitable for use within closet storage spaces when installed per NEC requirements.

### LISTINGS

All 7" sizes and 13" square and 7" round are CSA certified for sale in the USA and Canada. The 13" round size is UL listed for sale in the USA and Canada.

Also certified for Damp Location. For Wet Location the WL OPTION must be added to model number. ENERGY STAR® certified

Round Versi U.S. Patent No. D691,763. Square Versi Patent Pending.

### WARRANTY


5-year limited warranty. Complete warranty terms located at:

[www.acuitybrands.com/support/customer-support/terms-and-conditions](http://www.acuitybrands.com/support/customer-support/terms-and-conditions)

**NOTE:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.



#### Square Specifications

7" Height: 1-3/4 (4.4)

7" Width: 7 (18)

7" Weight: 1.15 lbs (.52 kg)

13" Height: 2-3/4 (6.98)

13" Width: 13 (33.0)

13" Weight: 4.10 lbs (1.86 kg)



#### Round Specifications

7" Height: 1-3/4 (4.4)


7" Width: 7-1/4 (18.4)

7" Weight: 1.1 lbs (.5 kg)

13" Height: 2-1/2 (6.4)

13" Width: 13 (33.0)

13" Weight: 3.2 lbs (1.45 kg)



All dimensions are in inches (centimeters) unless otherwise indicated.

Decorative Indoor

# Versi Lite™ LED Flush Mount

HIGH-PERFORMANCE LED



### ORDERING INFORMATION

For shortest lead times, configure product using **standard options (shown in bold)**.

**Example:** FMML 7 840 WL

FMML					
Series	Size	CRI	Color temperature	Fixture finish	Option
FMML LED Versi Lite flush mount	7 7" diameter	8 >80	40 4000 K	(blank) Textured white	WL Wet location
	13 13" diameter		35 3500 K	DDBT Textured bronze	
			30 3000 K	DNA Natural aluminum	
			27 2700 K		

### ORDERING INFORMATION

For shortest lead times, configure product using **standard options (shown in bold)**.

**Example:** FMML 7 840 WL

FMML					
Series	Size	CRI	Color temperature	Fixture finish	Option
FMMSQL LED Square Versi Lite flush mount <sup>1</sup>	7 7" Width	8 >80	40 4000 K	(blank) Textured white	WL Wet location
	13 13" Width				

### Notes

1 FMMSQL available in Textured White only.

See Replacement Parts next page.

Replacement parts: <i>Order as separate catalog number.</i>	
DFMML 7	7" round acrylic diffuser
DFMML13	13" round acrylic diffuser

LIGHTING FACTS

Lithonia Lighting

LED

lighting facts®

A Program of the U.S. DOE

Light Output (Lumens)	612
Watts	10.35
Lumens per Watt (Efficacy)	59

Color Accuracy

Color Rendering Index (CRI)

85

Light Color

Correlated Color Temperature (CCT)

2700 (Warm White)

2700K

3000K

4500K

6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-5ECDFF (7/19/2013)  
Model Number: FMML 7 827  
Type: Surface-mounted fixture (other)

Lithonia Lighting

LED

lighting facts®

A Program of the U.S. DOE

Light Output (Lumens)	642
Watts	10.2
Lumens per Watt (Efficacy)	63

Color Accuracy

Color Rendering Index (CRI)

85

Light Color

Correlated Color Temperature (CCT)

3000 (Bright White)

2700K

3000K

4500K

6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-B45YJQ (7/19/2013)  
Model Number: FMML 7 830  
Type: Surface-mounted fixture (other)

Lithonia Lighting

LED

lighting facts®

A Program of the U.S. DOE

Light Output (Lumens)	659
Watts	9.4
Lumens per Watt (Efficacy)	70

Color Accuracy

Color Rendering Index (CRI)

85

Light Color

Correlated Color Temperature (CCT)

4000 (Bright White)

2700K

3000K

4500K

6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-QSEG7G (8/6/2013)  
Model Number: FMML 7 840 [UPGRADE 07/2013]  
Type: Luminaire - Other

Lithonia Lighting

LED

lighting facts®

A Program of the U.S. DOE

Light Output (Lumens)	1765
Watts	28
Lumens per Watt (Efficacy)	63.04

Color Accuracy

Color Rendering Index (CRI)

83

Light Color

Correlated Color Temperature (CCT)

2700 (Warm White)

2700K

3000K

4500K

6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-QZ3KAC (7/14/2015)  
Model Number: FMML 13827  
Type: Luminaire - Decorative

LITHONIA LIGHTING

LED

lighting facts®

A Program of the U.S. DOE

Light Output (Lumens)	1898
Watts	28.06
Lumens per Watt (Efficacy)	67.64

Color Accuracy

Color Rendering Index (CRI)

82

Light Color

Correlated Color Temperature (CCT)

2978 (Warm White)

2700K

3000K

4500K

6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-BTFSWB (6/9/2015)  
Model Number: FMML 13830  
Type: Luminaire - Decorative

LITHONIA LIGHTING

LED

lighting facts®

A Program of the U.S. DOE

Light Output (Lumens)	1984
Watts	27.79
Lumens per Watt (Efficacy)	71.39

Color Accuracy

Color Rendering Index (CRI)

84

Light Color

Correlated Color Temperature (CCT)

3899 (Bright White)

2700K

3000K

4500K







6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-IUFPKA (6/9/2015)  
Model Number: FMML 13840  
Type: Luminaire - Decorative

## LIGHTING FACTS

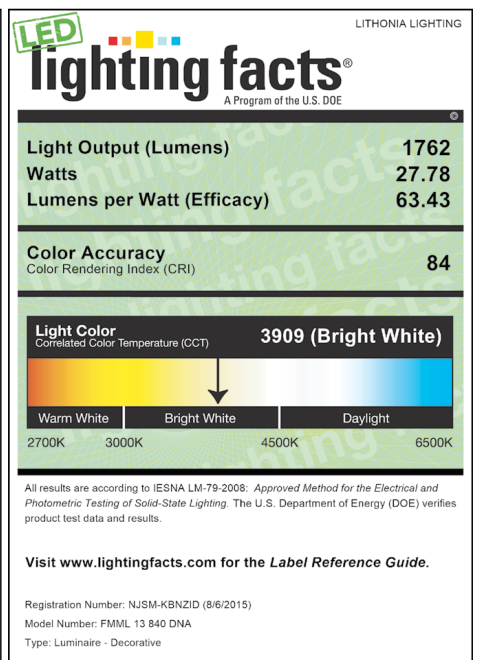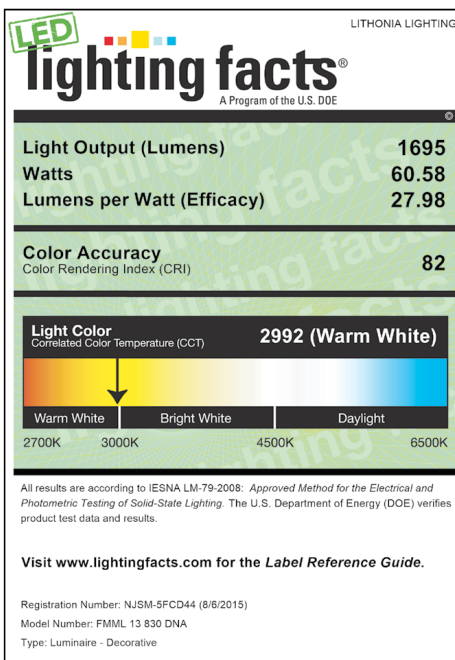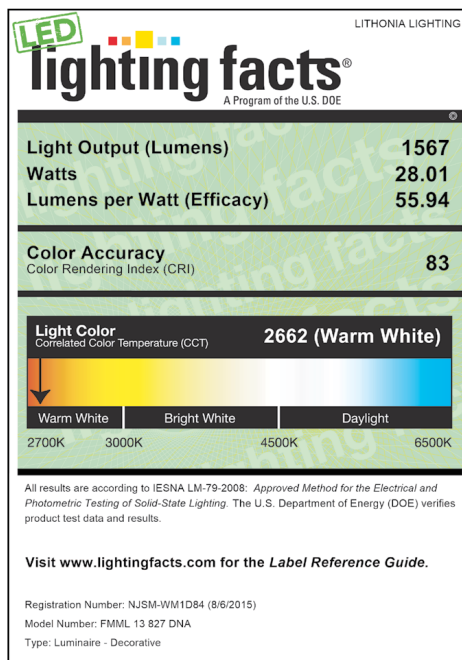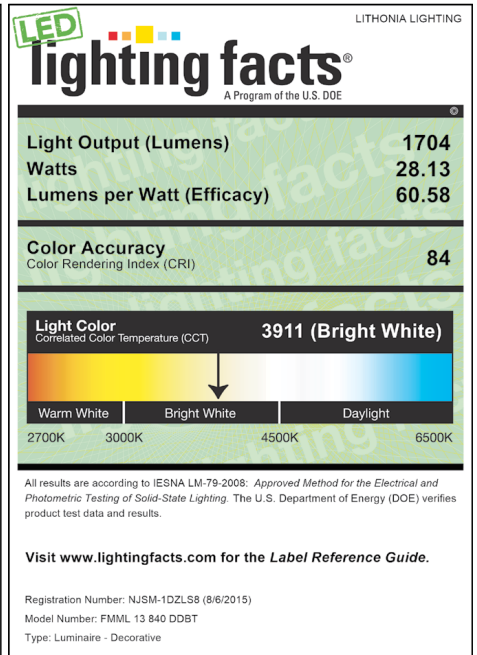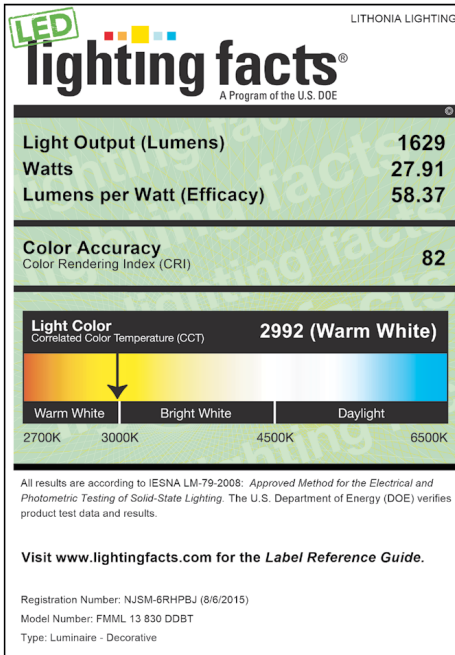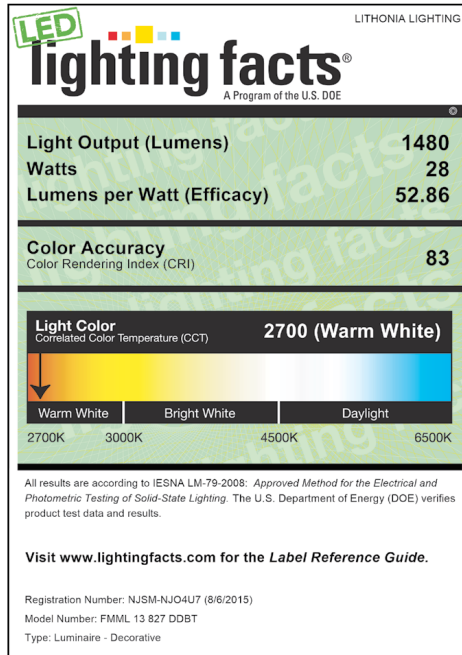

### Suggested Dimmers

The FMML is designed to operate with most standard Triac Based dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.

Manufacturer	Part Number (s)	Manufacturer	Part Number (s)
Leviton	6633P	Lutron	NTELV 300
Leviton	IPL06	Lutron	NLV 600
Leviton	6674P	Synergy	ISD 600/120
Leviton	IPE04	Pass & Seymour	HCL 453PTCCV6 (13" only)
Lutron	DVELV 300P		