



LED Tapes and Extrusions


STANDARD LED tapes allow the customization of any area, as they can be surface mounted, recessed or suspended. These professional grade flexible LED tapes are ideal for a wide variety of applications, such as cabinetry, shelving, toe kicks, coves, edge lighting, etc.

Made of high quality LED chips, STANDARD's tapes offer durability, dimmability, high efficacy, constant colour and a CRI above 90. They will easily adapt to all task or accent lighting needs.

The tapes can be installed on their own with peel and stick 3M construction adhesive back or within a covered aluminum extrusion for a diffused effect. A wide variety of accessories are also available to complete the luminaire and allow for easy assembly; no soldering is needed with STANDARD's range of sturdy connectors.

All STANDARD tapes, extrusions and lenses are also offered in custom lengths. Contact our inside sales team with your requirements to receive a quote on made to measure components.

Note: a minimum of ¼ inch must be kept free of tape at each end of the extrusion length to allow for the end caps.

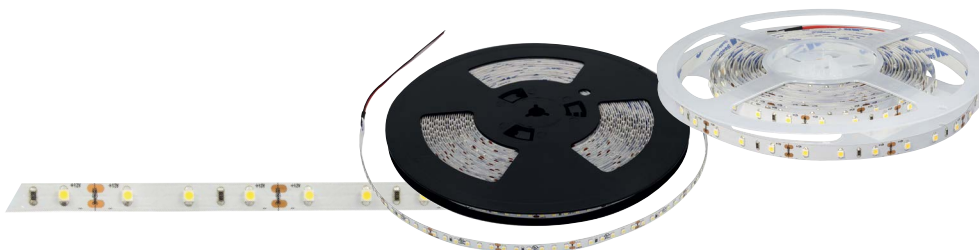


LED Tapes

| Order code | Description | Order code for custom length | Watts | | Volts (VDC) | Colour temp. (K) | Lumen output (lm) | | CRI | Life L70 (hrs) | Number of LED chips | | Case qty (master) |
|---|--------------------------------------|------------------------------|-----------|---------|-------------|------------------|-------------------|---------|-----|----------------|---------------------|---------|-------------------|
| | | | (per ft.) | (per m) | | | (per ft.) | (per m) | | | (per ft.) | (per m) | |
| 12 V - 16.4' (5 m) | | | | | | | | | | | | | |
| 65895 ³ | LED/TAPE/16.4'/1.5W/30K/12V/IP22/STD | 66327 ^{1 4} | 1.5 | 4.8 | 12 | 3 000 | 110 | 360 | ≥90 | 50 000 | 18 | 60 | 25 |
| 65880 ³ | LED/TAPE/16.4'/1.5W/40K/12V/IP22/STD | 66328 ^{1 4} | 1.5 | 4.8 | 12 | 4 000 | 123 | 405 | ≥90 | 50 000 | 18 | 60 | 25 |
| 24 V - 16.4' (5 m) | | | | | | | | | | | | | |
| 65881 ³ | LED/TAPE/16.4'/1.5W/30K/24V/IP22/STD | 66329 ^{1 4} | 1.5 | 4.8 | 24 | 3 000 | 107 | 350 | ≥90 | 50 000 | 18 | 60 | 25 |
| 65882 ³ | LED/TAPE/16.4'/1.5W/40K/24V/IP22/STD | 66330 ^{1 4} | 1.5 | 4.8 | 24 | 4 000 | 109 | 356 | ≥90 | 50 000 | 18 | 60 | 25 |
| 65883 ³ | LED/TAPE/16.4'/2.9W/24K/24V/IP22/STD | 66331 ^{1 4} | 2.9 | 9.6 | 24 | 2 400 | 172 | 566 | ≥90 | 50 000 | 37 | 120 | 25 |
| 65884 ³ | LED/TAPE/16.4'/2.9W/27K/24V/IP22/STD | 66332 ^{1 4} | 2.9 | 9.6 | 24 | 2 700 | 191 | 625 | ≥90 | 50 000 | 37 | 120 | 25 |
| 65885 ³ | LED/TAPE/16.4'/2.9W/30K/24V/IP22/STD | 66334 ^{1 4} | 2.9 | 9.6 | 24 | 3 000 | 194 | 635 | ≥90 | 50 000 | 37 | 120 | 25 |
| 65886 ³ | LED/TAPE/16.4'/2.9W/35K/24V/IP22/STD | 66333 ^{1 4} | 2.9 | 9.6 | 24 | 3 500 | 204 | 670 | ≥90 | 50 000 | 37 | 120 | 25 |
| 65887 ³ | LED/TAPE/16.4'/2.9W/40K/24V/IP22/STD | 66338 ^{1 4} | 2.9 | 9.6 | 24 | 4 000 | 226 | 740 | ≥90 | 50 000 | 37 | 120 | 25 |
| 65888 ³ | LED/TAPE/16.4'/2.9W/50K/24V/IP22/STD | 66335 ^{1 4} | 2.9 | 9.6 | 24 | 5 000 | 228 | 749 | ≥90 | 50 000 | 37 | 120 | 25 |
| 65889 ³ | LED/TAPE/16.4'/4.4W/30K/24V/IP22/STD | 66336 ^{1 4} | 4.4 | 14.5 | 24 | 3 000 | 300 | 984 | ≥90 | 50 000 | 55 | 180 | 25 |
| 65890 ³ | LED/TAPE/16.4'/4.4W/40K/24V/IP22/STD | 66337 ^{1 4} | 4.4 | 14.5 | 24 | 4 000 | 314 | 1 030 | ≥90 | 50 000 | 55 | 180 | 25 |
| 24 V - 16.4' (5 m) - IP67 wet location | | | | | | | | | | | | | |
| 65893 ^{2 3} | LED/TAPE/16.4'/2.9W/30K/24V/IP67/STD | - | 2.9 | 9.6 | 24 | 3 000 | 186 | 609 | ≥90 | 50 000 | 37 | 120 | 25 |
| 65894 ^{2 3} | LED/TAPE/16.4'/2.9W/40K/24V/IP67/STD | - | 2.9 | 9.6 | 24 | 4 000 | 213 | 697 | ≥90 | 50 000 | 37 | 120 | 25 |
| 24 V - 65.6' (20 m) | | | | | | | | | | | | | |
| 65891 ³ | LED/TAPE/65.6'/2.9W/30K/24V/IP22/STD | 66334 ^{1 4} | 2.9 | 9.6 | 24 | 3 000 | 194 | 635 | ≥90 | 50 000 | 37 | 120 | 25 |
| 65892 ³ | LED/TAPE/65.6'/2.9W/40K/24V/IP22/STD | 66338 ^{1 4} | 2.9 | 9.6 | 24 | 4 000 | 226 | 740 | ≥90 | 50 000 | 37 | 120 | 25 |

04

Dimensions & Cuts

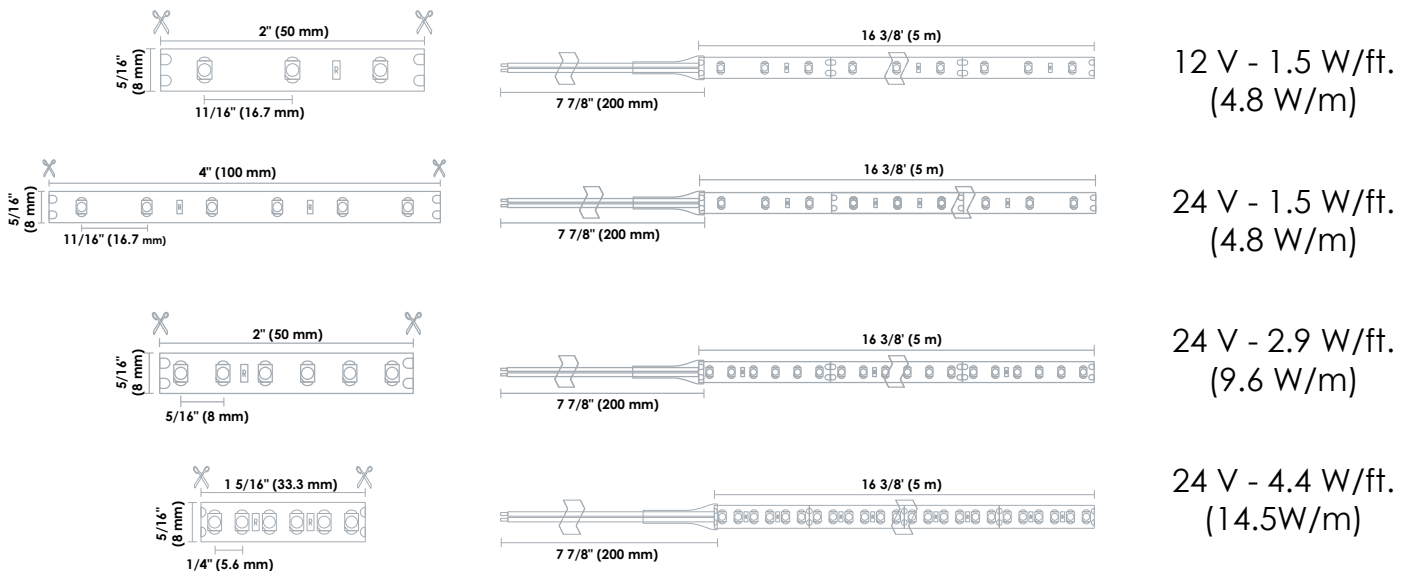

Lumen values are derived from photometric testing
 For complete warranty information, please visit www.standardpro.com
¹ Available in custom lengths with the alternative order code
² STANDARD will assume no responsibility for any issue related to field cutting or terminating of IP67 tapes, resulting of poor workmanship
³ The LED tape reels are not returnable if already cut
⁴ Custom lengths of LED tapes are non-cancelable and non-returnable

