



ALL PURPOSE

OSR-NA Series



120V PREASSEMBLED

OSR-PI Series




POTABLE WATER

OSR-MA-BF Series

Pipe tracing for freeze protection

Self-regulating heating cables are designed to compensate for heat lost from insulated pipe and piping systems. While insulated pipes retain heat much longer than uninsulated pipes, the operating temperature will eventually reach the surrounding ambient temperature. If ambient temperatures drop below freezing, an unsafe condition may arise if the components within the pipe fall below freezing temperatures.

- Suitable for metal or plastic pipes
- Approved for indoor and outdoor use

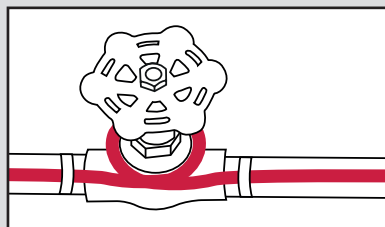

- **Approved for potable water pipes**
The BF version of OSR-MA cables will protect your potable water pipes from freezing.
- **Extremely flexible cables**
These cables are especially useful for installations which require smaller overall cable dimensions and shorter heating circuits.

TRADITIONAL HEATING

Convectors

OCE		European-Style			6	
Watts	Volts	Product #	Product #	Product #	Length	
		Non Program-mable Built-In Thermostat ¹	Non Programmable Wall-Mounted Thermostat Included ²	Programmable Wall-Mounted Thermostat Included ²	in.	mm
OCEH Height: 27" (685 mm)						
500/375	240/208	OCEH0500-TH	OCEH0500-OTH	OCEH0500-T600	10 5/8	270
750/563	240/208	OCEH0750-TH	OCEH0750-OTH	OCEH0750-T600	13 1/2	344
1000/750	240/208	OCEH1000-TH	OCEH1000-OTH	OCEH1000-T600	16 1/2	418
1250/938	240/208	OCEH1250-TH	OCEH1250-OTH	OCEH1250-T600	19 7/16	492
1500/1125	240/208	OCEH1500-TH	OCEH1500-OTH	OCEH1500-T600	23	584
1750/1313	240/208	OCEH1750-TH	OCEH1750-OTH	OCEH1750-T600	26 1/2	674
2000/1500	240/208	OCEH2000-TH	OCEH2000-OTH	OCEH2000-T600	28 1/8	714
2500/1875	240/208	OCEH2500-TH	OCEH2500-OTH	OCEH2500-T600	34	862
3000/2250	240/208	OCEH3000-TH	OCEH3000-OTH	OCEH3000-T600	41 1/8	1044
OCEB Height: 18 1/2" (470 mm)						
500/375	240/208	OCEM0500-TH	OCEM0500-OTH	OCEM0500-T600	13 1/2	344
750/563	240/208	OCEM0750-TH	OCEM0750-OTH	OCEM0750-T600	16 1/2	418
1000/750	240/208	OCEM1000-TH	OCEM1000-OTH	OCEM1000-T600	19 7/16	492
1250/938	240/208	OCEM1250-TH	OCEM1250-OTH	OCEM1250-T600	23	584
1500/1125	240/208	OCEM1500-TH	OCEM1500-OTH	OCEM1500-T600	26 1/2	674
1750/1313	240/208	OCEM1750-TH	OCEM1750-OTH	OCEM1750-T600	30 5/16	769
2000/1500	240/208	OCEM2000-TH	OCEM2000-OTH	OCEM2000-T600	34	862
2500/1875	240/208	OCEM2500-TH	OCEM2500-OTH	OCEM2500-T600	41 1/8	1044
3000/2250	240/208	OCEM3000-TH	OCEM3000-OTH	OCEM3000-T600	48 3/8	1229
OCEB Height: 14" (356 mm)						
500/375	240/208	OCEB0500-TH	OCEB0500-OTH	OCEB0500-T600	19 7/16	492
750/563	240/208	OCEB0750-TH	OCEB0750-OTH	OCEB0750-T600	23	584
1000/750	240/208	OCEB1000-TH	OCEB1000-OTH	OCEB1000-T600	26 1/2	674
1250/938	240/208	OCEB1250-TH	OCEB1250-OTH	OCEB1250-T600	34	862
1500/1125	240/208	OCEB1500-TH	OCEB1500-OTH	OCEB1500-T600	36 3/8	924
1750/1313	240/208	OCEB1750-TH	OCEB1750-OTH	OCEB1750-T600	41 1/8	1044
2000/1500	240/208	OCEB2000-TH	OCEB2000-OTH	OCEB2000-T600	46 7/16	1179
2500/1875	240/208	OCEB2500-TH	OCEB2500-OTH	OCEB2500-T600	62 3/16	1579
3000/2250	240/208	OCEB3000-TH	OCEB3000-OTH	OCEB3000-T600	69 5/16	1760

¹ Almond product comes with almond built-in thermostat.

² Wall-mounted thermostat is white.

OCT		Contemporary			6	
Watts	Volts	Product #	Product #	Product #	Length	
		Without Thermostat ¹	Non Programmable Integrated Thermostat	Programmable Integrated Thermostat	in.	mm
500/375	240/208	OCT0500	OCT0500-TH	OCT0500-THP	18	457
750/563	240/208	OCT0750	OCT0750-TH	OCT0750-THP	20 3/4	527.5
1000/750	240/208	OCT1000	OCT1000-TH	OCT1000-THP	23 9/16	598
1250/938	240/208	OCT1250	OCT1250-TH	OCT1250-THP	26 5/16	668.5
1500/1125	240/208	OCT1500	OCT1500-TH	OCT1500-THP	29 1/16	739
1750/1313	240/208	OCT1750	OCT1750-TH	OCT1750-THP	31 7/8	809.5
2000/1500	240/208	OCT2000	OCT2000-TH	OCT2000-THP	34 5/8	880

¹ The OCT warranty is valid only if the heater is controlled by a proportional electronic pulsing line thermostat with a cycle of 15 seconds maximum.

ONC		Standard			6	
Volts	Watts	Product #	Product #	Length		
		Without Thermostat	Built-in Thermostat	in.	mm	
120	500	ONC0502BL	ONC0502BL-TH	18	457	
120	1000	ONC1002BL	ONC1002BL-TH	23 9/16	598	
120	1500	ONC1502BL	ONC1502BL-TH	29 1/16	739	
208	500	ONC0508BL	ONC0508BL-TH	18	457	
208	1000	ONC1008BL	ONC1008BL-TH	23 9/16	598	
208	1500	ONC1508BL	ONC1508BL-TH	29 1/16	739	
208	2000	ONC2008BL	ONC2008BL-TH	34 5/8	880	
240/208	500/375	ONC0500BL	ONC0500BL-TH	18	457	
240/208	1000/750	ONC1000BL	ONC1000BL-TH	23 9/16	598	
240/208	1500/1125	ONC1500BL	ONC1500BL-TH	29 1/16	739	
240/208	2000/1875	ONC2000BL	ONC2000BL-TH	34 5/8	880	

Electric Baseboards

ODL		High-End			8	
Watts	Watts 240/208V	Product #	Product #	Product #	Length	
		120V	208V	240/208V	in.	mm
300	300/225	ODL0302	ODL0308	ODL0300	24 5/8	625
500	500/375	ODL0502	ODL0508	ODL0500	29 1/2	750
750	750/563	ODL0752	ODL0758	ODL0750	39 1/2	1004
1000	1000/750	ODL1002	ODL1008	ODL1000	49 13/16	1265
1250	1250/938	ODL1252	ODL1258	ODL1250	59 1/4	1506
1500	1500/1125	ODL1502	ODL1508	ODL1500	68	1727
1750	1750/1313	-	ODL1758	ODL1750	77 5/16	1964
2000	2000/1500	-	ODL2008	ODL2000	86 1/8	2187
2250	2250/1688	-	ODL2258	ODL2250	94 15/16	2412
2500	2500/1875	-	ODL2508	ODL2500	104 1/16	2644

OFM		Standard			8	
Watts	Watts 240/208V	Product #	Product #	Product #	Length	
		120V	208V	240/208V	in.	mm
300	300/225	OFM0302	OFM0308	OFM0300	22 5/16	566
500	500/375	OFM0502	OFM0508	OFM0500	27 3/16	691
750	750/563	OFM0752	OFM0758	OFM0750	37 3/16	945
1000	1000/750	OFM1002	OFM1008	OFM1000	47 1/2	1206
1250	1250/938	OFM1252	OFM1258	OFM1250	57	1447
1500	1500/1125	OFM1502	OFM1508	OFM1500	65 11/16	1668
1750	1750/1313	-	OFM1758	OFM1750	75	1905
2000	2000/1500	-	OFM2008	OFM2000	83 13/16	2128
2250	2250/1688	-	OFM2258	OFM2250	92 5/8	2353
2500	2500/1875	-	OFM2508	OFM2500	101 13/16	2585

OPP		Patio Door			8	
Watts	Product # 208V	Watts	Product #	Length		
		240/208V	240/208V	in.	mm	
500	OPP0508	500/375	OPP0500	33 1/2	855	
750	OPP0758	750/563	OPP0750	48	1219	
1000	OPP1008	1000/750	OPP1000	60	1525	
1250	OPP1258	1250/938	OPP1250	72	1830	
1500	OPP1508	1500/1125	OPP1500	86 3/4	2204	
1750	OPP1758	1750/1313	OPP1750	100	2542	
2000	OPP2008	2000/1500	OPP2000	113 5/16	2879	

OPPM		Mini Patio Door			8	
Watts	Product # 120V	Watts	Product #	Length		
		240/208V	240/208V	in.	mm	
300	OPPM0302	300/225	OPPM0300	23 5/8	600	
450	OPPM0452	450/338	OPPM0450	35 7/16	900	
600	OPPM0602	600/450	OPPM0600	47 1/4	1200	
750	OPPM0752	750/563	OPPM0750	59 1/16	1500	
900	OPPM0902	900/675	OPPM0900	70 7/8	1800	
1050	OPPM1052	1050/788	OPPM1050	82 11/16	2100	
1200	OPPM1202	1200/900	OPPM1200	94 1/2	2400	
1350	OPPM1352	1350/1013	OPPM1350	106 5/16	2700	

Wall Radiant Cove Heater

ORC		Radiant Cove Heater			10	
Watts	Product # 120V	Product #	Length			
		208V	240V	in.	mm	
450	ORC0452	ORC0458	ORC0450	34	864	
600	ORC0602	ORC0608	ORC0600	47	1194	
750	ORC0752	ORC0758	ORC0750	59	1499	
900	ORC0902	ORC0908	ORC0900	71	1803	
1050	ORC1052	ORC1058	ORC1050	83	2108	
1200	ORC1202	ORC1208	ORC1200	94	2388	
1500	ORC1502	ORC1508	ORC1500	113	2870	

Bathroom Fan Heaters

OHY	Convection and Fan Heater		12
Watts	Volts	Product #	
2000	240	OHY2000-TH¹	

¹ BEWARE: Not available for 208V.

OVN Electronic 12

Watts	Volts	Product #	
min. 750/563	max. 1500/1125	240/208	OVN1500-TH

OVE European-Style 12

Watts	Volts	Product #	
1500	120	OVE1502¹	
1500	120	OVE1502-T	
1500	120	OVE1502-TM	
1500/1125	240/208	OVE1500¹	
1500/1125	240/208	OVE1500-T	
1500/1125	240/208	OVE1500-TM	

¹ Requires non pulsing wall-mounted thermostat.

Compact Fan Heaters

OFB Compact Wall 14

Watts¹	Volts	Product #	
750 1500	120	OFB1502BL	
750/563 1500/1125	240	OFB1500BL	

¹ Wattage can be selected on site (750W or 1500W).

OVRP Compact Ceiling 14

Watts	Watts 240/208V	Product # 120V	Product # 240/208V
500	500/375	OVRP0502	OVRP0500
750	750/563	OVRP0752	OVRP0750
1000	1000/750	OVRP1002	OVRP1000
1250	1250/938	OVRP1252	OVRP1250
1500	1500/1125	OVRP1502	OVRP1500

OVS Residential Wall 14

Watts	Watts 240/208V	Product # 120V	Product # 208V	Product # 240/208V
500	500/375	OVS0502	-	OVS0500
750	750/563	OVS0752	-	OVS0750
1000	1000/750	OVS1002	-	OVS1000
1250	1250/938	OVS1252	-	OVS1250
1500	1500/1125	OVS1502	-	OVS1500
2000	2000/1500	-	OVS2008	OVS2000

Kickspace and Floor Insert Fan Heaters

OCP Kickspace 16

Watts	Volts	Product #	
500 1000	120	OCPU1002	
500/375 1000/750	240/208	OCPU1000	

OFH Floor Insert 16

Watts	Volts	Product #	
500	120	OFH0502	
1000	120	OFH1002	
1500	120	OFH1502	
500/375	240/208	OFH0500	
1000/750	240/208	OFH1000	
1500/1125	240/208	OFH1500	

Patio Infrared Heater

OCF Patio Infrared Heater 18

Watts	Volts	Product #¹	Grounded 3-pronged outlet	Length in.	mm
1500	120	CF15120B	15A, 120VAC	27	685.8
3000/2250	240/208	CF30240B	-	38 5/8	965.2

¹ Mounting brackets included.

HEATING FOR GARAGES

Unit Heaters and Portable Heater

ODS Ceiling Fan Heater 20

Watts	Volts (ph)	Product #	Volts (ph)	Product #	cfm	Temperature Rise		Motor	
						°C	°F	HP	rpm
ODSA Surface									
2000	240 (1)	ODSA02000	240 (3)	ODSA02030¹	310	11	20	1/50	1550
3000	240 (1)	ODSA03000	240 (3)	ODSA03030¹	310	17	30	1/50	1550
4000	240 (1)	ODSA04000	240 (3)	ODSA04030¹	310	23	41	1/50	1550
5000	240 (1)	ODSA05000¹	240 (3)	ODSA05030¹	310	28	51	1/50	1550
2000	208 (1)	ODSA02008	208 (3)	ODSA02038¹	310	11	20	1/50	1550
3000	208 (1)	ODSA03008	208 (3)	ODSA03038¹	310	17	30	1/50	1550
4000	208 (1)	ODSA04008	208 (3)	ODSA04038¹	310	23	41	1/50	1550
5000	208 (1)	ODSA05008¹	208 (3)	ODSA05038¹	310	28	51	1/50	1550
ODSB Surface									
7500	240 (1)	ODSB07500¹	240 (3)	ODSB07530¹	600	22	39	1/33	1550
10000	240 (1)	ODSB10000¹	240 (3)	ODSB10030¹	600	29	53	1/33	1550
7500	208 (1)	ODSB07508¹	208 (3)	ODSB07538¹	600	22	39	1/33	1550
9900	208 (1)	ODSB09908¹	208 (3)	ODSB09938¹	600	29	53	1/33	1550
ODSR Recessed									
2000	240 (1)	ODSR02000	240 (3)	ODSR02030¹	310	11	20	1/50	1550
3000	240 (1)	ODSR03000	240 (3)	ODSR03030¹	310	17	30	1/50	1550
4000	240 (1)	ODSR04000	240 (3)	ODSR04030¹	310	23	41	1/50	1550
5000	240 (1)	ODSR05000¹	240 (3)	ODSR05030¹	310	28	51	1/50	1550
2000	208 (1)	ODSR02008	208 (3)	ODSR02038¹	310	11	20	1/50	1550
3000	208 (1)	ODSR03008	208 (3)	ODSR03038¹	310	17	30	1/50	1550
4000	208 (1)	ODSR04008	208 (3)	ODSR04038¹	310	23	41	1/50	1550
5000	208 (1)	ODSR05008¹	208 (3)	ODSR05038¹	310	28	51	1/50	1550

¹ Built-in 240V contactor.

OAE Economical Unit Heater 20

Watts	Volts	Product #¹	BTU/hr
2000/1500	240/208	OAE2000AM-EO-TB6	6824/5118
3000/2250	240/208	OAE3000AM-EO-TB6	10236/7677
5000/3750	240/208	OAE5000AM-EO-TB6	17060/12795

¹ Mounting brackets included.

OCC Portable Construction Heater 20

Watts	Volts	Product #	Motor type	Grounded 3-pronged outlet
4800/3600	240/208	OCC4800AM-MF-TB6	Enclosed	30A, 250VAC
4800/3600	240/208	OCC4800AM-MO-TB6	Open	30A, 250VAC
4800/3600	240/208	OCC4800AMWB-MO-TB6¹	Open	30A, 250VAC
4800/3600	240/208	OCC4800AMRF-MO-TB6¹	Open	-

¹ Mounting bracket included.