

# CAB® Bosserman Clips


**CAB® Bosserman Clips** are widely respected for their superior ability to safely suspend electrical cables and wiring in a variety of underground applications. CAB Bosserman Clips feature a 100% plastisol coated high tensile spring steel body and locking arm to prevent pull out and slippage. This improved hanger combines all the advantages of steel and plastic for the highest level of performance and safety underground.

## Advantages of Bosserman Clips:

- ✓ **Highly Corrosion Resistant.** Outlasts other cable support methods for cost savings and improved safety. Specified for demanding underground conditions.
- ✓ **Slip Resistant.** Plastisol coated locking arm securely grips messenger wire. Assures uniform spacing, even in steep slopes. Keeps cables safely up and out of the way of moving equipment and machinery.
- ✓ **Totally insulated and spark resistant.** High dielectric grade, flame retardant plastisol is applied on 100% of hanger surface for maximum safety and protection.



*CAB Bosserman Clips are an industry favorite for strong, durable cable support in highly corrosive environments.*

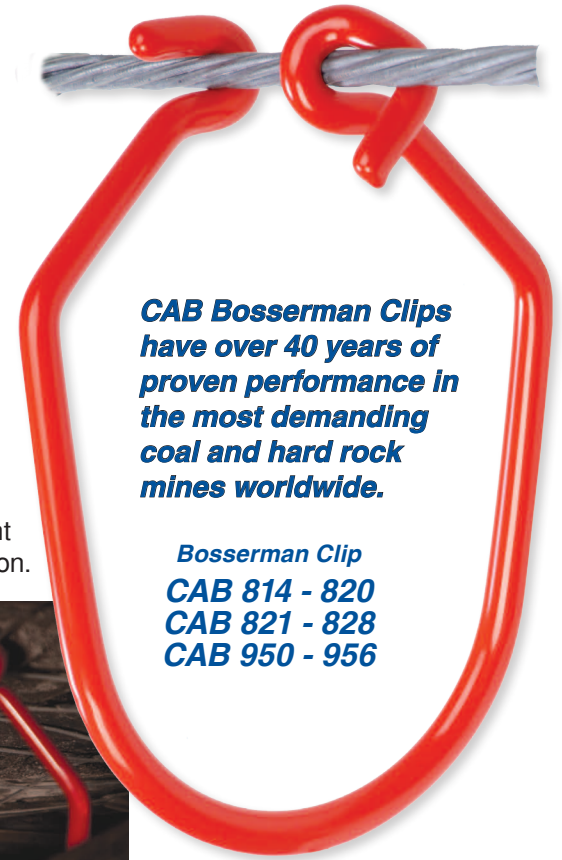


**CAB Bosserman Clips have over 40 years of proven performance in the most demanding coal and hard rock mines worldwide.**

*Bosserman Clip*  
**CAB 814 - 820**  
**CAB 821 - 828**  
**CAB 950 - 956**

**CAB 824**

*CAB's innovative design allows Bosserman Clips to install with a simple twisting motion and securely lock in place. No tools required, and hangers safely hold over 150lb (68kg). Pictured above is CAB Bosserman Clip 824.*

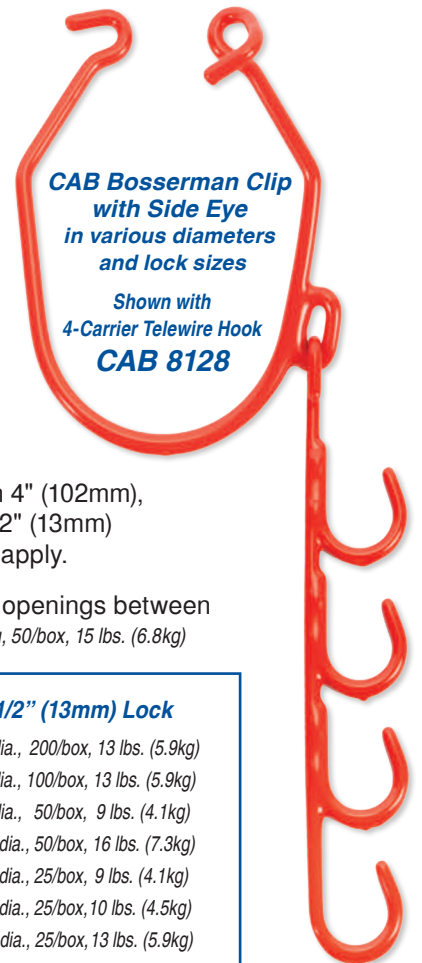

**CAB Bosserman Clip with Side Eye in various diameters and lock sizes**

*Shown with*  
**4-Carrier Telewire Hook**  
**CAB 8128**

## CAB® Bosserman Clips with Side Eye

Welded side eye useful for hanging CAB single or multiple carrier telewire hooks. Available in 4" (102mm), 5" (127 mm), 6" (152mm) and 8" (203mm) diameter sizes. Fits 1/4" (6mm), 3/8" (10mm), and 1/2" (13mm) messenger wire. Contact CAB for part numbers and additional information. Some minimums apply.

**CAB® 4-Carrier Telewire Hook** features four 1-1/4" (32mm) carriers with 5/8" (16mm) openings between carriers and 1/2" (13mm) top loop. Totally coated for added durability. **CAB 8128** 14" (356mm) long, 50/box, 15 lbs. (6.8kg)

### **Bosserman Clip 1/4" (6mm) Lock**

- CAB 814** 1" (25mm) dia., 200/box, 13 lbs. (5.9kg)
- CAB 815** 2" (51mm) dia., 100/box, 13 lbs. (5.9kg)
- CAB 816** 3" (76mm) dia., 50/box, 9 lbs. (4.1kg)
- CAB 817** 4" (102mm) dia., 50/box, 16 lbs. (7.3kg)
- CAB 818** 5" (127mm) dia., 25/box, 9 lbs. (4.1kg)
- CAB 819** 6" (152mm) dia., 25/box, 10 lbs. (4.5kg)
- CAB 820** 8" (203mm) dia., 25/box, 13 lbs. (5.9kg)

### **Bosserman Clip 3/8" (10mm) Lock**

- CAB 821** 1" (25mm) dia., 200/box, 13 lbs. (5.9kg)
- CAB 822** 2" (51mm) dia., 100/box, 13 lbs. (5.9kg)
- CAB 823** 3" (76mm) dia., 50/box, 9 lbs. (4.1kg)
- CAB 824** 4" (102mm) dia., 50/box, 16 lbs. (7.3kg)
- CAB 825** 5" (127mm) dia., 25/box, 9 lbs. (4.1kg)
- CAB 826** 6" (152mm) dia., 25/box, 10 lbs. (4.5kg)
- CAB 828** 8" (203mm) dia., 25/box, 13 lbs. (5.9kg)

### **Bosserman Clip 1/2" (13mm) Lock**

- CAB 950** 1" (25mm) dia., 200/box, 13 lbs. (5.9kg)
- CAB 951** 2" (51mm) dia., 100/box, 13 lbs. (5.9kg)
- CAB 952** 3" (76mm) dia., 50/box, 9 lbs. (4.1kg)
- CAB 953** 4" (102mm) dia., 50/box, 16 lbs. (7.3kg)
- CAB 954** 5" (127mm) dia., 25/box, 9 lbs. (4.1kg)
- CAB 955** 6" (152mm) dia., 25/box, 10 lbs. (4.5kg)
- CAB 956** 8" (203mm) dia., 25/box, 13 lbs. (5.9kg)

Extra Long Styles available for running 2 cables separately from 1 messenger wire or large bundles of cables. For total corrosion resistance and insulation in above ground applications, use CAB Rings which are outlined on page 14.