

80W Flood / Area Light



NEW FLO4 Series

Sleek, streamlined design with premium performance

LM80
Tested Chips

Polyester
Powder Coat Finish
Bronze Standard

Highest Grade
Polycarbonate Optics

Type III Standard
Type V Available

Trunnion Mount Standard

Field-Interchangeable:
Slip Fitter, Pole, or Multi-Mount
Ordered Separately

Options available (ordered separately):

Pole Mount



FL04-PM

Multi Mount



FL04-MM

Slip Fit Mount



FL04-SF

Visor



FL04-SHIELD-SM

Motion Sensor or Photocell



FL04-MMS-KIT

FLPC-LV

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	10,947 lm
Efficacy	131.37 lm/W
CCT	4000K
CRI	73.5
Dimmable	0-10V
L70 Life	54,000
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLVGVMBFFVAS

ILLUMINANCE AT A DISTANCE

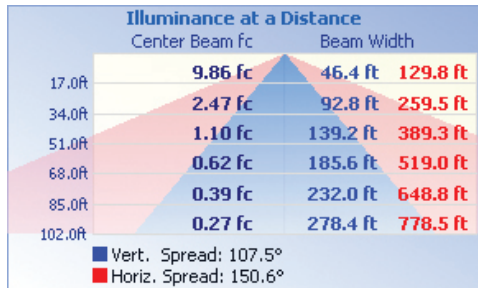

ELECTRICAL

Wattage	80W
Voltage	120-277V
Power factor	0.96
THD	12.71%
Operating temp	-40 to 40°C


CONSTRUCTION

Housing	Aluminum alloy
Finish	Polyester powder coat
Colour	Bronze
IP rating	IP65
EPA rating	45° - 1.13 ft² Horizontal - 0.8 ft² Vertical - 1.6 ft²
Weight	13.44 lbs
Carton qty	1

DIMENSIONS

58.5 * 38.5 * 16 cm

ISOCANDELA PLOT

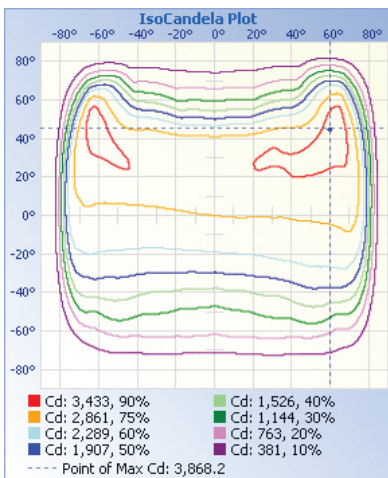

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com