

S611 Soft Starter

S611D242N3S

UPC:786685480367

Dimensions:

- **Height:** 20.83 IN
- **Length:** 8.37 IN
- **Width:** 11.58 IN

Weight:38 LB

Warranties:


- Eaton Selling Policy 25-000, one (1) year from the date of installation of the Product or eighteen (18) months from the date of shipment of the Product, whichever occurs first.

Specifications:

- **Circuit Breaker Type:** FDC
- **Fuse Size:** Class RK5/K5/J
- **Amperage Rating:** 242A
- **Frame Size:** Frame D
- **Frequency Rating:** 47-63 Hz
- **Full Load Current Range:** 120-242 FLA
- **Horsepower:** 200 hp
- **Mounting:** Vertical
- **Number Of Conductors:** 1
- **Number Of Slots:** 2
- **Operating Temperature:** -20° to 50°C
- **Operating Voltage:** 108-132V
- **Phase:** Three-phase
- **User Interface:** LCD
- **Voltage Rating:** 480V
- **Wire Size:** #22-12 AWG

Supporting documents:

- [Eaton's Volume 6-Solid-State Motor Control](#)
- [S611D AutoCAD 2D Footprint](#)
- [S611D 3D Model Xchange](#)
- [S611D 2D Drawing Xchange](#)

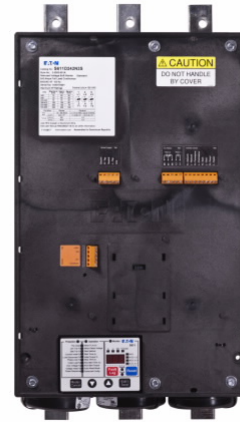

- [S611D AutoCAD 2D Footprint \(mm\)](#)
- [S611 Soft Starter Quick Start Installation Guide](#)
- [S611 Soft Starters](#)
- [Eaton Specification Sheet - S611D242N3S](#)

Certifications:

- IEC 60947-4-2
- UL Listed
- CSA file No. 3211-06
- IEC 60947-2
- UL 1077
- CSA Std. C22.2 No.235

Product compliance: No Data