

ORDERING INFORMATION

Order code: 58981
 Description: F4T5/DL/PH/G5/STD
 UPC: 69549589810
 Case quantity: 100




Nominal length : 6 in. (152 mm) Dia. : 5/8 in. (16 mm)

PERFORMANCE DATA


Shape: T5
 Base: G5 (Min Bipin)
 Starting method: Preheat Start (PH)
 Wattage (W): 4
 Colour temperature (K): 6 500
 CRI: 82
 Rated life on PS/PRS¹ ballast:
 Based on a 3 hour start 6 000
 Based on a 12 hour start 8 000
 Initial lumens (lm): 120
 Mean lumens (lm): 115
 Nominal efficiency (lm/W): 30
 TCLP compliant: Yes
 Phosphor composition: Triphosphor
 Nominal lamp operating frequency (Hz): 60
² Minimum starting temperature (°C): -10

DIMENSIONS

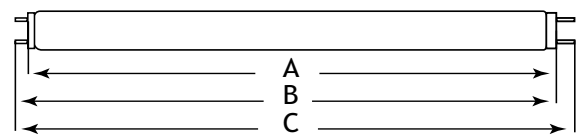

A Max	B Min / B Max	C Max
Base face to base face	Base face to end of opposite face pin	End of base pin to the end of opposite end
5.35 in.	5.53 in./5.62 in.	5.90 in.
135.9 mm	140.6 mm/143.0 mm	150.1 mm

SPECTRAL DISTRIBUTION

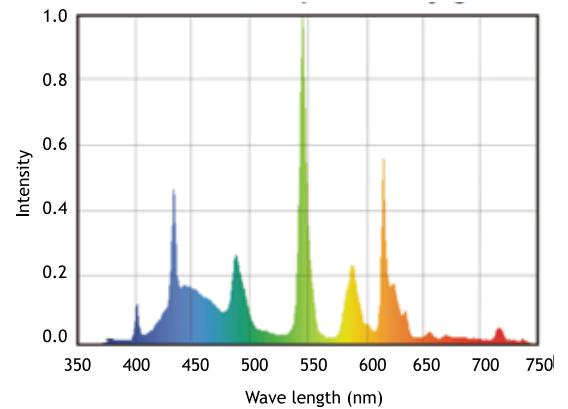

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T5 ballast.

