

## TAPCON® CONCRETE SCREWS VIS À BÉTON TAPCON®

**3000  
Series**

- Genuine Blue Climaseal® Coating.
- No Plugs.
- Just Drill and Drive.

- Ideal for concrete, brick or hollow block.
- Shear strength: 3/16" Dia. = 145 lbs, 1/4" Dia. = 285 lbs.
- Using the correct Tapcon® Bit, drill hole in masonry to depth of at least 1/4" deeper than installed screw.

**NOTE: DO NOT USE BIT TO DRILL STEEL FIXTURES.** Position Tapcon® through fixture and drive into pre-drilled hole until seated.

The Condrive® Installation Tool is available for repetitive installations.

### ORDER BY STOCK NUMBER

Standard Package: 100 Screws (Includes Tapcon® Drill Bit)


3/16 Diameter				1/4 Diameter			
Phillips Stock No.	Hex Stock No.	Size	Tapcon® Drill Size	Phillips Stock No.	Hex Stock No.	Size	Tapcon® Drill Size
3110	3010	3/16 x 1-1/4	5/32 x 3-1/2	3310	3210	1/4 x 1-1/4	3/16 x 3-1/2
3120	3020	3/16 x 1-3/4	5/32 x 3-1/2	3320	3220	1/4 x 1-3/4	3/16 x 3-1/2
3130	3030	3/16 x 2-1/4	5/32 x 4-1/2	3330	3230	1/4 x 2-1/4	3/16 x 4-1/2
3140	3040	3/16 x 2-3/4	5/32 x 4-1/2	3340	3240	1/4 x 2-3/4	3/16 x 4-1/2
3160	3060	3/16 x 3-1/4	5/32 x 5-1/2	3350	3250	1/4 x 3-1/4	3/16 x 5-1/2
				3370	3270	1/4 x 4	3/16 x 5-1/2

Tapcon®, Climaseal® and Condrive® are registered Trademarks of ITW Buildex

## CONDRIVE® INSTALLATION TOOL OUTIL CONDRIVE® D'INSTALLATION

**7000  
Series**

- For repetitive installation of Tapcon® Concrete Screws.
- The Condrive® 7000 is a multi- purpose installation tool that is inserted into a 3/8" or 1/2 inch chuck of a standard hammer or electric drill.
- The Condrive® 7000 Tool can be set up to drive either Hex or Phillips drive Tapcon® Screws.

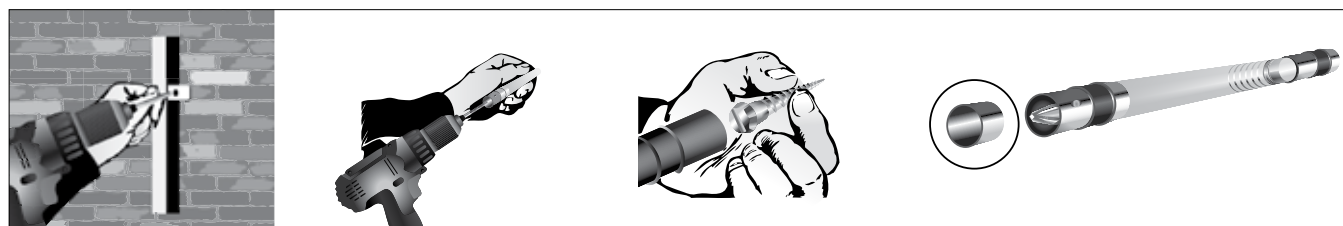

**1.** Insert drill adapter with drill bit into chuck of electric drill. Drill hole into masonry 1/4" deeper than installed screw.

**2.** Place Hex or Phillips driver bit into tool. Slide end of tool sleeve over drill bit and snap onto drill adaptor.

**3.** Insert head of Tapcon® Concrete Screw into Hex or Phillips driver bit. Install screw through fixture into pre-drilled hole until seated.