

LED 2x4 Panel



LED Flat Panel 2x4 50 Watt 5000 Lumens 4000K



Product Description

The 2x4 LED Panel light is constructed using an extruded aluminum frame with an attractive impact resistant acrylic lens that helps achieve a wide light distribution pattern. These Panel lights are ideal for use in offices, schools, healthcare, and many other commercial applications. Designed to easily replace 2x4 fluorescent fixtures in retrofit or new construction projects.

This 2x4 panel features 120/277V dual voltage operation and is equipped standard with a 0 - 10 Volt continuous dimming driver that works with any standard 0 - 10 Volt control/dimmer. The dimming range is 10% to 100%; varies by control device. The 4000K light and high 82+CRI provides a bright natural light solution. Hanger kits and surface mount kits available (see below).

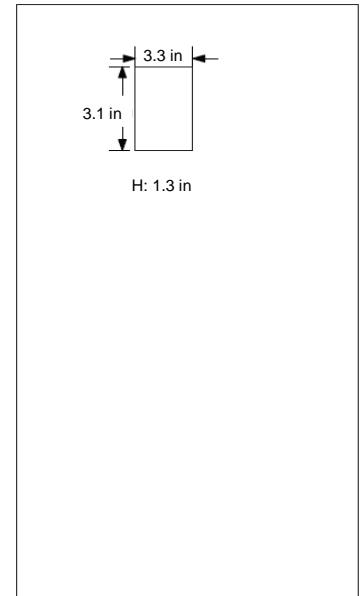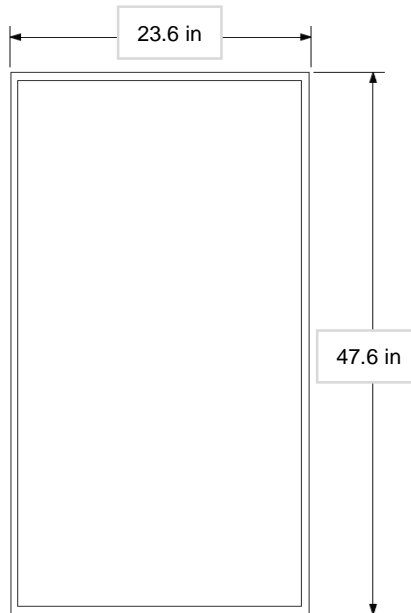

Electrical	
Watt	50
Voltage	120-277V
Min. Start Temperature	-40°C
Max. Operating Temperature	40°C
Driver Type	Class2
Driver Output	27-42V Direct Current
Dimming	0 – 10 Volt

Light	
Initial Lumens	5000
Lumens per Watt	100
Color Temperature	4000K
Color Rendering (CRI)	80
Beam Angle	150°

Agency Approvals	
DLC	Yes
FCC	Yes
ETL	Yes

Product Details	
Housing Material	Extruded Aluminum
Lens Material	Acrylic
Warranty	5 years, 10 year limited
Rated Life	50,000 hours

Order Code: 10858

UPC: 840791108581

DLC Product ID: PLXZ8W37NLD9

Model: L4FP2X45040D

Accessories (Ordered Separately)

- Surface Mount Kits 2x4 – Order Code: 10460
- Wire Hanger Kit 2x4 - Order Code: 10466