

THE QUALITY DIFFERENCE.
 Avery Dennison sets the toughest standards in the industry. Continuously monitored through statistical process control (SPC), Cable Ties meet all appropriate qualifications for Military Specifications and UL. As a result we have earned several quality awards such as Ford* Q1 and Self Certification at Chrysler*.

** Ford is a registered trademark of the Ford Motor Company. Chrysler is a registered trademark of the Chrysler Corporation.*

EVERY DENNISON™ CABLE TIES are made with type 6/6 nylon for high impact and tensile strength.

They are self-extinguishing – UL 94 Flam. class V2 and non-corrosive.

Operating temperatures from -40°F to 185°F (-40°C to 85°C).

Weather resistant from -40°F to 176°F (-40°C to 80°C).


Heat stabilized from -40°F to 221°F (-40°C to 105°C).



Length: 4" / 101.6mm, width: .095" / 2.41mm, thickness: .041" / 1.04mm

4" (101.6 mm) MINIATURE


PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
08432	NATURAL	4" / 101.6MM	1/16"-7/8" / 1.59MM-22.23MM	18 LBS. / 8.17KG	MS-3367-4-9	1,000/BAG	25M
08434	NATURAL				MS-3367-4-9	100/BAG	5M
08433	BLACK WEATHER RESISTANT				MS-3367-4-0	1,000/BAG	25M
08435	BLACK WEATHER RESISTANT				MS-3367-4-0	100/BAG	5M
08404	BLACK HEAT STABILIZED					1,000/BAG	25M
08508	RED				MS-3367-4-2	1,000/BAG	10M
08582	ORANGE				MS-3367-4-3	1,000/BAG	10M
08583	YELLOW				MS-3367-4-4	1,000/BAG	10M
08584	GREEN				MS-3367-4-5	1,000/BAG	10M
08587	BLUE				MS-3367-4-6	1,000/BAG	10M



Length: 5.5" / 139.7mm, width: .130" / 3.30mm, thickness: .048" / 1.22mm

5.5" (139.7 mm) INTERMEDIATE


PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
08376	NATURAL	5.5" / 139.7MM	1/16"-1-1/4" / 1.59MM-31.75MM	40 LBS. / 18.14KG	MS-3367-5-9	1,000/BAG	5M
08383	NATURAL				MS-3367-5-9	100/BAG	5M
08431	BLACK WEATHER RESISTANT				MS-3367-5-0	1,000/BAG	5M
08384	BLACK WEATHER RESISTANT				MS-3367-5-0	100/BAG	5M
08400	BLACK HEAT STABILIZED					1,000/BAG	5M



Length: 8" / 203.2mm, width: .130" / 3.30mm, thickness: .054" / 1.37mm

8" (203.2 mm) INTERMEDIATE


PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
08377	NATURAL	8" / 203.2mm	1/16"-2-1/8" / 1.59mm-53.98mm	40 LBS. / 18.14kg	MS-3367-5-9	1,000/BAG	5M
08385	NATURAL				MS-3367-5-9	100/BAG	5M
08380	BLACK WEATHER RESISTANT				MS-3367-5-0	1,000/BAG	5M
08386	BLACK WEATHER RESISTANT				MS-3367-5-0	100/BAG	5M
08401	BLACK HEAT STABILIZED					1,000/BAG	5M
08690	RED				MS-3367-5-2	1,000/BAG	5M
08671	BLUE				MS-3367-5-6	1,000/BAG	5M
08782	YELLOW				MS-3367-5-4	1,000/BAG	5M
08664	GREEN				MS-3367-5-5	1,000/BAG	5M



Length: 7.5" / 190.5mm, width: .177" / 4.50mm, thickness: .050" / 1.27mm

7.5" (190.5 mm) STANDARD


PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
08387	NATURAL	7.5" / 190.5mm	1/16"-1-3/4" / 1.59mm-44.45mm	50 LBS. / 22.68kg	MS-3367-1-9	1000/BAG	5M
08436	NATURAL				MS-3367-1-9	100/BAG	5M
08388	BLACK WEATHER RESISTANT				MS-3367-1-0	1000/BAG	5M
08437	BLACK WEATHER RESISTANT				MS-3367-1-0	100/BAG	5M
08402	BLACK HEAT STABILIZED					1000/BAG	5M



Length: 11" / 279.4mm, width: .177" / 4.50mm, thickness: .053" / 1.35mm

11" (279.4 mm) STANDARD

PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
08600	NATURAL	11" / 279.4mm	1/16"-3" / 1.59mm-76.2mm	50 LBS. / 22.68kg	MS-3367-7-9	1000/BAG	5M
08859	NATURAL				MS-3367-7-9	100/BAG	5M
08286	BLACK WEATHER RESISTANT				MS-3367-7-0	1000/BAG	5M
08930	BLACK WEATHER RESISTANT				MS-3367-7-0	100/BAG	5M
08056	BLACK HEAT STABILIZED					1000/BAG	5M



Length: 15" / 381mm, width: .177" / 4.50mm, thickness: .053" / 1.35mm


15" (381 mm) STANDARD

PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
10036	NATURAL	15" / 381mm	1/16"-4" / 1.59mm-101.6mm	50 LBS. / 22.68kg	MS-3367-2-9	500/BAG	5M
08427	NATURAL				MS-3367-2-9	100/BAG	1M
10037	BLACK WEATHER RESISTANT				MS-3367-2-0	500/BAG	5M
08428	BLACK WEATHER RESISTANT				MS-3367-2-0	100/BAG	1M
10408	BLACK HEAT STABILIZED					500/BAG	5M
08416	BLACK HEAT STABILIZED					100/BAG	1M



INNOVATIVE PRODUCTS.

The Fastener Division entered the cable tie market over 25 years ago by developing innovative products through our unique stretching process. Some of the unique products we have developed over the years include Super Bar-Lok®, Ladder Tie, and Secur-A-Tie®.

CHANCES ARE, WE HAVE A CABLE TIE FOR YOUR APPLICATION. Avery Dennison™ Cable Ties are available in sizes from 4" (101.6mm) to 34" (863.6mm) and in three different materials. With tensile strength ratings up to 175 lbs. (79kg) and a wide variety of accessory ties, cable tie mounts, and installation tools, we have the product to serve your needs.

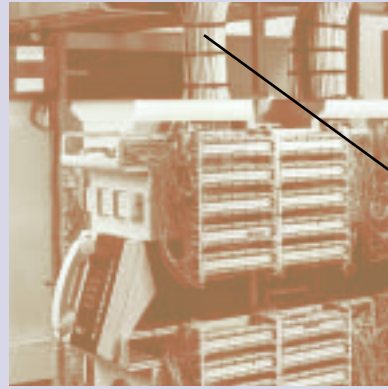

Heavy-Duty ties are used for bundles up to 10" (254mm) in diameter.



Length: 14.5" / 368.3mm, width: .251" / 6.38mm, thickness: .074" / 1.88mm

14.5" (368.3 mm) HEAVY DUTY


PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
10038	NATURAL	14.5" / 368.3mm	3/16"-4" / 4.76mm-101.6mm	120 LBS. / 54.43kg	MS-3367-3-9	100/BAG	1M
08378	NATURAL				MS-3367-3-9	50/BAG	1M
10039	BLACK WEATHER RESISTANT				MS-3367-3-0	100/BAG	1M
08382	BLACK WEATHER RESISTANT				MS-3367-3-0	50/BAG	1M
08403	BLACK HEAT STABILIZED					100/BAG	1M



Length: 21" / 533.4mm, width: .303" / 7.70mm, thickness: .075" / 1.91mm

21" (533.4 mm) HEAVY DUTY


PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
10606	NATURAL	21" / 533.4mm	1/4"-6" / 4.76mm-152.4mm	120 LBS. / 54.43kg	MS-3367-3-9	50/BAG	1M
10608	BLACK WEATHER RESISTANT				MS-3367-3-0	50/BAG	1M
10607	BLACK HEAT STABILIZED					50/BAG	1M



Length: 24" / 609.6mm, width: .303" / 7.70mm, thickness: .075" / 1.91mm

24" (609.6 mm) HEAVY DUTY


PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
10612	NATURAL	24" / 609.6mm	1/4"-7" / 4.76mm-177.8mm	120 LBS. / 54.43kg	MS-3367-3-9	50/BAG	1M
10614	BLACK WEATHER RESISTANT				MS-3367-3-0	50/BAG	1M
10613	BLACK HEAT STABILIZED					50/BAG	1M



Length: 28" / 711.2mm, width: .303" / 7.70mm, thickness: .075" / 1.91mm

28" (711.2 mm) HEAVY DUTY

PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
10618	NATURAL	28" / 711.2mm	1/4"-8" / 4.762mm-203.2mm	120 LBS. / 54.43kg	MS-3367-6-9	50/BAG	1M
10620	BLACK WEATHER RESISTANT				MS-3367-6-0	50/BAG	1M
10619	BLACK HEAT STABILIZED					50/BAG	1M



Length: 34" / 863.6mm, width: .350" / 8.89mm, thickness: .086" / 2.18mm

34" (863.6 mm) EXTRA HEAVY DUTY

PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
10049	NATURAL	34" / 863.6mm	1/4"-10" / 4.76mm-254mm	175 LBS. / 79kg		50/BAG	500
10050	BLACK WEATHER RESISTANT					50/BAG	500

Avery Dennison has a network of fully trained distributors. There is one in your area who can answer your questions or quickly deliver the parts you need. For additional information or to help identify your needs, call a distributor today or call us and we will refer you to one.