



Luminaire Flood light



Project: _____

Location: _____

Cat.No: _____

Type: _____

Lamps: _____ Qty: _____

Notes: _____

Product offering


UPC Code	Catalog Code	Description	Case Qty. (pc/carton)	Pallet Qty. (pc/pallet)
190096130726	FL10W40K1	10W, 850 LUMENS, 4000K, 120VAC INPUT, BLACK FINISH	24	2016
190096130740	FL30W40K1	30W, 2550 LUMENS, 4000K, 120VAC INPUT, BLACK FINISH	16	800
190096130757	FL50W40K1	50W, 4250 LUMENS, 4000K, 120VAC INPUT, BLACK FINISH	8	480
190096130764	FL70W40K1	70W, 5950 LUMENS, 4000K, 120VAC INPUT, BLACK FINISH	8	320

Technical specifications

Nominal power	10W, 30W, 50W, 70W
Nominal lumens	850, 2550, 4250, 5950 lumens
Input voltage	120VAC
CCT	4000K
CRI	80
Beam spread	Symmetrical wide beam 120°
Power connection	3-wire flexible cable (FL10/FL30/FL50 with 0.3 meter flexible cable length, FL70 with 0.5 meter flexible cable length)
Material and finishing	Die-cast aluminum housing with textured black finish, textured tempered glass lens
Mounting	Yoke


Weights	FL10: 0.28 lbs FL30: 0.56 lbs FL50: 0.79 lbs FL70: 1.23 lbs
Operating temperature range	-40°C to +40°C
Safety class	I
IP/IK rating	IP65 / IK06
Compliance	cETLus
Warranty	3-year limited warranty



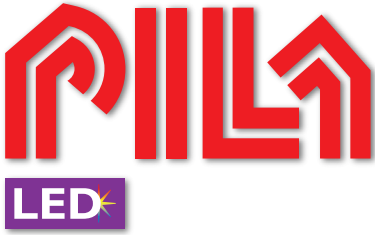


Dimensions


10W

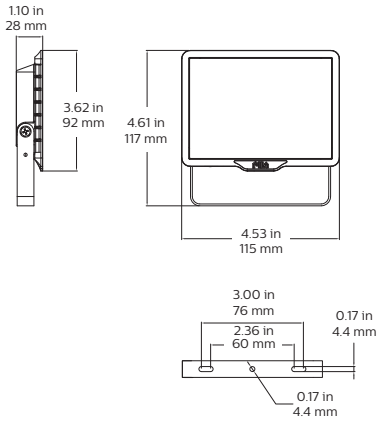

30W

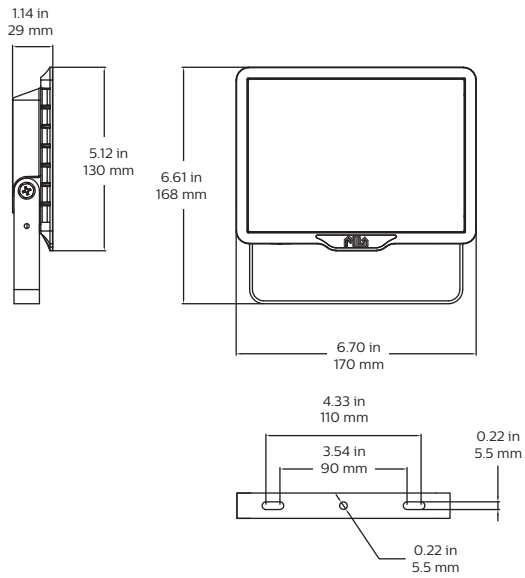

50W

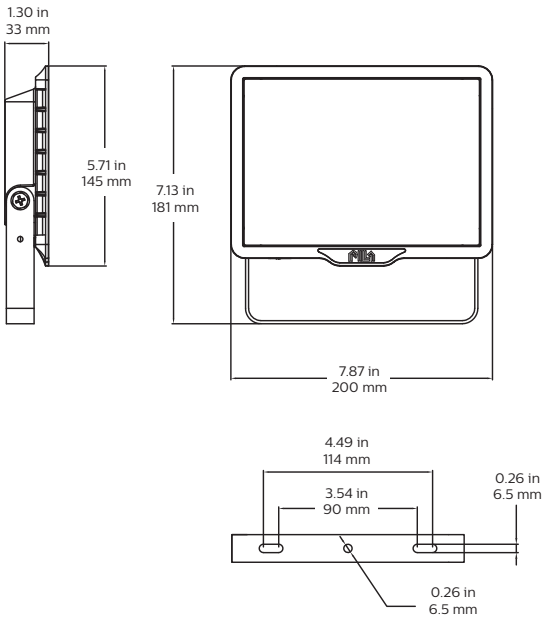

70W

