



CorePro LEDtube InstantFit T8

17T8 PRO LED/48-3500 BB G 1PK 10/1

The CorePro LED Type A - Ballast Driven InstantFit TLED is a great LED solution suitable for replacing T8 fluorescent lamps, using the existing ballast. The InstantFit (Type A) lamps can also be used with Philips TLED drivers for Type C applications.

Product data

General Information		Power Factor (Nom)		0.9
Base	G13 [Medium Bi-Pin Fluorescent]	Voltage (Nom)		120-277 V
Nominal Lifetime (Nom)	50000 h	Temperature		
Switching Cycle	50000X	T-Ambient (Max)		45 °C
B50L70	50000 h	T-Ambient (Min)		-20 °C
Light Technical		T-Storage (Max)		65 °C
Color Code	835 [CCT of 3500K]	T-Storage (Min)		-40 °C
Initial lumen (Nom)	2000 lm	T-Case Maximum (Nom)		55 °C
Luminous Flux (Rated) (Nom)	2000 lm	Controls and Dimming		
Correlated Color Temperature (Nom)	3500 K	Dimmable		No
Color Consistency	<6	Mechanical and Housing		
Color Rendering Index (Nom)	80	Product Length		1200 mm
LLMF At End Of Nominal Lifetime (Nom)	70 %	Approval and Application		
Operating and Electrical		Energy Saving Product		Yes
Input Frequency	50 to 60 Hz	Approbation Marks		UL certificate RoHS compliance
Power (Rated) (Nom)	17 W			
Lamp Current (Nom)	146 mA			
Starting Time (Nom)	1 s			
Warm Up Time to 60% Light (Nom)	1 s			


CorePro LEDtube InstantFit T8

Product Data

Order product name	17T8 PRO LED/48-3500 BB G 1PK 10/1
EAN/UPC - Product	046677471750
Order code	471755
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10

Material Nr. (12NC)	929001363204
Net Weight (Piece)	0.215 kg
Model Number	9290013632


Dimensional drawing

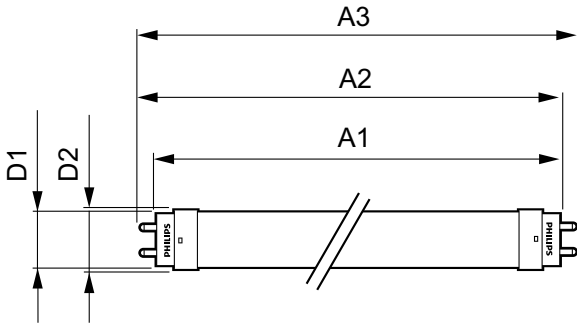


TLED IF CorePro 4ft 2000lm 3500K

Product	D1	D2	A1	A2	A3
17T8 PRO LED/48-3500 BB G 1PK 10/1	25.7 mm	26 mm	1200 mm	1207 mm	1214 mm

Photometric data




General Uniform Lighting



Mains DLC 17W 2000-2100lm 3000_5000K ND



Mains DLC 120-277V 17W 2000lm 3500K ND

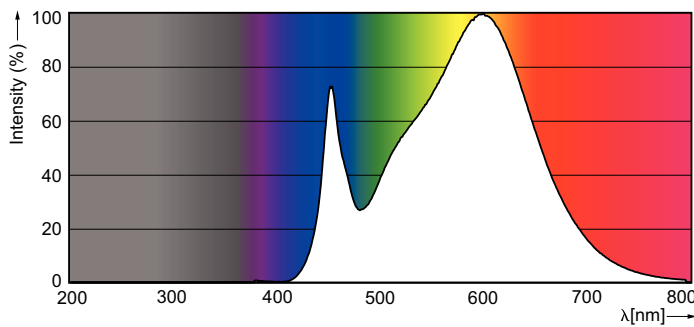

LED InstantFit PL-C/T 100mm 10.5 W /835



CorePro LEDtube InstantFit T8

Lifetime

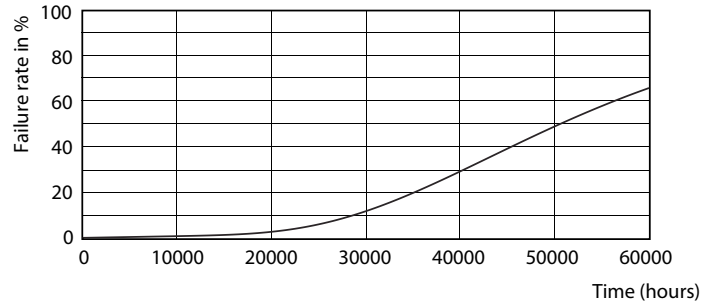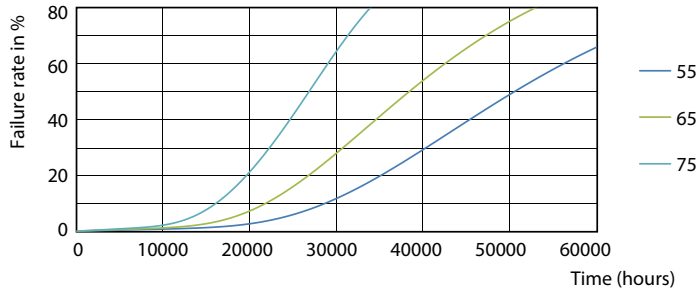


Mains DLC 17W 2000-2100lm 3000_5000K ND

Mains DLC 17W 2000-2100lm 3000_5000K ND

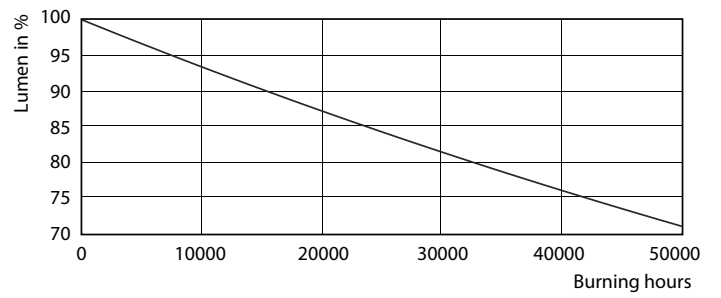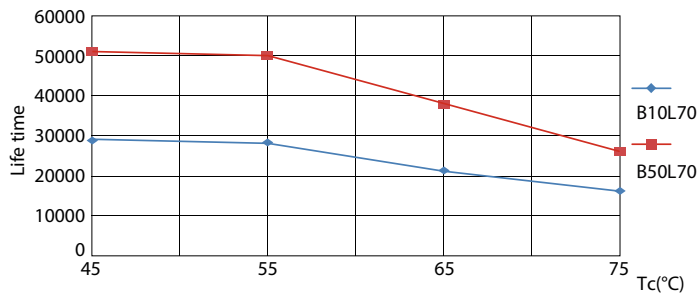

Mains DLC 17W 2000-2100lm 3000_5000K ND

Mains DLC 17W 2000-2100lm 3000 5000K ND

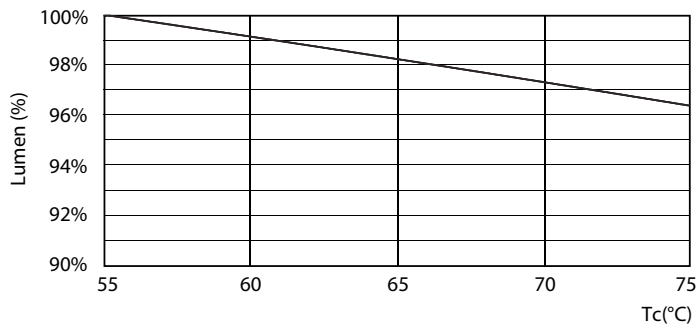

Mains DLC 17W 2000-2100lm 3000 5000K ND

CorePro LEDtube InstantFit T8

