

CorePro LEDtube InstantFit T8

17T8 PRO LED/48-5000 BB G 1PK 10/1

The CorePro LED Type A - Ballast Driven InstantFit TLED is a great LED solution suitable for replacing T8 fluorescent lamps, using the existing ballast. The InstantFit (Type A) lamps can also be used with Philips TLED drivers for Type C applications.

Product data

General Information		Power Factor (Nom)		0.9
Base	G13 [Medium Bi-Pin Fluorescent]	Voltage (Nom)	120-277 V	
Nominal Lifetime (Nom)	50000 h	Temperature		
Switching Cycle	50000X	T-Ambient (Max)	45 °C	
B50L70	50000 h	T-Ambient (Min)	-20 °C	
Light Technical		T-Storage (Max)	65 °C	
Color Code	850 [CCT of 5000K]	T-Storage (Min)	-40 °C	
Initial lumen (Nom)	2100 lm	T-Case Maximum (Nom)	55 °C	
Luminous Flux (Rated) (Nom)	2100 lm	Controls and Dimming		
Correlated Color Temperature (Nom)	5000 K	Dimmable	No	
Color Consistency	<6	Mechanical and Housing		
Color Rendering Index (Nom)	80	Product Length	1200 mm	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Approval and Application		
Operating and Electrical		Energy Saving Product	Yes	
Input Frequency	50 to 60 Hz	Approbation Marks	UL certificate RoHS compliance	
Power (Rated) (Nom)	17 W			
Lamp Current (Nom)	146 mA			
Starting Time (Nom)	1 s			
Warm Up Time to 60% Light (Nom)	1 s			


CorePro LEDtube InstantFit T8

Product Data

Order product name	17T8 PRO LED/48-5000 BB G 1PK 10/1
EAN/UPC - Product	046677471774
Order code	471771
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10

Material Nr. (12NC)	929001363404
Net Weight (Piece)	0.215 kg
Model Number	9290013634


Dimensional drawing

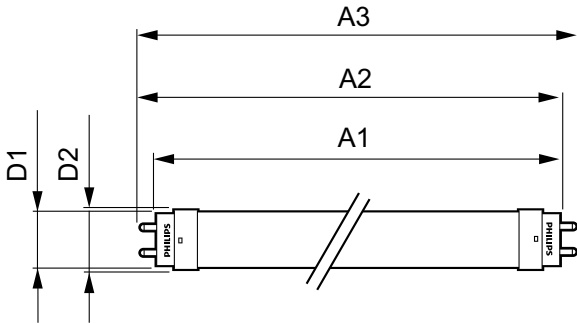


TLED IF CorePro 4ft 2100lm 5000K

Product	D1	D2	A1	A2	A3
17T8 PRO LED/48-5000 BB G 1PK 10/1	25.7 mm	26 mm	1200 mm	1207 mm	1214 mm

Photometric data




General Uniform Lighting

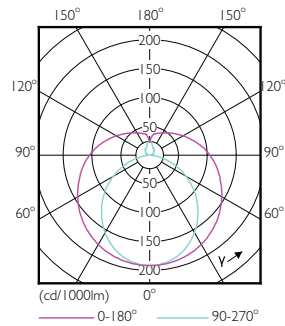

Mains DLC 17W 2000-2100lm 3000_5000K ND



Mains DLC 120-277V 17W 2100lm 5000K ND

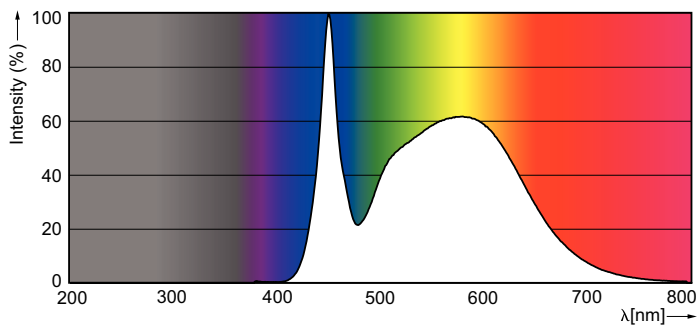

LEDtube 1200mm 12W G13/850



CorePro LEDtube InstantFit T8

Lifetime

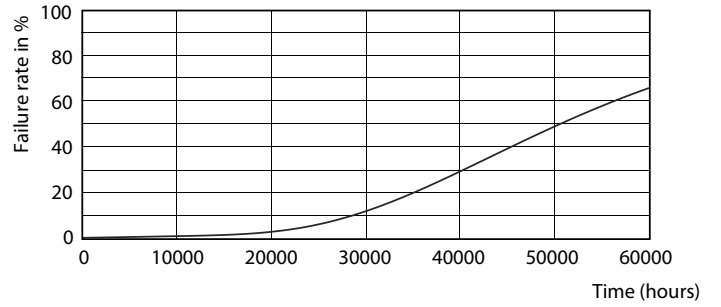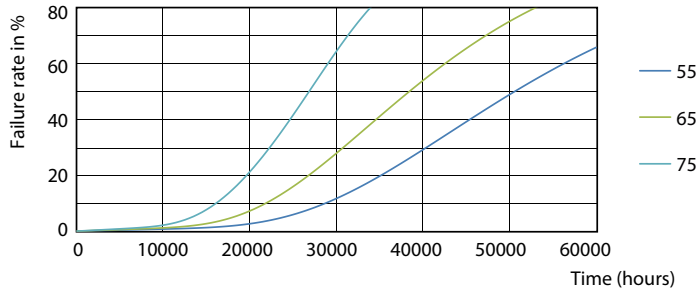


Mains DLC 17W 2000-2100lm 3000_5000K ND

Mains DLC 17W 2000-2100lm 3000_5000K ND

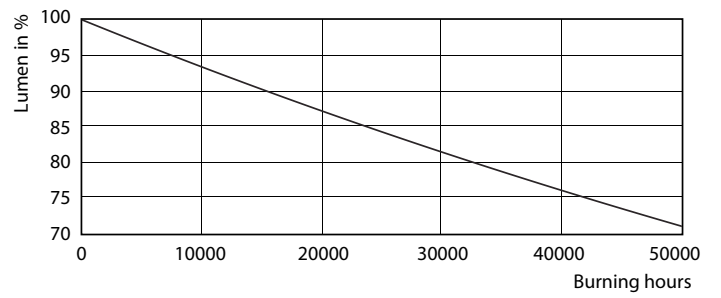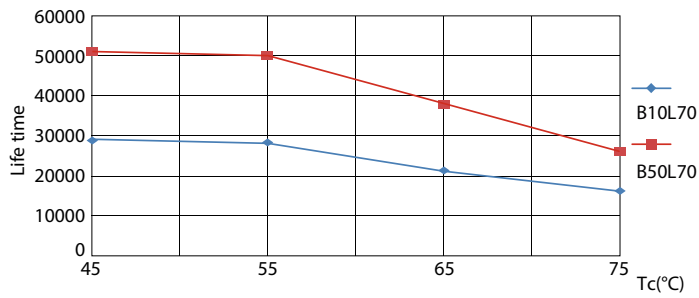

Mains DLC 17W 2000-2100lm 3000_5000K ND

Mains DLC 17W 2000-2100lm 3000 5000K ND

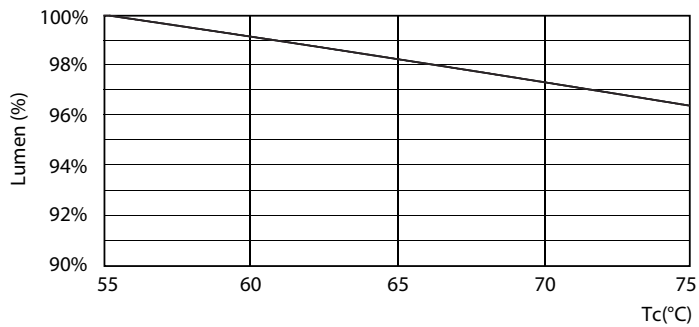

Mains DLC 17W 2000-2100lm 3000 5000K ND

CorePro LEDtube InstantFit T8

