



# DVAKSX-LED14

Ceiling Mount LED Vapourproof



## SPECIFICATIONS\*

Watts	14W
Lumens	1585
Efficacy	111
Replaces Up To	100W Incandescent / 36W CFL Vapourproof fixture
Colour Temp	5000K*, 4000K, 3000K
Certification	ETL, DLC
Operating Temp	-40°C to 40°C
Voltage	120-277V
LED Life	50,000 hours
Housing Material	Aluminum
Lens Material	Polycarbonate
Power Factor	0.991
CRI	84
THD	10.8%

\*Standard



## DESCRIPTION

The DVAKSX-LED14 is a versatile fixture that can be used in industrial and architectural applications. The fixture is available in custom colours and has a variety of globe and guard accessories. Not for use in hazardous locations.

## APPLICATIONS



Entrances



Stairwells



Tunnels



Service Areas



Restaurants



Elevator  
Shafts

## FEATURES

- Sleek, modern look with the same ruggedness as the original DVAKS fixture.
- 10 minute retrofit. Retrofits to existing 4" round/octagon boxes.
- Polycarbonate lens can be easily replaced with glass globe and guard to provide a different look.
- Precision die cast aluminum housing with powder coat paint finish for industrial and architectural applications.
- Grey polyester powder coat paint finish for protection against oxidation.

## ACCESSORIES

RAB Design carries a diverse line of durable and cost efficient glass globes. They come in various finishes, which include impregnated colours.

### GLASS GLOBES OPTIONS (SOLD SEPARATELY)



GL100  
CLEAR GLASS



GL100HR  
HEAT RESISTANT



GL100RIB  
RIBBED GLASS



GL100SB  
SANDBLASTED



RGL100A  
AMBER



RGL100B  
BLUE



RGL100G  
GREEN



RGL100R  
RED

### GD100CGS CAST GUARD (SOLD SEPARATELY)




#### FEATURES

- Heavy duty raw/painted cast guard for use with RAB Design Vapourproof fixtures.
- Machined threads for smooth fit to RAB Design fixtures.
- Set screw to lock guard securely to fixture.



DVAKSX-LED14 shown with GD100CGS Cast Guard and GL100SB Sandblasted Globe.

## DIMENSIONS

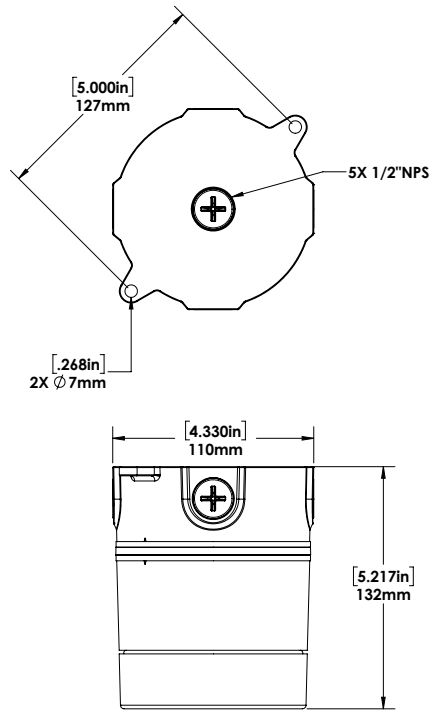

## MOUNTING OPTIONS

This fixture series is also available in **wall mount** or **pendant mount**.



**Wall Mount**

[See DVBSX-LED14 Spec Sheet](#)



**Pendant Mount**

[See DVCSX-LED14 Spec Sheet](#)

## ORDERING GUIDE

DVAKSX	LED14				
WATTS	VOLTAGE	COLOUR TEMP.	FINISH	FR	
	B - 120 - 277V	5K - 5000K*	DGY - DOVE GREY*	FR - FROSTED LENS*	
		4K - 4000K	CC - CUSTOM		
		3K - 3000K			

\*Standard Configuration

## FIELD INSTALLED ACCESSORIES:

CHECK THE ACCESSORIES YOU WISH TO ORDER:



Cast Guard - Raw  
Finish GD100CGS



Cast Guard - Dove Grey  
Finish GD100CGS-DGY



GL100  
Clear Glass



GL100HR  
Heat Resistant



GL100RIB  
Ribbed Glass



GL100SB  
Sandblasted



RGL100A  
Amber



RGL100B  
Blue



RGL100G  
Green



RGL100R  
Red