


BEST VISIBILITY

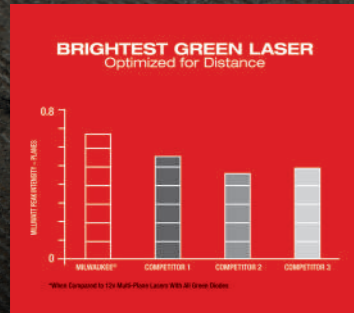

HIGH-INTENSITY GREEN LASER UP TO 38M WORKING RANGE(RADIUS)

FAST, VERSATILE SETUP

**MICRO CONTROL: PROVIDES FASTER ALIGNMENT & SET UP
PIVOTS ON POINT: IMPROVED ACCURACY & EASY ALIGNMENT**

ALL DAY RUN TIME

ONE M12 CP3.0 BATTERY PACK = 15+ HOURS OF RUN-TIME

M12 CROSS LINE AND PLUMB POINT LASER LEVEL

Voltage (VDC)	12
Working range (m)	38
Levelling accuracy (mm/m)	0.3
Self-levelling range	±4°
Laser class	2
Ingress Protection	IP54
Weight w/ 2Ah battery pack (kg)	1.2



M12 CLLP

M12 3-PLANE LASER LEVEL

Voltage (VDC)	12
Working range (m)	38
Levelling accuracy (mm/m)	0.3
Self-levelling range	±4°
Laser class	2
Ingress Protection	IP54
Weight w/ 4Ah battery pack (kg)	1.66



M12 3PL

M12 LASER DETECTOR

Working range (m)	50
Measuring Accuracy Fine (mm/m)	+/- 0.08
Measuring Accuracy Coarse (mm/m)	+/- 0.1
Battery type	LR6 x 2
Weight w/ battery (kg)	0.28



LLD50

LASER LEVEL ACCESSORIES

48-35-1311	360 LASER MOUNT
48-35-1313	TRACK CLIP
48-35-1111	LASER TARGET BOARD
48-35-1411	TRIPOD



48-35-1311



48-35-1313



48-35-1111

