

## Individual Spec Sheet

# A19-CHOICE

## LED LAMP

### ORDERING INFORMATION

**Order code:** 68595  
**Model number:** A19/S3/9.5W/50K/ND/CHOICE/STD 4P  
**UPC:** 069549017634  
**Case quantity:** 12 x 4 pack

### PHYSICAL DATA

**Shape:** A19 4 pack  
**Base:** E26

### PERFORMANCE DATA

**Watts (W):** 9.5  
**Volts (VAC):** 120  
**Colour temperature (K)<sup>1</sup>:** 5 000  
**Average life (L70 hours)<sup>2</sup>:** 15 000  
**Lumen output (lm)<sup>3</sup>:** 909  
**Initial lumens per watt (lm/W):** 96  
**CRI:** 85  
**Beam angle:** 220  
**Power factor:** 0.6  
**Operating temperature range:** -20 °C to 45 °C (-4 °F to 113 °F)

<sup>1</sup> Typical colour temperature range: +/- 5 %

<sup>2</sup> Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

<sup>3</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

### CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electrical shock – do not use where directly exposed to water or weather.
- Suitable for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Do not use with dimmers.
- For complete warranty information visit [www.standardpro.com](http://www.standardpro.com).
- 3 Years Limited Warranty.



**3**<sup>yrs</sup>  
**warranty**

  
**non  
dimmable**

  
**damp  
location**

  
**ICES  
005**


**FC**

**cULUS**

  
**ENERGY STAR**

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.  
Data is based upon tests performed in a controlled environment.  
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

**DIMENSIONS**

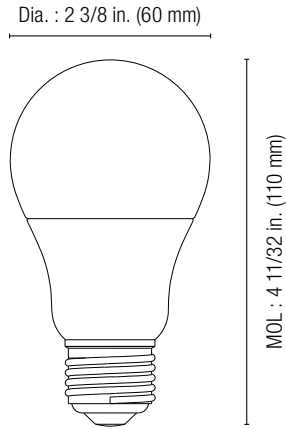

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.  
 All products are subject to change or may be discontinued any time without notice.