

Commercial Combination Devices

Single Pole Switch with Second Device



INDUSTRIAL
COMMERCIAL
RESIDENTIAL

D-14 SWITCHES

Commercial Combination Devices

FEATURES

- Grounding terminal screw standard.
- Combination switch with additional switch has 120/277 rating ideal for fluorescent lighting fixtures typical in commercial applications.
- Receptacles have triple wipe line contacts and double wipe ground contacts to insure long-term plug retention.
- 0.050"(1.27mm) thick steel mounting strap zinc-plated for corrosion resistance.
- Break-off provision for wiring both devices on same circuit or on separate circuits.
- Terminal screws backed out – ready for wiring.
- Side wire terminals accept up to #10 solid or stranded wire.
- Pilot light may be wired to indicate power “on” or power “off”.
- Combination switch with receptacle Catalog No. 274 and 291 feature neon pilot light standard.
- Combination slot/Phillips head mounting and terminal screws ease installation. (slot/Robertson screws in Canada where available).

Single Pole Switch with Receptacle – Side Wire


Switch Rating	Receptacle Rating	Second Device Description	Color	Catalog No.
15A 120V/AC	15A 125V/AC	2P3W Grounding Receptacle	Almond	274A
			Brown	274B
			Ivory	274V
			Light Almond	274LA
			White	274W
20A 120/277V/AC	20A 125V/AC	2P3W Grounding Receptacle	Brown	291B
			Ivory	291V
			White	291W

Single Pole Switch with Additional Switch – Side Wire


Rating A	V/AC	Second Device Description	Color	Catalog No.
15	120/277	Single Pole Switch	Almond	271A
			Brown	271B
			Ivory	271V
			Light Almond	271LA
			White	271W
15	120/277	3-Way Switch	Almond	275A
			Brown	275B
			Ivory	275V
			Light Almond	275LA
			White	275W

Single Pole Switch with Pilot Light – Side Wire


Switch Rating	Pilot Light Rating	Color	Catalog No.
15A 120V/AC	1/25W 120V/AC	Almond	277A
		Brown	277B
		Ivory	277V
		Light Almond	277LA
		White	277W

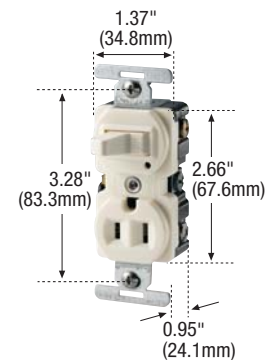

274



271

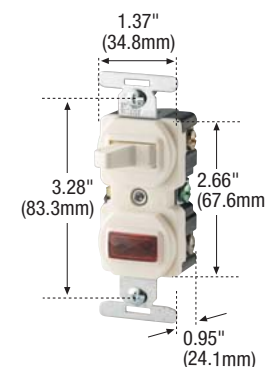

277

TESTING & CODE COMPLIANCE

- UL 20 Listed, (file no. E18704)
- For Switches: CSA (file no. 10016 (6241-05))
- For Switches w/Recep.: CSA (file no. 6914 (6233-04)).

Meets all CSA requirements, C22.2 no. 111 for switches, C22.2 no. 42 for receptacles.

MATERIAL CHARACTERISTICS

Temperature Rating:
-40°C to 65°C.