

# CP02 Canopy Light



35W, 45W, 65W, 75W Selectable | 4000K | 120-277V

Ideal for parking structures, pool areas, gas stations, walkways, warehouses, barns, canopies and more. Suitable for damp/wet locations or wherever a high impact-resistant fixture is required

DIP Switch Allows for the Easy Selection of Desired Wattage  
35W/45W/65W/75W

Hinged Mounting Plate for Quick Installation

4kV Surge Protection  
10kV option available



Dropped Lens for Improved Beam Angle

Faceted Polycarbonate Lens for Superior Glare Control, Fire and Vandal Resistance

White Powder Coat Finish

## TECHNICAL DATA



### LIGHT SPECIFICATIONS


Lumens	9,750 lm @ 75W
Efficacy	130 lm/W
CCT	4000K
CRI	>80
L70 Life	50,000 hrs
Warranty	5-year
Beam Angle	140°
Dimmable	0-10V

### APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PV306PYM


### ILLUMINANCE AT A DISTANCE

Note: Plotted @ 75W

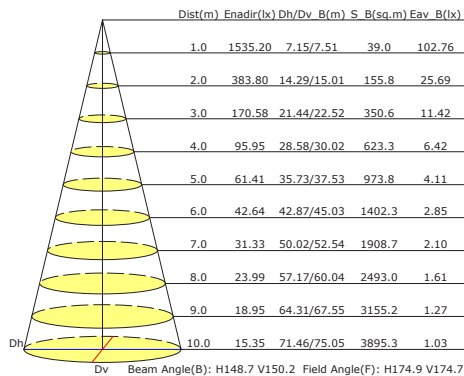

### ISOCANDELA

Note: Plotted @ 75W

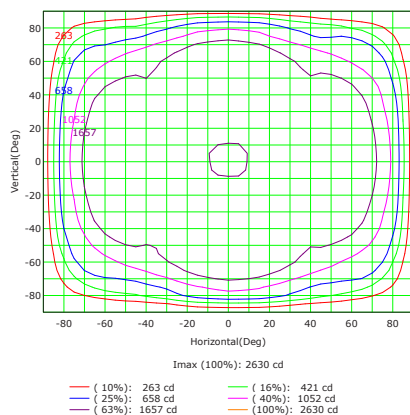


### ELECTRICAL

Wattage	35W / 45W / 65W / 75W
Voltage	120-277V
Power Factor	>0.9
THD	15%
Operating Temp	-40 to 40°C

### CONSTRUCTION

Housing	Aluminum Alloy
Finish	White
IP Rating	IP65
Carton Qty	4
Carton Dimensions	395 x 270 x 275 mm

### DIMENSIONS

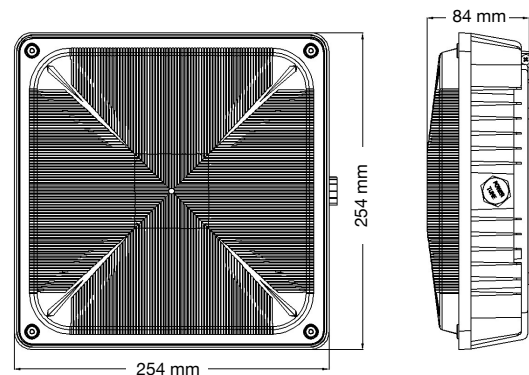

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | [ordersbc@csc-led.com](mailto:ordersbc@csc-led.com)