


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



PANDUIT PART NUMBER	MAIN - AWG [mm]			TAP - AWG [mm]	PANDUIT COLOR CODE	PANDUIT DIE INDEX NO.	STD. PKG QTY.
	COPPER CABLE	GROUND ROD	REBAR	COPPER CABLE			
GCE1/0-1/0	#6 SOL - 1/0 STR [16-50 SQ mm]	N/A	N/A	#6 SOL - 1/0 STR [16-50 SQ mm]	RED	PG10	1
GCE250-1/0	#1/0 STR - 250 kcmil [70-120 SQ mm]	1/2"-5/8" ROD [12.7-15.9 mm]	3/8" - 1/2"; #3-#4 REBAR [9.5-12.7mm; #10M-#13M REBAR]	#6 SOL - 1/0 STR [16-50 SQ mm]	BLACK	PG25	
GCE250-250	#1/0 STR - 250 kcmil [70-120 SQ mm]	1/2"-5/8" ROD [12.7-15.9 mm]	3/8" - 1/2"; #3-#4 REBAR [9.5-12.7mm; #10M-#13M REBAR]	#1/0 STR - 250 kcmil [70-120 SQ mm]	BLACK	PG25	
GCE500-1/0	250 kcmil - 500 kcmil [150-240 SQ mm]	1/2"-3/4" ROD [12.7-19.1 mm]	5/8" - 3/4"; #5-#6 REBAR [15.9-19.1mm; #16M-#19M REBAR]	#6 SOL - 1/0 STR [16-50 SQ mm]	BLUE	PG50	
GCE500-250	250 kcmil - 500 kcmil [150-240 SQ mm]	1/2"-3/4" ROD [12.7-19.1 mm]	5/8" - 3/4"; #5-#6 REBAR [15.9-19.1mm; #16M-#19M REBAR]	#1/0 STR - 250 kcmil [70-120 SQ mm]	BLUE	PG50	
GCE500-500	4/0 STR - 500 kcmil [105-240 SQ mm]	5/8"-3/4" ROD [15.9-19.1 mm]	5/8" - 3/4"; #5-#6 REBAR [15.9-19.1mm; #16M-#19M REBAR]	4/0 STR - 500 kcmil [105-240 SQ mm]	YELLOW	PG55	

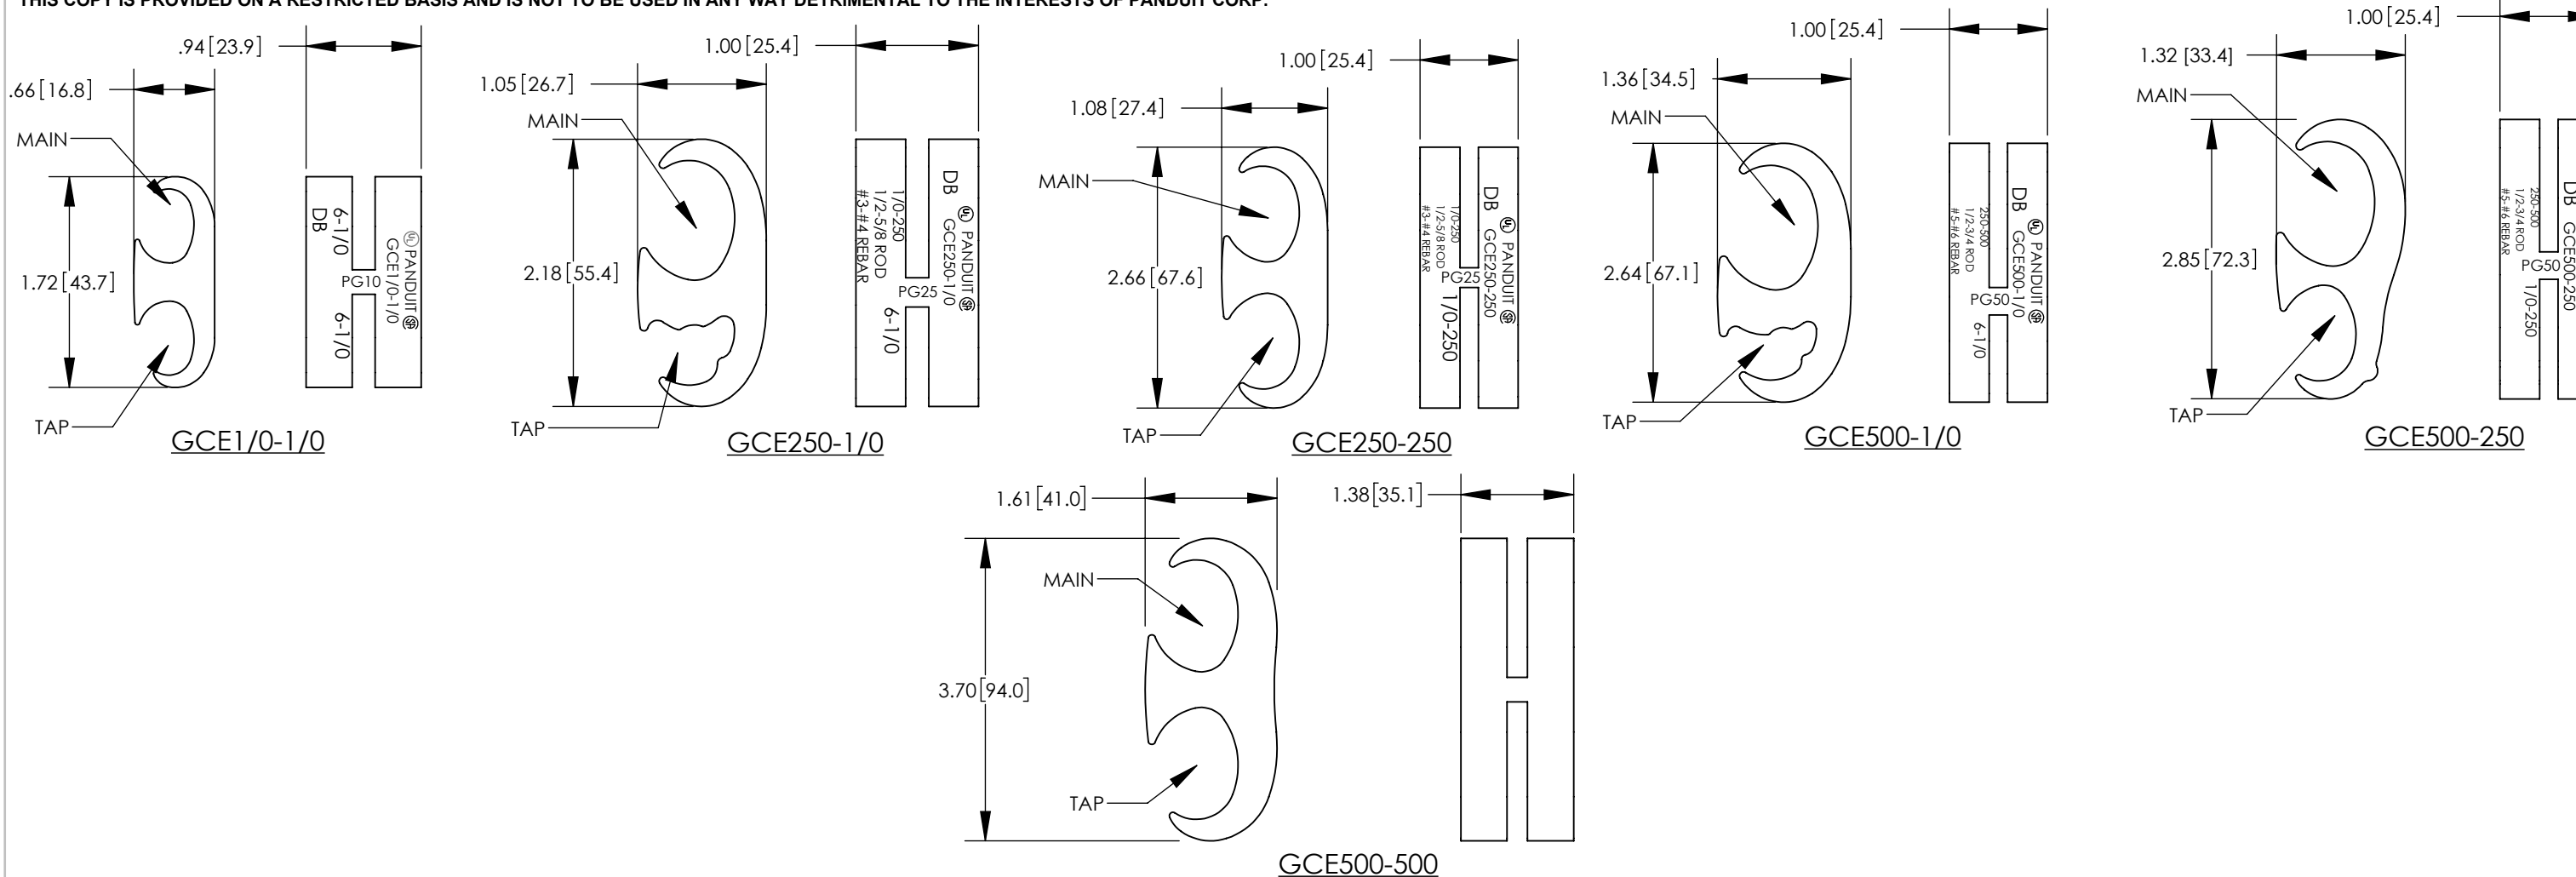

NOTES

- DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.
- UL 467 LISTED AND CSA 22.2 CERTIFIED FOR GROUNDING & BONDING SUITABLE FOR DIRECT BURIAL IN EARTH OR CONCRETE WHEN CRIMPED WITH PANDUIT OR INDUSTRY STANDARD CRIMPING TOOLS & PANDUIT DIES.
- ENHANCED CRIMP PROCESS WITH PATENTED TECHNOLOGY MEETS IEEE STD 837 - 2002. **NOTE: DOES NOT APPLY TO GCE500-500**
- PRE-APPLIED ANTIOXIDANT COMPOUND ENSURES A HIGH QUALITY MECHANICAL AND ELECTRICAL BOND, SPEEDING INSTALLATION.
- CABLE TIES ARE PROVIDED WITH THE TAPS TO RETAIN WIRES IN POSITION DURING CRIMPING.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03	4/17	JHNU	DAOS	RGB	ADDED GCE500-500 REVISED TITLE BLOCK	

TITLE				E-TAP GROUNDING CONNECTORS			
CUSTOMER DRAWING				N10652AK/03			
ITEM REVISION NAME				N10652AK-C41748/03.SLDDRW			
DATASET FILE NAME				UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]			
.X ±		.XXX ±		.XX ± .03 [0.8]		ANGLES ±	
DRAWN BY				THIRD ANGLE PROJECTION			
JHNU		DATE		12/10		SCALE	
CHK		RGB		N/A		SHEET 1 OF 1	
DRAWING NUMBER				C41748			
SIZE				B			