
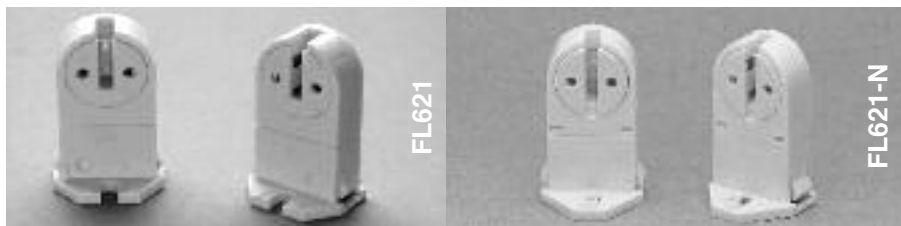



FLUORESCENT SOCKET MINIATURE BI-PIN T-5 LAMPHOLDERS

D4

FL621 Series
T-5 Tall Profile, Rotary Lock, Snap-In Screw Mount

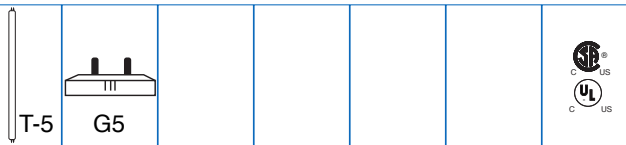


- Made from polycarbonate, rated 110°C
- Locking rotor design for maximum lamp retention
- Snap-in mount or screw mount to panel
- Quick connect push-in wire terminals for 18 AWG solid wire, stripped 3/8"
- Twin wireways for easy harness wiring.
- Wires from bottom of lampholder
- Snap-in mounts into a 0.023" – 0.040" (0.6 mm to 1.0 mm) panel thickness
- Rated 120W, 600V; suitable for HO lamps
- cCSA_{US} Certified / cUL_{US} Listed




PANEL CUTOUT


FL621
Snap-In,
Screw Mount

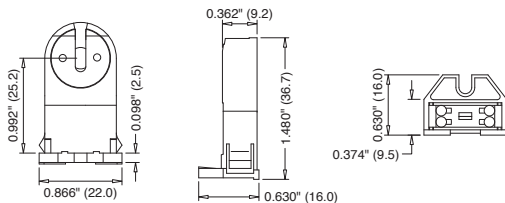


FL621-S
Snap-In,
Screw Mount,
Shunted

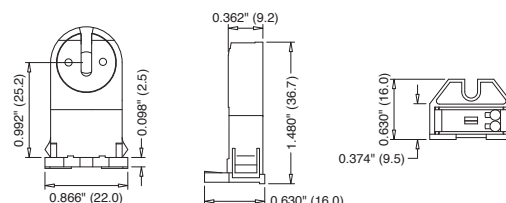


FL621-N
Snap-In,
Screw Mount,
Locating Nib

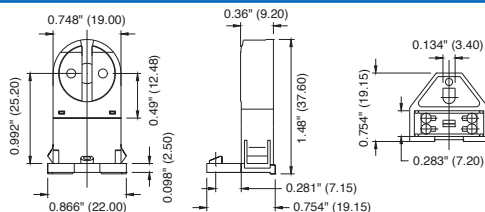


FL621-SN
Snap-In,
Screw Mount,
Shunted,
Locating Nib

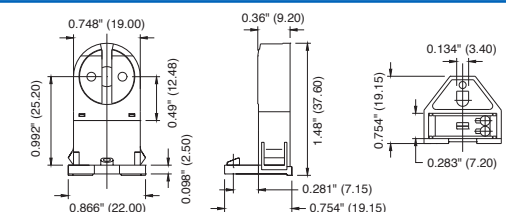

FL622 Series
T-5 Medium / Short Profile, Rotary Lock,
Snap-In, Screw Mount

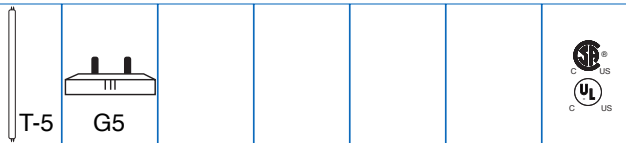

- Made from polycarbonate, rated 110°C
- Locking rotor design for maximum lamp retention
- Snap-in mount or screw mount to panel
- Quick connect push-in wire terminals for 18 AWG solid wire, stripped 3/8"
- Twin wireways for easy harness wiring.
- Wires from bottom of lampholder
- Snap-in mounts into a 0.023" – 0.040" (0.6 mm to 1.0 mm) panel thickness
- Rated 120W, 600V; suitable for HO lamps
- cCSA_{US} Certified / cUL_{US} Listed



PANEL CUTOUT