

Safety- and code-driven solutions brought to you by Legrand.

885TR, 885TRNA, 885TRS, 885TRWR


Aesthetically improved yet reliable as ever, these tamper-resistant receptacles are equipped with a patented shutter system—now with black “invisi-shutters” that disappear for an invisible effect preferred by end users—to help prevent improper insertion of foreign objects. These UL listed receptacles comply with 2014 NEC® Article 406.12, and as part of the radiant® collection, now offer a better fit, form and finish. Ideal for residential, multi-dwelling and hospitality applications.



Features & Benefits

Extra-long strap

High-impact resistant thermoplastic construction.

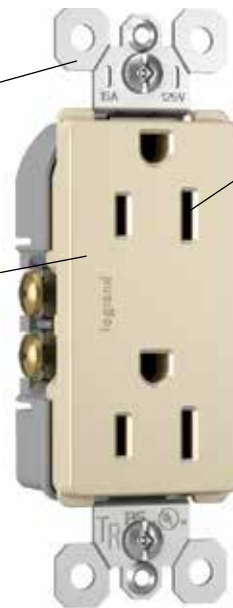


Protects children: patented shutter system — now with black “invisi-shutters” that disappear for an invisible effect — helps prevent improper insertion of foreign objects.

885TRLA

- Part of the radiant® collection.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Quickloop wire looping aid.
- Long-term blade retention.
- Longer tri-drive screws for easier 12 AWG looping.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid wire.
- Push wire accepts #14 AWG solid only.
- Superior protection to traditional outlet “caps” or “protection plates.”
- Low profile face.
- Self-grounding models provide automatic ground clip.

3rd Party Compliance

 UL Listed, File Number E140596, Standard UL498, CSA/CUL approved. cULus listed. Standard CSA C22.2 No. 42. Conform to NEMA WD-1 and WD-6.

Technical Information

Performance

Electrical

Dielectric Withstand Voltage	2000V Min.
Maximum Working Voltage	125V
Current Interrupting	15A
Temperature Rise	30° Max.

Mechanical


Terminal Identification	Terminal Identification in accordance with UL 498 (Brass, White, Green)
Terminal Accommodation	#12 - #14 AWG
Product Identification	Ratings are a permanent part of the device

Environmental

Flammability	Complies with UL498
--------------	---------------------

Materials

Face	Thermoplastic (PVC)
Back Body	Thermoplastic
Line Contacts	.031 Brass
Mounting Strap	.040 Zinc-Plated Steel
Ground Contacts	Brass
Tamper-Resistant Shutters	Thermoplastic (Delrin)
Terminal Screws	#8 Tri-Drive Plated Steel
Ground Screw	#8, Hex Tri-Drive, Plated Steel, Green Chromate
Auto-Ground Clip	Plated Steel
Mounting Screws	#6, Tri-Drive, Steel

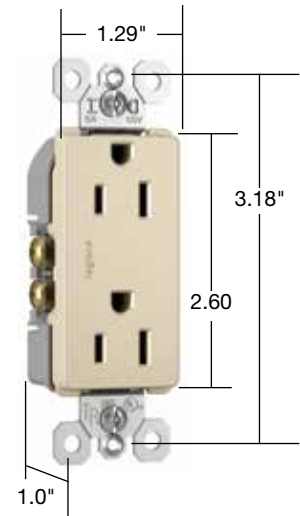

885TRSLA

Warranty

1 Year

Ordering Information

Tamper-Resistant Receptacles

Catalog Number	Rating		Color	NEMA Config. No.	3rd Party Compliance		
	A	VAC			UL498	C22.2 No. 42	cULus
885TRI	15	125	Ivory	5-15R	•	•	•
885TRW	15	125	White	5-15R	•	•	•
885TR	15	125	Brown	5-15R	•	•	•
885TRGRY	15	125	Gray	5-15R	•	•	•
885TRBK	15	125	Black	5-15R	•	•	•
885TRLA	15	125	Light Almond	5-15R	•	•	•
885TRNICC12	15	125	Nickel	5-15R	•	•	•
885TRDBCC12	15	125	Dark Bronze	5-15R	•	•	•

Self-Grounding Tamper-Resistant Receptacles

885TRSI	15	125	Ivory	5-15R	•	•	•
885TRSW	15	125	White	5-15R	•	•	•
885TRSLA	15	125	Light Almond	5-15R	•	•	•

Tamper-Resistant, Weather-Resistant Receptacles

885TRWR	15	125	Brown	5-15R	•	•	•
885TRWRI	15	125	Ivory	5-15R	•	•	•
885TRWRLA	15	125	Light Almond	5-15R	•	•	•
885TRWRW	15	125	White	5-15R	•	•	•

NAFTA-Compliant Tamper-Resistant Receptacles

885TRNAI	15	125	Ivory	5-15R	•	•	•
885TRNAW	15	125	White	5-15R	•	•	•
885TR	15	125	Brown	5-15R	•	•	•
885TRNAGRY	15	125	Gray	5-15R	•	•	•
885TRBK	15	125	Black	5-15R	•	•	•
885TRNALA	15	125	Light Almond	5-15R	•	•	•

2 Pole, 3 Wire



NEMA
5-15R