

NH Mobile Ladder Stands* – No Handrail


- 1" x 16 ga. round tube construction
- 15" platform depth
- 3" spring-loaded non-marking casters
- 24"x 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 26" overall width
- 400 lb. capacity
- Durable blue powder coat finish

OPTIONS:
~ Extended platforms
Please call for details.



Part Number	No. of Steps	Platform Height (in.)	Base Size (in.) LxW	Weight (lbs.)	Shipping Size (in.) LxWxH
1NH	1	9	18x28	25	18x28x10
2NH	2	18	24x28	30	24x28x19
3NH	3	27	31x28	40	31x28x28
4NH	4	36	37x28	55	37x28x37
5NH	5	45	43x28	65	43x28x46

Parts for all NH ladders

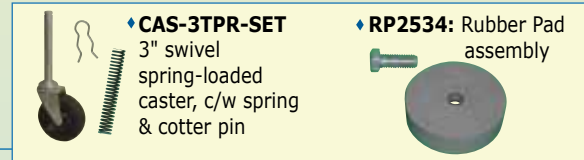

NH-SS Stainless Steel Mobile Ladder Stands* – No Handrail

- 1" stainless steel round tube construction
- Clean room finish
- 304 #4 brushed finish
- 24" x 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 3" spring-loaded non-marking casters
- 15" platform depth
- All components except casters and springs are fabricated from high quality stainless steel
- 400 lbs. capacity
- Ships all welded

OPTIONS:
~ Extended platforms
~ 316 #4 brushed finish
Please call for details.

Part Number	No. of Steps	Platform Height (in.)	Base Size (in.) LxW	Weight (lbs.)	Shipping Size (in.) LxWxH
1NH-SS	1	9	18x28	30	18x28x10
2NH-SS	2	18	24x28	40	24x28x19
3NH-SS	3	27	31x28	53	31x28x28
4NH-SS	4	36	37x28	62	37x28x37
5NH-SS	5	45	43x28	95	43x28x46

ANH Aluminum Mobile Ladder Stands* – No Handrail

- 1" aluminum round tube construction
- 24" x 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 3" spring-loaded non-marking casters
- 15" platform depth
- 300 lbs. capacity
- Ships all welded
- Durable blue powder coat finish

Part Number	No. of Steps	Platform Height (in.)	Base Size (in.) LxW	Weight (lbs.)	Shipping Size (in.) LxWxH
1ANH	1	9	18x28	14	18x28x10
2ANH	2	18	24x28	24	24x28x19
3ANH	3	27	31x28	32	31x28x28
4ANH	4	36	37x28	37	37x28x37
5ANH	5	45	43x28	57	43x28x46

- * Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
 - Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
 - Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
 - Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum
- See website for:
- Ladder Assembly Instructions and User Guide
 - Schematic Drawings with dimensions and isometric view
 - Canway Certification Statement covering Mobile Ladder Stands

SNH Safety Angle Mobile Ladder Stands* – No Handrail

- 50° safety angle
- 1" x 16 ga. round tube construction
- 19" platform depth
- 3" spring-loaded non-marking casters
- 24" x 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 26" overall width
- 400 lb. capacity
- Durable blue powder coat finish



Diamond Channel Grating




DCG-H 7-1/2" deep tread standard
DCG-SH 9-1/2" deep tread for safety ladders

Part Number	No. of Steps	Platform Height (in.)	Base Size (in.)	Weight (lbs.)	Shipping Size (in.) LxWxH
2SNH	2	20	31x28	47	31x28x21
3SNH	3	30	41x28	57	41x28x31
4SNH	4	40	50x28	67	50x28x41

Parts for all SNH ladders



♦ **CAS-3TPR-SET**
 3" swivel spring-loaded caster, c/w spring & cotter pin



SNH-SS Stainless Steel Safety Angle Mobile Ladder Stands* – No Handrail

- 1" Type 304 stainless steel round tube construction
- Clean room finish
- 304 #4 brushed finish
- 24" x 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 3" spring-loaded non-marking casters
- 19" platform depth
- 400 lbs. capacity
- All components except casters and springs are fabricated from high quality stainless steel
- Ships all welded

Part Number	No. of Steps	Platform Height (in.)	Base Size (in.)	Weight (lbs.)	Shipping Size (in.) LxWxH
2SNH-SS	2	20	31x28	47	31x28x21
3SNH-SS	3	30	41x28	57	41x28x31
4SNH-SS	4	40	50x28	67	50x28x41

ASNH Aluminum Safety Angle Mobile Ladder Stands* – No Handrail

- 1" aluminum round tube construction
- 24" x 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 3" spring-loaded non-marking casters
- 19" platform depth
- 300 lbs. capacity
- Ships all welded
- Durable blue powder coat finish

Part Number	No. of Steps	Platform Height (in.)	Base Size (in.)	Weight (lbs.)	Shipping Size (in.) LxWxH
2ASNH	2	20	31x28	28	31x28x21
3ASNH	3	30	41x28	34	41x28x31
4ASNH	4	40	50x28	40	50x28x41

Shipping Details:

1-5 step ladders ship fully assembled.
 6 step and larger ladders ship knocked down.
 Shipping 6 step and larger ladders fully assembled is only available on select sizes. Extra freight charges will be incurred.

- H Mobile Ladder Stands: 6H – 14H
- SH Safety Angle Mobile Ladder Stands: 6SH – 8SH
- HR RIP Mobile Ladder Stands: 6HR – 14HR
- SHR RIP Mobile Ladder Stands: 6SHR – 9SHR

- * Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
- Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
- Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
- Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum

See website for:

- Ladder Assembly Instructions and User Guide
- Schematic Drawings with dimensions and isometric view
- Canway Certification Statement covering Mobile Ladder Stands

♦ Stock item


H Mobile Ladder Stands* – With Handrails

- 1" x 16 ga. round tube construction
- 42" high handrail
- 15" platform depth
- 5"x1-1/4" RSX rubber swivel casters on trip step mechanism
- 3" spring-loaded casters on 1H-3H
- Positive floor locking trip step mechanism on 4H and up
- 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 400 lb. capacity
- 1H – 5H ship fully assembled; 6H – 20H ship knocked down
- Durable blue powder coat finish

OPTIONS:

- ~ Front or side walk-through
 - ~ Fold-down handrail
 - ~ Extended platform
- Please call for details.*

Diamond Channel Grating



DCG-H 7-1/2" deep tread standard
DCG-SH 9-1/2" deep tread for safety ladders

Wheel Description
 For all wheel & caster info & details, please see Section 13.




◆ **6PO**
 6" polyolefin wheel (4H-7H ladders)




◆ **8PO**
 8" polyolefin wheel (8H-20H ladders)



Parts for 1H – 3H ladders



Parts for 4H – 20H ladders



Parts for H ladders



Part Number	No. of Steps	Platform Height (in.)	Step Width (in.)	Base Size (in.)	Weight (lbs.)	Wheel/Caster Type & Size (in.)	Shipping Size (in.) LxWxH
1H	1	9	24	18x28	35	3" spring-loaded non-marking casters	18x28x51
2H	2	18	24	24x28	50		24x28x60
◆ 3H	3	27	24	31x28	60		31x28x69
◆ 4H	4	36	24	37x34	85	5" rubber casters	37x34x78
◆ 5H	5	45	24	43x34	95		43x34x87
◆ 6H	6	54	24	48x34	115	6" polyolefin wheels	102x34x39
7H	7	63	24	53x34	125		110x34x39
◆ 8H	8	72	28	59x38	150	5" rubber casters 8" polyolefin wheels	124x38x39
9H	9	81	28	65x38	170		136x38x39
◆ 10H	10	90	28	70x38	175		144x38x39
11H	11	99	28	75x38	180		155x38x39
◆ 12H	12	108	28	81x38	200		166x38x39
13H	13	117	28	86x38	215		177x38x39
14H	14	126	28	89x38	250		187x38x39
15H	15	135	28	94x38	260		197x38x39
16H	16	144	28	100x38	270		208x38x39

The following ladders are special order and cannot be returned – please check measurements carefully.

17H	17	153	28	106x46	315	5" rubber casters 8" polyolefin wheels	219x46x39
18H	18	162	28	111x46	325		229x46x39
19H	19	171	28	117x46	345		240x46x39
20H	20	180	28	122x46	355		249x46x39

- * Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
- Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
- Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
- Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum

See website for:

- Ladder Assembly Instructions and User Guide
- Schematic Drawings with dimensions and isometric view
- Canway Certification Statement covering Mobile Ladder Stands

◆ Stock item