



SIRIUS, COMPACT STARTER, DIRECT STARTER 400 V, 24 V  
AC/DC, 50 ... 60 HZ, 8 ... 32 A, IP20, CONNECTION MAIN CIRCUIT:  
SCREW TERMINAL, CONNECTION AUXILIARY CIRCUIT: SCREW  
TERMINAL

product brand name	SIRIUS
Product designation	compact starter
Design of the product	direct starter

### General technical data:

<b>Product function</b>	
• Control circuit interface to parallel wiring	Yes
<b>Product expansion</b>	
• Auxiliary switch	Yes
<b>Insulation voltage</b>	
• Rated value	690 V
<b>Surge voltage resistance Rated value</b>	6 000 V
<b>maximum permissible voltage for safe isolation</b>	
• between auxiliary and auxiliary circuit	250 V
• between control and auxiliary circuit	300 V
• between main and auxiliary circuit	400 V
<b>Protection class IP</b>	IP20
<b>Degree of pollution</b>	3
<b>Vibration resistance</b>	f= 4 ... 5.8 Hz, d= 15 mm; f= 5.8 ... 500 Hz, a= 20 m/s <sup>2</sup> ; 10 cycles
<b>Mechanical service life (switching cycles)</b>	
• of the main contacts typical	10 000 000
• of the auxiliary contacts typical	10 000 000
• of the signaling contacts typical	10 000 000
<b>Electrical endurance (switching cycles) of the auxiliary contacts</b>	
• at DC-13 at 6 A at 24 V typical	100 000

• at AC-15 at 6 A at 230 V typical	500 000
<b>Electrical endurance (switching cycles) of the signaling contacts</b>	
• at DC-13 at 6 A at 24 V typical	100 000
• at AC-15 at 6 A at 230 V typical	500 000
<b>Type of assignment</b>	continuous operation according to IEC 60947-6-2
<b>Equipment marking</b>	
• acc. to DIN EN 61346-2	Q

#### Ambient conditions:

<b>Installation altitude at height above sea level maximum</b>	2 000 m
<b>Ambient temperature</b>	
• during operation	-20 ... +60 °C
• during storage	-55 ... +80 °C
• during transport	-55 ... +80 °C
<b>Relative humidity during operation</b>	10 ... 90 %

#### Main circuit:

<b>Number of poles for main current circuit</b>	3
<b>Adjustable response value current of the current-dependent overload release</b>	8 ... 32 A
<b>Formula for making capacity limit current</b>	$12 \times I_e$
<b>Formula for interruption capacity limit current</b>	$10 \times I_e$
<b>Mechanical power output for 4-pole AC motor</b>	
• at 400 V Rated value	15 kW
• at 500 V Rated value	11 kW
• at 690 V Rated value	11 kW
<b>Operating voltage</b>	
• at AC-3 Rated value maximum	690 V
<b>Operating current</b>	
• at AC at 400 V Rated value	32 A
• at AC-43	
— at 400 V Rated value	29 A
— at 500 V Rated value	17.6 A
— at 690 V Rated value	12.8 A
<b>No-load switching frequency</b>	3 600 1/h
<b>Operating frequency</b>	
• at AC-41 acc. to IEC 60947-6-2 maximum	750 1/h
• at AC-43 acc. to IEC 60947-6-2 maximum	250 1/h

#### Control circuit/ Control:

<b>Type of voltage</b>	AC
<b>Control supply voltage 1 at AC</b>	

• at 50 Hz Rated value	24 V
• at 60 Hz Rated value	24 V
<b>Control supply voltage 1</b>	
• at DC Rated value	24 V
• Rated value	50 Hz
<b>Control supply voltage frequency 2 Rated value</b>	60 Hz
<b>Holding power</b>	
• with AC maximum	3.5 W
• for DC maximum	3.1 W

#### Auxiliary circuit:

<b>Number of NC contacts</b>	
• for auxiliary contacts	1
<b>Number of NO contacts</b>	
• for auxiliary contacts	1
• of the instantaneous short-circuit release for signaling contact	1
<b>Number of CO contacts</b>	
• of the current-dependent overload release for signaling contact	1
<b>Operating current of the auxiliary contacts at AC-12 maximum</b>	10 A
<b>Operating current of the auxiliary contacts at DC-13</b>	
• at 250 V	0.27 A

#### Protective and monitoring functions:

<b>Trip class</b>	CLASS 10 and 20 adjustable
<b>OFF-delay time</b>	50 ms
<b>Operational short-circuit current breaking capacity (Ics)</b>	
• at 400 V	53 kA
• at 500 V Rated value	1 kA
• at 690 V Rated value	1 kA

#### UL/CSA ratings:

<b>Full-load current (FLA) for three-phase AC motor</b>	
• at 480 V Rated value	32 A
<b>yielded mechanical performance [hp]</b>	
• for three-phase AC motor	
— at 200/208 V Rated value	7.5 hp
— at 220/230 V Rated value	10 hp
— at 460/480 V Rated value	20 hp
<b>Contact rating of the auxiliary contacts acc. to UL</b>	contacts 21-22, 13-14, 43-44 Q600 / A600, contacts 77-78 R300 / B300, contacts 95-96-98 R300 / D300

**Short-circuit:****Design of the fuse link**

- for short-circuit protection of the auxiliary switch required
- for short-circuit protection of the signaling switch of the short-circuit release required
- for short-circuit protection of the signaling switch of the overload release required

fuse gL/gG: 10 A

6A gL/gG/400V

4A gL/gG/400V

**Installation/ mounting/ dimensions:****mounting position**

- recommended

any

vertical, on horizontal standard mounting rail

**Mounting type**

screw and snap-on mounting

**Height**

170 mm

**Width**

45 mm

**Depth**

165 mm

**Connections/ Terminals:****Product function**

- removable terminal for main circuit
- removable terminal for auxiliary and control circuit

Yes

Yes

**Type of electrical connection**

- for main current circuit
- for auxiliary and control current circuit

screw-type terminals

screw-type terminals

**Type of connectable conductor cross-section**

- for main contacts
  - solid
  - finely stranded with core end processing
- for AWG conductors for main contacts

2x (2.5 ... 6 mm<sup>2</sup>), 1x 10 mm<sup>2</sup>2x (2.5 ... 6 mm<sup>2</sup>)

2x (14 ... 10), 1x 8

**Type of connectable conductor cross-section**

- for auxiliary contacts
  - solid
  - finely stranded with core end processing
- for AWG conductors for auxiliary contacts

0.5 ... 4 mm<sup>2</sup>, 2x (0.5 ... 2.5 mm<sup>2</sup>)0.5 ... 2.5 mm<sup>2</sup>, 2x (0.5 ... 1.5 mm<sup>2</sup>)

2x (20 ... 14)

**Safety related data:****B10 value with high demand rate acc. to SN 31920**

2 000 000

**Proportion of dangerous failures**

- with low demand rate acc. to SN 31920
- with high demand rate acc. to SN 31920

40 %

50 %

**T1 value for proof test interval or service life acc. to IEC 61508**

20 y

**Communication/ Protocol:**

Product function Bus communication	No
------------------------------------	----

#### Electromagnetic compatibility:

Conducted interference due to burst acc. to IEC 61000-4-4	4 kV main contacts, 2 kV auxiliary contacts
Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5	4 kV main contacts, 2 kV auxiliary contacts
Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5	2 kV main contacts, 1 kV auxiliary contacts
Conducted interference due to high-frequency radiation acc. to IEC 61000-4-6	0.15-80MHz at 10V
Field-bound parasitic coupling acc. to IEC 61000-4-3	10 V/m
Electrostatic discharge acc. to IEC 61000-4-2	8 kV
Conducted HF-interference emissions acc. to CISPR11	150 kHz ... 30 MHz Class A
Field-bound HF-interference emission acc. to CISPR11	30 ... 1000 MHz Class A

#### Supply voltage:

Supply voltage required Auxiliary voltage	No
---	----

#### Certificates/ approvals:

General Product Approval	EMC	Functional Safety/Safety of Machinery
--------------------------	-----	---------------------------------------



Declaration of Conformity	Test Certificates	Shipping Approval
---------------------------	-------------------	-------------------



[Typprüfbescheinigung/Werkszeugnis](#)



Shipping Approval	other
-------------------	-------



[Umweltbestätigung](#)

#### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrymall>

**Cax online generator**


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA61201EB32>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RA61201EB32>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RA61201EB32&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA61201EB32&lang=en)

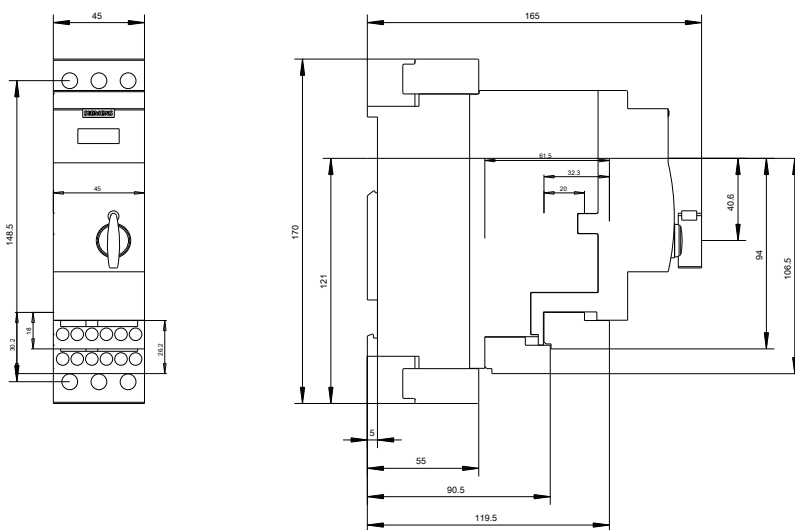

last modified:

29.06.2015