



CONTACTOR, AC-3, 4KW/400V, 1NO, DC 24V, W. INTEGRATED DIODE 3-POLE, SZ S00 SPRING-LOADED TERMINAL

| | |
|---|----------------------------|
| product brand name | SIRIUS |
| Product designation | 3RT2 contactor |
| General technical data: | |
| Size of contactor | S00 |
| Product expansion | No |
| <ul style="list-style-type: none"> function module for communication Auxiliary switch | Yes |
| Insulation voltage | 690 V |
| <ul style="list-style-type: none"> Rated value | 690 V |
| Surge voltage resistance Rated value | 6 kV |
| maximum permissible voltage for safe isolation between coil and main contacts acc. to EN 60947-1 | 400 V |
| Protection class IP | IP20 |
| <ul style="list-style-type: none"> on the front of the terminal | IP20 |
| Degree of pollution | 3 |
| Shock resistance | |
| <ul style="list-style-type: none"> at rectangular impulse <ul style="list-style-type: none"> at DC with sine pulse <ul style="list-style-type: none"> at DC | 6,7g / 5 ms, 4,2g / 10 ms |
| | 10,5g / 5 ms, 6,6g / 10 ms |
| Mechanical service life (switching cycles) | |
| <ul style="list-style-type: none"> of the contactor typical of the contactor with added electronics-compatible auxiliary switch block typical | 30 000 000 |
| | 5 000 000 |

- of the contactor with added auxiliary switch block typical

10 000 000

Ambient conditions:

| | |
|--|----------------|
| Installation altitude at height above sea level maximum | 2 000 m |
| Ambient temperature | |
| • during operation | -25 ... +60 °C |
| • during storage | -55 ... +80 °C |

Main circuit:

| | |
|--|---------------------|
| Number of NO contacts for main contacts | 3 |
| Number of NC contacts for main contacts | 0 |
| Operating voltage | |
| • at AC-3 Rated value maximum | 690 V |
| Operating current | |
| • at AC-1 at 400 V | |
| — at ambient temperature 40 °C Rated value | 22 A |
| • at AC-1 up to 690 V | |
| — at ambient temperature 40 °C Rated value | 22 A |
| — at ambient temperature 60 °C Rated value | 20 A |
| • at AC-2 at 400 V Rated value | 9 A |
| • at AC-3 | |
| — at 400 V Rated value | 9 A |
| — at 500 V Rated value | 7.7 A |
| — at 690 V Rated value | 6.7 A |
| Connectable conductor cross-section in main circuit at AC-1 | |
| • at 60 °C minimum permissible | 2.5 mm ² |
| • at 40 °C minimum permissible | 4 mm ² |
| Operating current for ≥ 200000 operating cycles at AC-4 | |
| • at 400 V Rated value | 4.1 A |
| • at 690 V Rated value | 3.3 A |
| Operating current | |
| • with 1 current path at DC-1 | |
| — at 24 V Rated value | 20 A |
| — at 110 V Rated value | 2.1 A |
| — at 220 V Rated value | 0.8 A |
| — at 440 V Rated value | 0.6 A |
| — at 600 V Rated value | 0.6 A |
| • with 2 current paths in series at DC-1 | |
| — at 24 V Rated value | 20 A |
| — at 110 V Rated value | 12 A |

| | |
|--|--------|
| — at 220 V Rated value | 1.6 A |
| — at 440 V Rated value | 0.8 A |
| — at 600 V Rated value | 0.7 A |
| • with 3 current paths in series at DC-1 | |
| — at 24 V Rated value | 20 A |
| — at 110 V Rated value | 20 A |
| — at 220 V Rated value | 20 A |
| — at 440 V Rated value | 1.3 A |
| — at 600 V Rated value | 1 A |
| Operating current | |
| • with 1 current path at DC-3 at DC-5 | |
| — at 24 V Rated value | 20 A |
| — at 110 V Rated value | 0.1 A |
| • with 2 current paths in series at DC-3 at DC-5 | |
| — at 110 V Rated value | 0.35 A |
| — at 24 V Rated value | 20 A |
| • with 3 current paths in series at DC-3 at DC-5 | |
| — at 110 V Rated value | 20 A |
| — at 220 V Rated value | 1.5 A |
| — at 24 V Rated value | 20 A |
| — at 440 V Rated value | 0.2 A |
| — at 600 V Rated value | 0.2 A |
| Operating power | |
| • at AC-1 | |
| — at 230 V Rated value | 7.5 kW |
| — at 230 V at 60 °C Rated value | 7.5 kW |
| — at 400 V Rated value | 13 kW |
| — at 400 V at 60 °C Rated value | 13 kW |
| — at 690 V Rated value | 22 kW |
| — at 690 V at 60 °C Rated value | 22 kW |
| • at AC-2 at 400 V Rated value | 4 kW |
| • at AC-3 | |
| — at 230 V Rated value | 2.2 kW |
| — at 400 V Rated value | 4 kW |
| — at 690 V Rated value | 5.5 kW |
| Operating power for ≥ 200000 operating cycles at AC-4 | |
| • at 400 V Rated value | 2 kW |
| • at 690 V Rated value | 2.5 kW |
| Thermal short-time current restricted to 10 s | 72 A |
| Active power loss at AC-3 at 400 V for rated value of the operating current per conductor | 0.7 W |

| | |
|---|------------|
| No-load switching frequency | |
| <ul style="list-style-type: none"> • at DC | 10 000 1/h |
| Operating frequency | |
| <ul style="list-style-type: none"> • at AC-1 maximum | 1 000 1/h |
| <ul style="list-style-type: none"> • at AC-2 maximum | 750 1/h |
| <ul style="list-style-type: none"> • at AC-3 maximum | 750 1/h |
| <ul style="list-style-type: none"> • at AC-4 maximum | 250 1/h |

Control circuit/ Control:

| | |
|---|---------------|
| Type of voltage of the control supply voltage | DC |
| Control supply voltage at DC | |
| <ul style="list-style-type: none"> • Rated value | 24 V |
| Operating range factor control supply voltage rated value of the magnet coil at DC | 0.8 ... 1.1 |
| Design of the surge suppressor | with diode |
| Closing power of the magnet coil at DC | 4 W |
| Holding power of the magnet coil for DC | 4 W |
| Closing delay | |
| <ul style="list-style-type: none"> • at DC | 30 ... 100 ms |
| Opening delay | |
| <ul style="list-style-type: none"> • at DC | 7 ... 13 ms |
| Arcing time | 10 ... 15 ms |
| Residual current of the electronics for control with signal <0> | |
| <ul style="list-style-type: none"> • at AC at 230 V maximum permissible | 3 mA |
| <ul style="list-style-type: none"> • at DC at 24 V maximum permissible | 10 mA |

Auxiliary circuit:

| | |
|---|------|
| Number of NC contacts | |
| <ul style="list-style-type: none"> • for auxiliary contacts — instantaneous contact | 0 |
| Number of NO contacts | |
| <ul style="list-style-type: none"> • for auxiliary contacts — instantaneous contact | 1 |
| Operating current at AC-12 maximum | 10 A |
| Operating current at AC-15 | |
| <ul style="list-style-type: none"> • at 230 V Rated value | 10 A |
| <ul style="list-style-type: none"> • at 400 V Rated value | 3 A |
| <ul style="list-style-type: none"> • at 500 V Rated value | 2 A |
| <ul style="list-style-type: none"> • at 690 V Rated value | 1 A |
| Operating current at DC-12 | |
| <ul style="list-style-type: none"> • at 24 V Rated value | 10 A |
| <ul style="list-style-type: none"> • at 48 V Rated value | 6 A |
| <ul style="list-style-type: none"> • at 60 V Rated value | 6 A |

| | |
|---|---|
| <ul style="list-style-type: none"> • at 110 V Rated value • at 125 V Rated value • at 220 V Rated value • at 600 V Rated value | <p>3 A</p> <p>2 A</p> <p>1 A</p> <p>0.15 A</p> |
| Operating current at DC-13 <ul style="list-style-type: none"> • at 24 V Rated value • at 48 V Rated value • at 60 V Rated value • at 110 V Rated value • at 125 V Rated value • at 220 V Rated value • at 600 V Rated value | <p>10 A</p> <p>2 A</p> <p>2 A</p> <p>1 A</p> <p>0.9 A</p> <p>0.3 A</p> <p>0.1 A</p> |
| Contact reliability of the auxiliary contacts | <p>1 faulty switching per 100 million (17 V, 1 mA)</p> |

UL/CSA ratings:

| | |
|--|--|
| Full-load current (FLA) for three-phase AC motor <ul style="list-style-type: none"> • at 480 V Rated value • at 600 V Rated value | <p>7.6 A</p> <p>9 A</p> |
| yielded mechanical performance [hp] <ul style="list-style-type: none"> • for single-phase AC motor <ul style="list-style-type: none"> — at 110/120 V Rated value — at 230 V Rated value • for three-phase AC motor <ul style="list-style-type: none"> — at 200/208 V Rated value — at 220/230 V Rated value — at 460/480 V Rated value — at 575/600 V Rated value | <p>0.33 hp</p> <p>1 hp</p> <p>2 hp</p> <p>3 hp</p> <p>5 hp</p> <p>7.5 hp</p> |
| Contact rating of the auxiliary contacts acc. to UL | <p>A600 / Q600</p> |

Short-circuit:

| | |
|--|---|
| Design of the fuse link <ul style="list-style-type: none"> • for short-circuit protection of the main circuit <ul style="list-style-type: none"> — with type of assignment 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required | <p>gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 35 A</p> <p>gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 20 A</p> <p>fuse gL/gG: 10 A</p> |
|--|---|

Installation/ mounting/ dimensions:

| | |
|--|---|
| mounting position | <p>+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface</p> |
| Mounting type <ul style="list-style-type: none"> • Side-by-side mounting | <p>screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022</p> <p>Yes</p> |

| | |
|---|-------|
| Height | 70 mm |
| Width | 45 mm |
| Depth | 73 mm |
| Required spacing | |
| <ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards 0 mm — Backwards 0 mm — upwards 0 mm — downwards 0 mm — at the side 0 mm • for grounded parts <ul style="list-style-type: none"> — forwards 0 mm — Backwards 0 mm — upwards 0 mm — at the side 6 mm — downwards 0 mm • for live parts <ul style="list-style-type: none"> — forwards 0 mm — Backwards 0 mm — upwards 0 mm — downwards 0 mm — at the side 6 mm | |

Connections/ Terminals:

| | |
|--|--|
| Type of electrical connection | |
| <ul style="list-style-type: none"> • for main current circuit • for auxiliary and control current circuit | <p>spring-loaded terminals</p> <p>spring-loaded terminals</p> |
| Type of connectable conductor cross-section | |
| <ul style="list-style-type: none"> • for main contacts <ul style="list-style-type: none"> — single or multi-stranded — finely stranded with core end processing — finely stranded without core end processing • for AWG conductors for main contacts | <p>2x (0,5 ... 4 mm²)</p> <p>2x (0.5 ... 2.5 mm²)</p> <p>2x (0.5 ... 2.5 mm²)</p> <p>2x (20 ... 12)</p> |
| Type of connectable conductor cross-section | |
| <ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> — single or multi-stranded — finely stranded with core end processing — finely stranded without core end processing • for AWG conductors for auxiliary contacts | <p>2x (0,5 ... 4 mm²)</p> <p>2x (0.5 ... 2.5 mm²)</p> <p>2x (0.5 ... 2.5 mm²)</p> <p>2x (20 ... 12)</p> |

Safety related data:

| | |
|--|-----------------|
| B10 value with high demand rate acc. to SN 31920 | 1 000 000 |
| Proportion of dangerous failures | |
| • with low demand rate acc. to SN 31920 | 40 % |
| • with high demand rate acc. to SN 31920 | 73 % |
| Product function | |
| • Mirror contact acc. to IEC 60947-4-1 | Yes; with 3RH29 |
| T1 value for proof test interval or service life acc. to IEC 61508 | 20 y |

Certificates/ approvals:

| | | |
|--------------------------|---------------------------------------|---------------------------|
| General Product Approval | Functional Safety/Safety of Machinery | Declaration of Conformity |
|--------------------------|---------------------------------------|---------------------------|



[Baumusterbescheinigung](#)



| | |
|-------------------|-------------------|
| Test Certificates | Shipping Approval |
|-------------------|-------------------|

[Typprüfbescheinigung/Werkszeugnis](#)

[spezielle Prüfbescheinigung](#)
[n](#)



| | |
|-------------------|-------|
| Shipping Approval | other |
|-------------------|-------|



[Bestätigungen](#)

[Umweltbestätigung](#)

| |
|-------|
| other |
|-------|



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)



<http://www.siemens.com/industrymall>


Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT20162FB41>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT20162FB41>

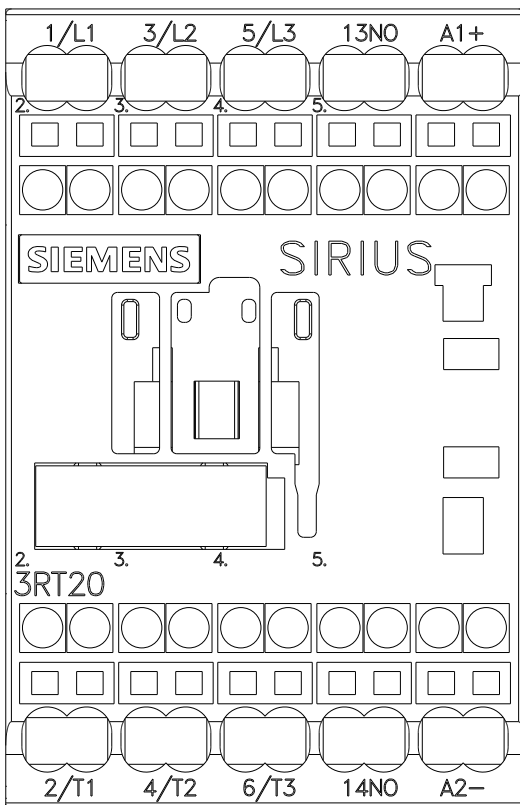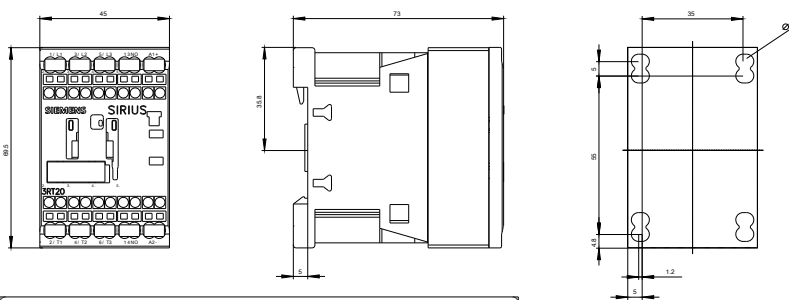

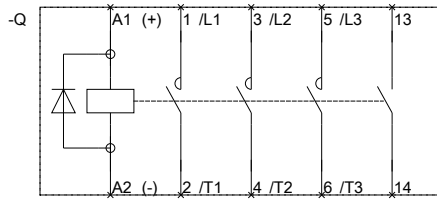

last modified:

29.06.2015