

## 4FT Linkable Wrap Light LED 3Way CCT Changeable




5280 LM



### Specification

Model No.	Power	Input Voltage	Brightness	CCT	L x W x H
ETLWRAP05-4FT/FJ/48/NDM/CCT	48W	120-277V	5820LM	3Way CCT Adjustable (3000K/4000K/5000K)	47.2" x 5.3" x 2.1"
ETLWRAP05-4FT/FJ/48/NDM/840	48W	120-277V	5820LM	4000K	47.2" x 5.3" x 2.1"
ETLWRAP05-4FT/FJ/48/NDM/850	48W	120-277V	5820LM	5000K	47.2" x 5.3" x 2.1"

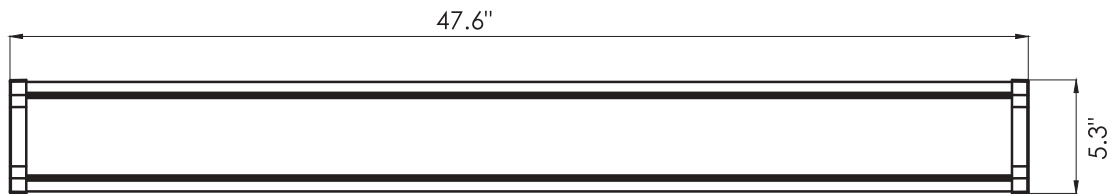

### General Characteristics

Fixture Life Hours	50000 Hours
Bulb	Integrated LED
Lumens Per Watt (LPW)	110.00

Safety Rating	ETL - Damp Location
---------------	---------------------

Fixture Characteristics	Linear
Shape	Linear
Mounting	Surface / Suspend
Use Location	Indoor

Electrical Characteristics	48 W
Watts	48 W
Volts	120-277V
Power Factor	0.95
Operating Temperature	-20°C to 45°C (-4°F to 113°F)

Light Characteristics	5280 Lumens
Brightness	5280 Lumens
Color Accuracy (CRI)	80
Color Temperature	4000K / 5000K / 3Way CCT
Beam Angle	110°

Product Dimensions	(L) 47.6 (W) 5.3 (H) 2.1
Item Dimensions (in)	(L) 47.6 (W) 5.3 (H) 2.1

Options: ( Sell Separately )	Double Head Male Connector Linking Cable Power Cord Chain Kit
---------------------------------	--

### Options: ( Sell Separately )



Connector

Linking Cable






Power Cord

Chain Kit






## 4FT Linkable Wrap Light LED 3Way CCT Changeable


### Surface Mounting

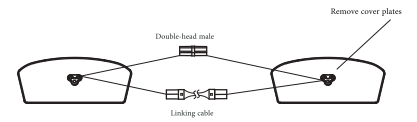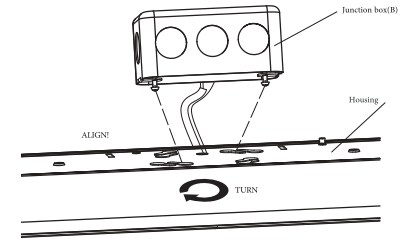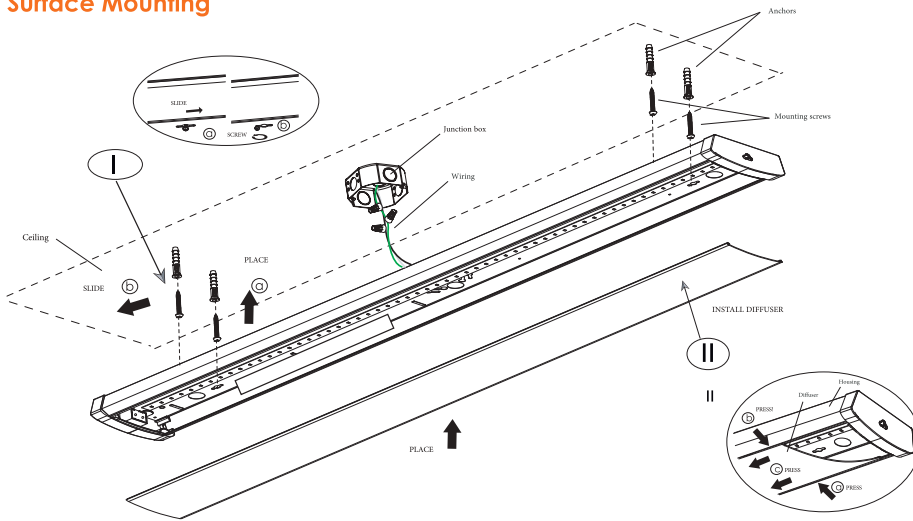

### Suspension Mounting

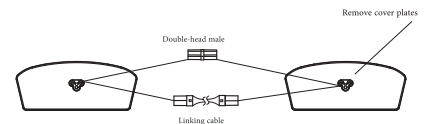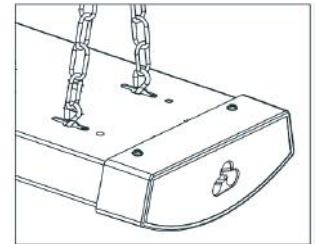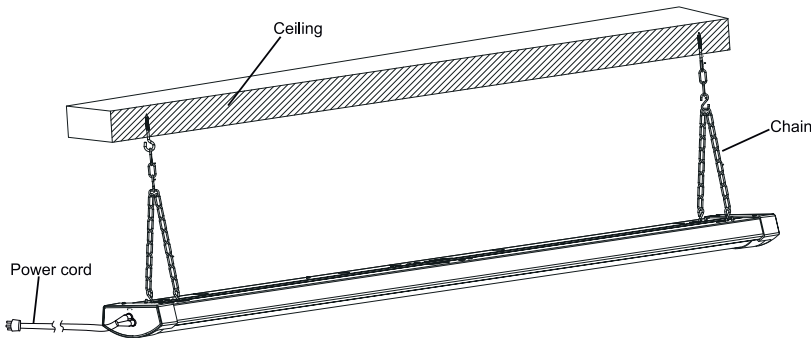

### Goniophotometer Test

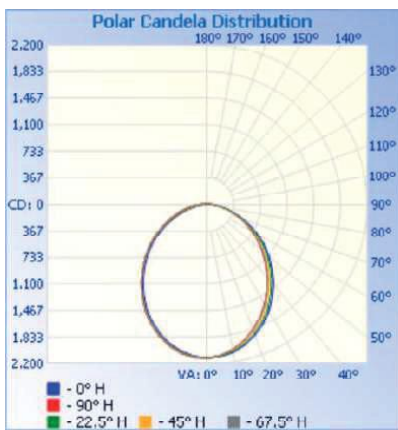

#### Flood Summary

	Efficiency	Lumens	Horizontal Spread	Vertical Spread
Field (%10):	%96.7	5,219.0	161.9	156.3
Beam (%50):	%64.7	3,489.3	99	101.8
Total:	%99.9	5,389.7		

Distance	Illuminance at a Distance	
	Center Beam FC	Beam Width
0.7ft	4,758.52 fc	1.6ft 1.6ft
1.3ft	1,189.63 fc	3.3ft 3.1ft
2.0ft	528.73 fc	4.9ft 4.7ft
2.7ft	297.41 fc	6.6ft 6.2ft
3.3ft	190.34 fc	8.2ft 7.8ft
4.0ft	132.18 fc	9.8ft 9.4ft

■ Vert. Spread: 101.8° ■ Horiz. Spread: 99.0°

