


Rotatable LED Wall Pack

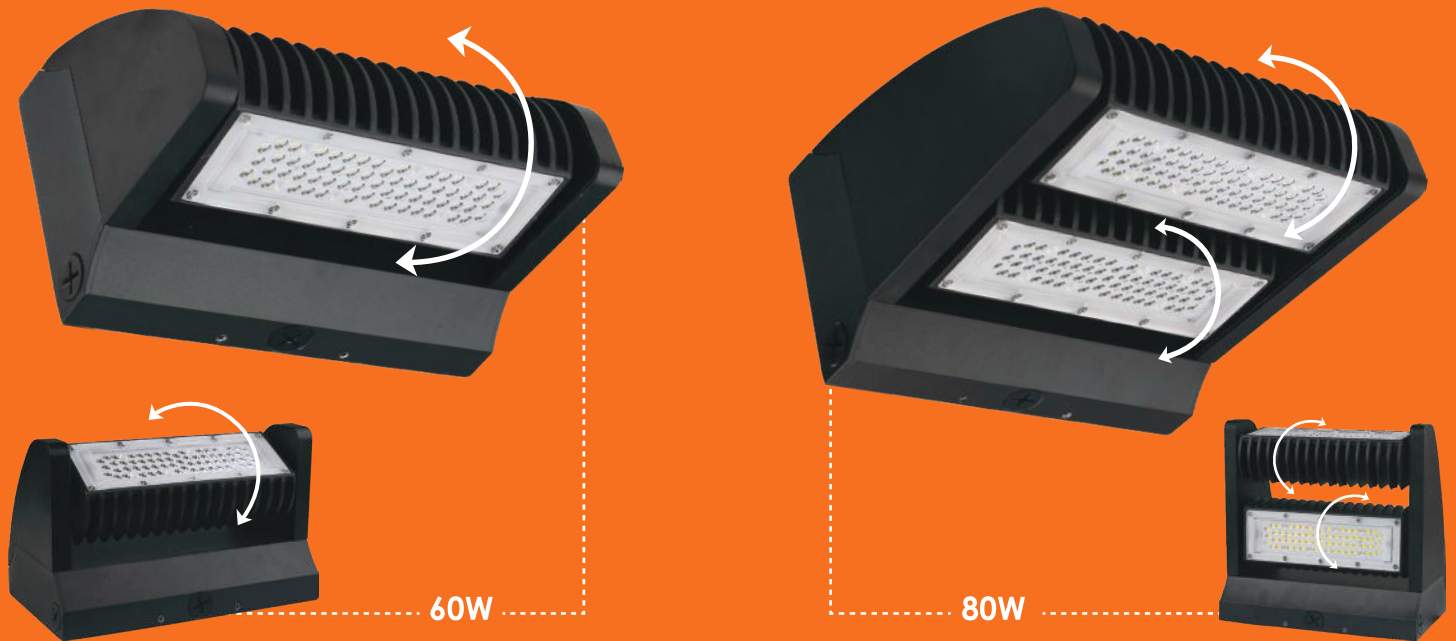

Features

- UL cUL DLC certificate
- IP65 Internal driver
- Input voltage: 100-277V
- No UV or IR in the beam
- Easy to install & operate
- Energy saving, long lifespan
- Instant start, No humming
- Green and eco-friendly without mercury

Application

- Entrance lighting, Courtyard lighting
- Industrial lighting, Outdoor landscape lighting
- Building, The hotel
- Wall lighting area and so on

Specification




	SNC-RWP02-60W	SNC-RWP02-80W
Model No.	SNC-RWP02-60W	SNC-RWP02-80W
Dimension	9.1" x 5.2" x 5.6"	9.1" x 5.2" x 8.9"
Color Temperature	5000 K	5000 K
CRI	>70	>70
Lumen	7200-7800 LM	10400-11200 LM
Lumen Efficiency	120-130 LM/W	130-140 LM/W
Input Power	60W	80W
Viewing Angle	60°	60°
Input Voltage	100-277V 50/60Hz	100-277V 50/60Hz
PF	> 0.9	> 0.9
LED Type	SMD 2835 (0.5W)	SMD 2835 (0.5W)
LED QTY	63 Pcs	98 Pcs
Housing	Aluminium	Aluminium
Housing Color	Brown	Brown
Operating Temperature	-20°C (-4°F)—45°C (113°F)	-20°C (-4°F)—45°C (113°F)
Operating Humidity	20% - 90% RH	20% - 90% RH
Storage Temperature	-30°C (-22°F)—80°C (176°F)	-30°C (-22°F)—80°C (176°F)
Storage Humidity	10% - 95% RH	10% - 95% RH
Application	Indoor/ Outdoor	Indoor/ Outdoor
Certification	UL , cUL , DLC	UL , cUL , DLC
Warranty Time	5 Years	5 Years



Rotatable LED Wall Pack

SNC-RWP02-60W

DATA OF LAMP		PHOTOMETRIC DATA Eff: 124.22 lm/W			
MODE		I _{max} (cd)	6744	S/MH (C0/180)	0.87
NOMINAL POWER (W)	60	LOR (%)	100.0	S/MH (C90/270)	0.92
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	7475.1	η UP, DN (C0-180)	0.1, 49.2
NOMINAL FLUX (lm)	7475.12	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 50.6
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	120.0	η down (%)	99.8	CIBSE SHR MAX	0.95

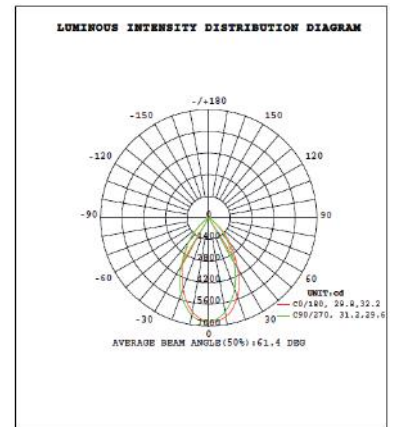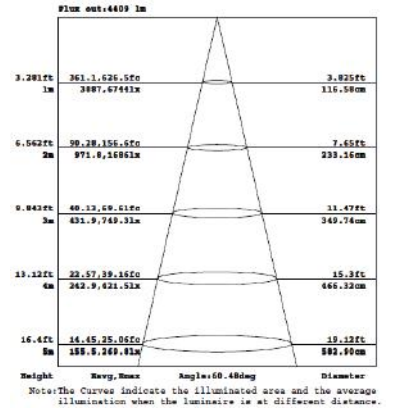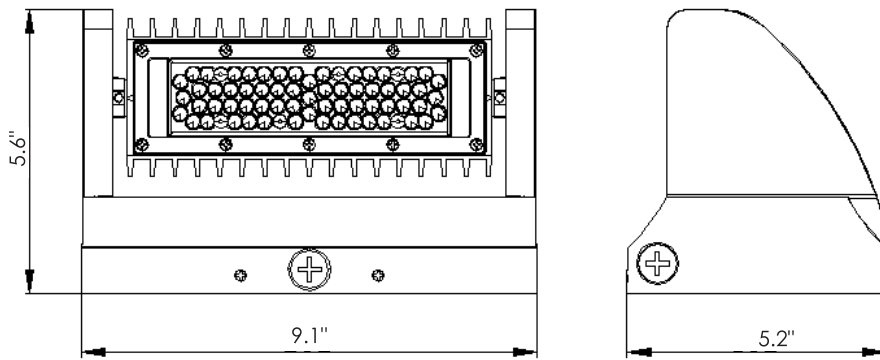

SNC-RWP02-80W

DATA OF LAMP		PHOTOMETRIC DATA Eff: 134.11 lm/W			
MODE		I _{max} (cd)	9471	S/MH (C0/180)	0.96
NOMINAL POWER (W)	80	LOR (%)	100.0	S/MH (C90/270)	0.86
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	10793	η UP, DN (C0-180)	0.1, 52.7
NOMINAL FLUX (lm)	10793.5	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 47.1
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	120.0	η down (%)	99.8	CIBSE SHR MAX	0.95

