




Specifications

Model No.	T05A01-40H / T05A01-50H	
OPTICAL	Input Power	27W
	Lumen	3200 LM
	Lumen Efficacy	118 LM/W
	Color Temperature	4000K / 5000K
	CRI	>80
	Beam Angle	180°
ELECTRICAL	Input Voltage	120-277VAC 50/60Hz
	PF	≥0.9
	THD	≤20%
MATERIALS	LED Type	SMD2835 (0.2W)
	LED QTY	105 PCS
	Housing	Glass +PET Film
	Cover	PET Film
	Waterproof Rating	DAMP (IP20)
OTHERS	Operating Temperature	-20°C TO 45°C
	Operating Humidity	20%-90% RH
	Storage Temperature	-30°C TO 80°C
	Storage Humidity	10%-95% RH
	Warranty Time	5 Years

LED Tube Technical Data

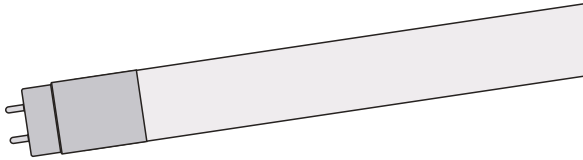

Ballast Brand	Model#	Type	QTY of working Lamps
HOWARD	EP2/54HO/PRS MV/W/MC	programmed rapid start	2-lamp
PHILIPS Advance	ICN-2S54-N	Programmed Start	2-lamp
Watran	DB-254HO-MV-TP-PS-SL	Programmed Start	2-lamp
ULTRA START	GE454MVPS90-F	Programmed Start	4-lamp
FULHAM	RHA-UNV-254-LT5	Programmed Start	2-lamp
OSRAM	QHE 4*54T5HO/UNV PSN HT SCL	programmed rapid start	4-lamp
ULTRA START	GE454MVPS90-E-S	Programmed Start	4-lamp
FULHAM	RHA-UNV-454-LT5	Programmed Start	4-lamp
Watran	BAF454PS/MV	Programmed Start	4-lamp
PHILIPS Advance	ICN-4S54-90C-2LS-G	Programmed Start	4-lamp
	ICN-2S54-T	Programmed Start	2-lamp
OSRAM	QHE 2*54T5HO/UNV PSN HT	programmed rapid start	2-lamp

NOTICE FOR USER

- Please turn off power before install or change assembly parts.
The input voltage and lamps should be matched, after connecting the power line,
- Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

TROUBLE SHOOTINGS

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies.
Out of working	Please check the connection.