

Project		Catalog #		Type	
Prepared by		Notes		Date	



Lumière

Cambria 206

LED / Halogen
Pathways

Typical Applications

- Hospitality • Commercial Landscape • Outdoor Area/Site • Residential
- Architectural

Interactive Menu

- Order Information [page 2](#)
- Cambria 206 MR16 Halogen Photometric Data [page 3](#)
- Cambria 206 LED Photometric Data [page 4](#)
- Product Warranty

Product Certification




Product Features



Top Product Features

- 340° tilt, 360° rotation
- Precision-machined aluminum, brass, bronze, copper or stainless steel
- Stainless steel hardware
- Siphon Protection System (S.P.S.)
- Holds up to three optical accessories
- Three-year warranty

Dimensions

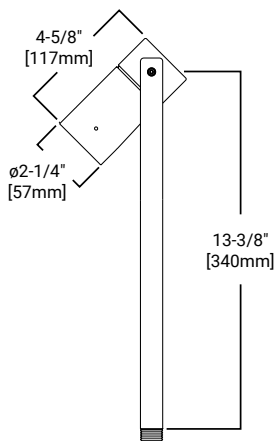

TECHNICAL DATA

Low Voltage:
50W Max Halogen MR16
8W LED, L70/60,000 hours at 25°C

Order Information

SAMPLE ORDER NUMBER: 206-8LED2710-12-CS

Domestic Preferences	Series	Source (for LED, select from each column and combine)	Voltage	Finish						
Domestic Preferences⁽¹⁾	Series	Source (for LED, select from each column and combine)	Voltage	Finish						
[Blank]=Standard BAA=Buy American Act	206=LED or MR16 Cambria Path Fixture	50MR16=50W max. Halogen MR16, GU5.3 Base	12=12V	Painted BK=Black BZ=Bronze CS=City Silver VE=Verde WT=White						
		<table border="1"> <tr> <td>8LED=8W LED</td> <td>27=2700K 30=3000K 40=4000K*</td> <td>10=10° Spot 25=25° Narrow 36=36° Wide</td> </tr> <tr> <td>5LED=5W LED</td> <td>AM=Amber (585-595nm)*</td> <td>25=25° Narrow</td> </tr> </table>	8LED=8W LED	27=2700K 30=3000K 40=4000K*	10=10° Spot 25=25° Narrow 36=36° Wide	5LED=5W LED	AM=Amber (585-595nm)*	25=25° Narrow		Premium Finish NBR=Natural Brass NCP=Natural Copper NBZ=Natural Bronze* NSS=Natural Stainless Steel
8LED=8W LED	27=2700K 30=3000K 40=4000K*	10=10° Spot 25=25° Narrow 36=36° Wide								
5LED=5W LED	AM=Amber (585-595nm)*	25=25° Narrow								
Notes (1) Only product configurations with this designated prefix are built to be compliant with the Buy American Act of 1933 (BAA). Please refer to DOMESTIC PREFERENCES website for more information. Components shipped separately may be separately analyzed under domestic preference requirements.	Notes	Notes * Not Title 20 compliant. Unless noted otherwise, lamps not included.	Notes	Notes * For natural bronze ROHS material consult factory.						

Optical Accessories - Order Separately

Filters (2.00" Diameter)	Optical Lenses (2.00" Diameter)	Optical Louvers (2.00" Diameter)
Filters (2.00" Diameter)⁽²⁾	Optical Lenses (2.00" Diameter)⁽²⁾	Optical Louvers (2.00" Diameter)⁽²⁾
F71= Peach Dichroic F72= Amber Dichroic F73= Green Dichroic F74= Medium Blue F75= Yellow Dichroic F76= Red Dichroic F77= Dark Blue Dichroic F78= Light Blue Dichroic F79= Neutral Density Dichroic F80= Magenta Dichroic F22= Red Color F33= Blue Color F44= Green Color F55= Yellow Color F66= Mercury Vapor	LSL=Linear Spread Lens (elongates standard beam spread) DIF=Diffused lens (provides even illumination) OSL=Overall Spread Lens (increases standard beam spread)	LVR=45° Hex Cell Louver (reduces glare)
Notes See Accessories & Technical Data section of Lumière catalog for Mounting Accessories. Consult your customer service representative for additional options and finishes.	Notes (2) Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.	Notes

Mounting Accessories - Order Separately

Ground Mounting
Ground Mounting⁽³⁾
GS01=1-1/2" x 6-3/4" (38mm x 171mm) cast zinc ground spike. GS03=2-3/8" x 6-5/8" (960mm x 168mm) aluminum ground spike with integral 12V wiring compartment. Specify powder paint finish (BK,BZ,CS,VE,WT) GS04=1" x 16-1/2" (25mm x 419mm) aluminum ground spike with integral 12V wiring compartment. Specify powder paint finish (BK,BZ,CS,VE,WT) GS05=1" x 16-1/2" (48mm x 438mm) black polycarbonate ground spike with 2"-13" height adjustment - requires fixture with extended stem. GS08=1-7/8" x 8" (48mm x 203mm) black ABS ground spike. GS13=3-3/4" x 4-1/2" (95mm x 114mm) brass/stainless steel 3 prong ground spike.
Notes

Product Specifications

Material

- Housing, hood and mounting stem are precision-machined from corrosion-resistant 6061-T6 aluminum billet, C360 brass, C932 bronze*, C110 copper or 303/304 stainless steel

Finish

- Fixtures constructed from 6061-T6 aluminum are double protected by an ROHS* compliant chemical film undercoating and polyester powdercoat paint finish, surpassing the rigorous demands of the outdoor environment
- A variety of standard colors are available. Brass, Bronze*, Copper or Stainless Steel Fixtures constructed from brass, bronze*, copper or stainless steel are left unpainted to reveal the natural beauty of the material. Brass, bronze* and copper will patina naturally over time

Hood

- Hood is removable for easy relamping and accepts up to three internal accessories at once (lenses, louvers, filters) to achieve multiple lighting effects
- Weep holes prevent water and mineral stains from collecting on the lens even in the straight-up position

Gasket

- Housing and hood are sealed with a high temperature silicone o-ring gasket to prevent water

intrusion

Lens

- Tempered glass lens, factory sealed with high temperature adhesive to prevent water intrusion and breakage due to thermal shock

Mounting Stem

- Model 206 includes an extended length-mounting stem and delivers 340° tilt and 360° rotation from any mounting position
- Stainless steel aim-locking mechanisms are standard
- Stem provided with 1/2 NPSM threaded base
- Lumière's exclusive Siphon Protection System (S.P.S.) prevents water from siphoning into the fixture through its own lead wires.

Hardware

- Stainless steel hardware is standard to provide maximum corrosion-resistance

Socket

- Ceramic socket with 250° C Teflon® coated lead wires and GU5.3 bi-pin base.

Electrical

- Remote 12V transformer required (not included)
- Initial power draw on LED equipped fixtures is 12

watts

- When sizing transformer use 12 watts per LED fixture
- Minimal power draw after start up is 8 watts
- LEDs are more voltage sensitive than standard halogen MR16 lamps
- The LED module is designed to operate within the range 12V +/- 1.2V. Any less or more voltage can cause premature failures

Lamp

- Halogen lamp not included
- SORAA LED modules are included
- Available in three color temperatures (2700, 3000 and 4000) or Amber (585-595nm)
- Three distributions (spot, narrow, and flood)
- Both color temperature and distribution must be specified when ordering. Soraa lamp compatible (8W Max)

Compliance

- Tested to IESNA LM-79 and LM-80


Warranty

- Lumière warrants its fixtures against defects in materials & workmanship for three (3) years. Auxiliary equipment such as transformers and lamps carry the original manufacturer's warranty. *For natural bronze ROHS material consult factory.

Cambria 206 & 206-2 MR16 Halogen Photometric Data

[View IES files](#)

Horizontal Illuminance on Surface - Cambria 206 Standard Recessed Hood - 50W MR16

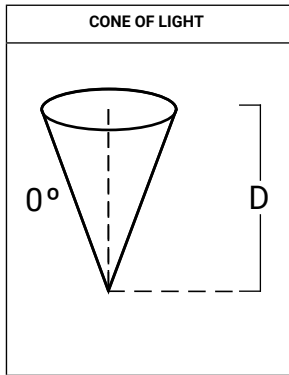

Filename	206-50MR16-12-BK-NSP.ies	
Lamp	50W MR16 NSP	
CBCP	11,000	
Distance	FC	Beam Diameter
2'	2550	1'6"
4'	638	1'0"
6'	283	1'6"
8'	159	2'0"
10'	102	3'0"
15'	45	4'0"

Filename	206-50MR16-12-BK-NFL.ies	
Lamp	50W MR16 NFL	
CBCP	3,200	
Distance	FC	Beam Diameter
2'	725	1'0"
4'	181	2'6"
6'	81	4'0"
8'	45	5'0"
10'	29	6'6"
15'	13	10'0"

CCT MULTIPLIER TABLE

LAMP WATTAGE	MULTIPLIER
20W	0.32
35W	0.57

Filename	206-50MR16-12-BK-FL.ies	
Lamp	50W MR16 FL	
CBCP	2,000	
Distance	FC	Beam Diameter
2'	431	1'6"
4'	106	3'0"
6'	48	5'0"
8'	27	6'6"
10'	17	8'0"
15'	7	12'0"

Filename	206-50MR16-12-BK-WFL.ies	
Lamp	50W MR16 WFL	
CBCP	1,200	
Distance	FC	Beam Diameter
2'	269	2'0"
4'	67	4'6"
6'	30	7'6"
8'	17	9'0"
10'	11	11'6"
15'	5	17'0"

NOTES AND FORMULAS

- Beam diameter is to 50% of maximum footcandles, rounded to the nearest half-foot.
- Footcandle values are initial. Apply appropriate light loss factors where necessary.
- Bare lamp data shown. Consult lamp manufacturers to obtain detailed specifications for their lamps.


Cambria 206 LED Photometric Data

LED Lumen and CBCP Table - 3000K

View IES files

		Flush Hood			Regressed Hood (Black)			Regressed Hood (Silver)		
		CBCP	LUMENS	LPW	CBCP	LUMENS	LPW	CBCP	LUMENS	LPW
10	BASE	5980	351.3	43.6	5541	298.5	37.1	5052	296.9	39.7
	+DIFF	985	286.9	35.8	968	220.4	27.4	930	233.2	31.2
	+LSL	1310	309.9	38.6	1299	253.1	31.4	1200	252.7	33.8
	+LVR	5270	243.0	30.6	4838	235.3	29.2	4633	225.1	30.1
	+OSL	1686	328.6	41.4	1700	285.7	35.5	1609	291.1	39
25	BASE	2690	417.2	53.5	2559	374.2	47.4	2357	361.8	49.4
	+DIFF	761	338.6	43.4	729	267.7	33.9	720	281.4	36.2
	+LSL	795	375.1	48.1	778	316.3	40.2	719	312.0	42.2
	+LVR	2396	285.9	36.7	2294	272.4	34.1	2092	253.3	35.3
	+OSL	1452	383.4	49.1	1414	345.0	43.8	1328	341.2	45.2
36	BASE	1144	409.2	53.1	1125	369.1	47.6	1080	371.7	49
	+DIFF	542	336.3	43.6	532	264.3	34.1	502	268.6	35.1
	+LSL	486	371.1	48.2	480	305.6	39.4	484	317.4	41.7
	+LVR	1030	267.9	34.8	996	252.1	32.4	967	251.8	33.1
	+OSL	930	384.3	49.9	932	337.8	43.6	910	348.6	45.7

Horizontal Illuminance on Surface - Cambria 206 Standard Recessed Hood - 4000K

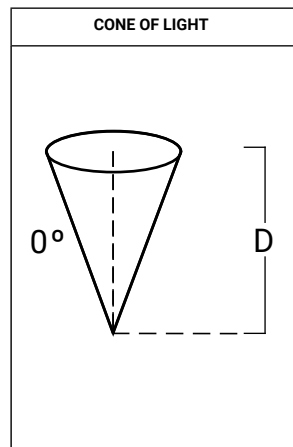

Filename: 206-SS-8LED4010-12-BK.ies			
Test No.: G2-1802-569-4			
Distance	FC	Beam Diameter	
2'	1385.2	0.4	
4'	346.3	0.8	
6'	153.9	1.2	
8'	86.6	1.6	
10'	55.4	2	
15'	24.6	3.2	
20'	13.9	4.2	
30'	6.2	6.4	
40'	3.5	8.4	

Filename: 206-SS-8LED4025-12-BK.ies			
Test No.: G2-1802-569-5			
Distance	FC	Beam Diameter	
2'	639.8	0.6	
4'	159.9	1.2	
6'	71.1	1.8	
8'	40	2.4	
10'	25.6	3	
15'	11.4	4.6	
20'	6.4	6	
30'	2.8	9.2	
40'	1.6	12.2	

Filename: 206-SS-8LED4036-12-BK.ies			
Test No.: G2-1802-569-6			
Distance	FC	Beam Diameter	
2'	281.2	1	
4'	70.3	2.2	
6'	31.2	3.4	
8'	17.6	4.6	
10'	11.2	5.8	
15'	5	8.6	
20'	2.8	11.6	
30'	1.2	17.4	
40'	0.7	23.2	

CCT MULTIPLIER TABLE

CCT (K) / COLOR	MULTIPLIER
2700K	0.91
3000K	0.89
4000K	1.00

Note: Multiplier can be used to calculate center beam candle power (CBCP), Lumens and footcandle (FC) values.

TECHNICAL INFORMATION

1. Dimming is dependant on remote transformer compatibility with LED module. Please see compatibility matrix for dimmer switch and transformer selection.
2. When using a magnetic dimmer switch there are two recommended LED compatible 120V magnetic dimming switches:
Lutron Ariadni AVLV-600P and Lutron Diva DVLV-600P
3. IMPORTANT: When sizing transformer use 12 watts per LED fixture. Nominal power draw after start up is 8 watts. Any less or more voltage can cause premature failures.