



energreetechnologies™
together committed to a greener future.

160 Don Park Road, Unit #3
Markham, ON L3R 1C3
www.energreetechnologies.com
Phone: 905-479-5999
Fax: 905-479-5997


LED Canopy Fixture (available in 45w and 65w)



Features

- Sealed die-cast for indoor/outdoor applications
- Replaces 100w-250w metal halide
- Lumen output from 4200lm-6700lm
- Polycarbonate optical lens with heat resisting
- Supports 120-277V and 347-480V input
- UL/cUL listed for wet locations, DLC listed
- Ideal for parking facilities, storage areas, etc.
- 50,000hr life span, dimming capabilities
- Available in black, bronze, and white housing

Dimensions

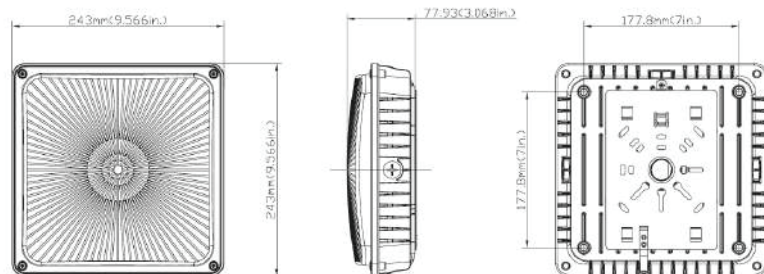


Ordering Information

Ordering Info	Wattage (w)	Input Voltage (VAC)	CCT	Initial Lumens (lm)
EGT-GFPL-45w-120V-5K	45	120-277	5000K	4200
EGT-GFPL-45w-347V-5K	45	347-480	5000K	4200
EGT-GFPL-65w-120V-5K	65	120-277	5000K	6700
EGT-GFPL-65w-347V-5K	65	347-480	5000K	6700


*all models available in 4000K by special order

45w Canopy

Luminous Intensity Distribution Curve

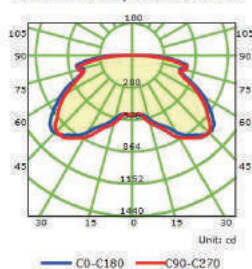


Illuminance at a Distance



65w Canopy

Luminous Intensity Distribution Curve

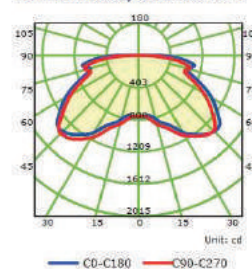

Illuminance at a Distance

