

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# WCI-L

## MINI WALL PACK

### Integrated Photocell

### ORDERING INFORMATION

**Order code:** 68311  
**Model number:** WCI-LS1-W/30K-BR  
**UPC:** 069549015890  
**Case quantity:** 10

### PHYSICAL DATA

**Dimensions:** 5.79" x 8.58" x 3.07"  
**Housing Material:** Aluminum die-cast  
**Lens type:** Polycarbonate frosted lens  
**Mounting:** Surface mount to a junction box or use with surface conduit.  
**Photocell:** Integrated 120-277 V photocell which can easily be disabled.

### PERFORMANCE DATA

**Watts (W):** 15  
**Volts (VAC):** 120-277  
**Color temperature (K):** 3 000  
**Lumen output (lm):** 1 725  
**Efficiency (lm/W):** 118  
**CRI:** 80  
**Finish:** Bronze  
**Dimming (Yes/No):** No  
**LED current (mA):** 310  
**Power factor:** 0.94  
**Frequency (Hz):** 50/60  
**THD (%):** 13  
**Operating temp. range:** -40°C to 40°C

<sup>1</sup> Typical color temperature range: +/- 5 %

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

<sup>3</sup> Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations



quick  
ship



LED  
fixture



wet  
location



ICCS  
005




Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designights.org/search](http://www.designights.org/search).


This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

**DIMENSIONS**

**FRONT**

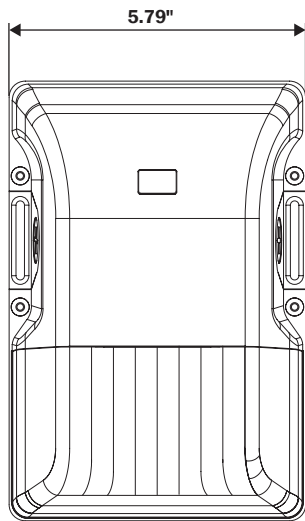


**SIDE**

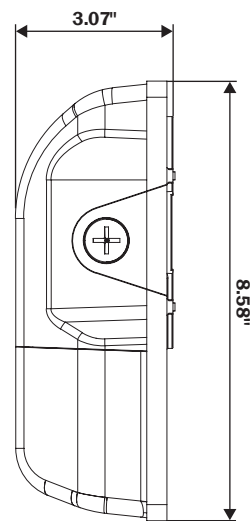

**PHOTOMETRIC DATA<sup>1</sup>**

68311 • WCI-LS1-W-30K-BR • 1 899.3 lm

**Polar candela distribution**

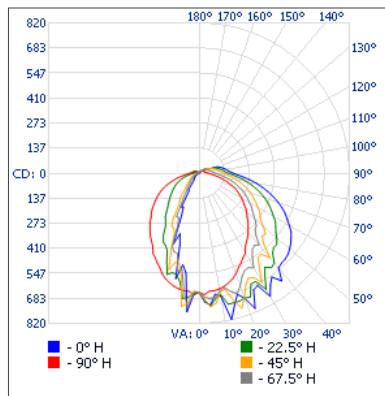

**Zonal lumen summary**

Zone	Lumens	% Luminaire
0-30	468.9	24.7%
0-40	724.6	38.2%
0-60	1 225.6	64.5%
60-90	480.5	25.3%
70-100	335.9	17.7%
90-120	153.0	8.1%
0-90	1 706.1	89.8%
90-180	193.2	10.2%
0-180	1 899.3	100%

**Illuminance at a distance**

Center beam fc		Beam width	
8.3'	9.41 fc	16.2'	16.0'
16.7'	2.33 fc	32.6'	32.1'
25.0'	1.04 fc	48.7'	48.1'
33.3'	0.58 fc	64.9'	64.1'
41.7'	0.37 fc	81.3'	80.2'
50.0'	0.26 fc	97.5'	96.2'

■ Vert. spread: 88.5°  
■ Horiz. spread: 87.8°

<sup>1</sup> Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.