



STELLA EXIT OR SORTIE COMBO


Steel Combo

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Wall, ceiling or end mounting
- Field removable chevrons
- High-output LED technology
- 20 gauge steel housing
- Up to 35W lamps
- Up to 6V-50W or 12V-72W capacity
- High-efficiency two stage charger
- Operating temperature: +10°C to +40°C
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

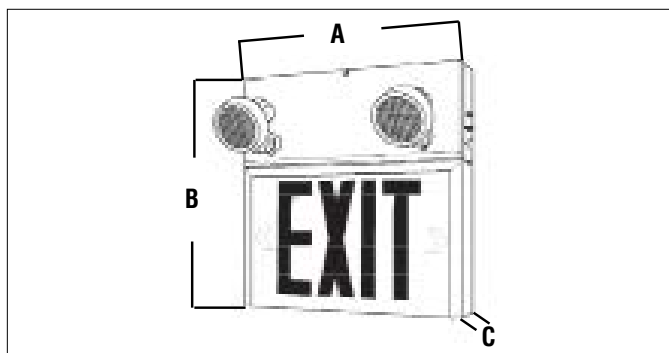

MODEL	A	B	C
SL-E	308mm (121/8")	317.5mm (121/2")	63.5mm (21/2")
SL-S	445mm (171/2")	317.5mm (121/2")	63.5mm (21/2")

EXTERNAL SPECIFICATIONS

The STELLA COMBO is constructed from durable 20 gauge steel with standard white baked powder coat finish. Available in custom finishes (please specify). Single, double or universal face versions must also be specified. Universal mounting pattern and keyhole slots are stamped into the backplate. Removable chevron arrows are standard on each fixture. Standard external LED status indicators and push button test switch. Heads are molded from high impact thermoplastic in a matching colour; SR PAR18 standard.

INTERNAL SPECIFICATIONS

SELF-POWERED: Standard versions use a valve regulated, sealed lead-acid battery to provide the emergency lighting duration as specified per unit. LED versions standard 120/347V input.

BATTERY TECHNOLOGY

The STELLA COMBO is designed with a maintenance free, valve regulated sealed lead-acid battery providing emergency lighting duration as specified per unit. Recharge time of the battery is 24 hours.

BEGHELLI AUTO-TEST (AT)

The system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 30 minute discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability.

MODEL RATING GUIDE

MODEL	VOLTAGE (OUTPUT)	WATTAGE RATING	
		30MIN	120MIN
6-36	6	36	10
6-50	6	50	15
12-36	12	36	10
12-72	12	72	22

LAMP SELECTION

	6V	12V	12V – 24V
Composite Tungsten	7.2, 9W	9, 12, 18W	N/A
Composite Quartz (Q)	6, 8, 10, 12W	12, 20 (55W PAR36 only)	N/A
MR16 (SR or BTMR)	N/A	20, 35, 50W	N/A
LED-MR16 (SR or BTMR)	5, 7W	2, 5, 7W	5W
LED Module	3, 4W	3, 4W	N/A
Sealed Beam LED (PAR36)	N/A	6W	N/A

* MR16 max 12W in SR head

ORDERING GUIDE

SERIES	WATTS	LIGHT SOURCE	LETTER COLOUR	FACE#	MOUNTING	HEADS	LAMP	OPTIONS
SL-E (Exit)	6-36 6-50	L (LED)	R (Red)	1 (Single) 2 (Double)	W (Wall) C (Ceiling)	0 (None) 1SR (PAR18 small, one head) 2SR (PAR18 small, two heads) 1LR (PAR36 large, one head) 2LR (PAR36 large, two heads) BTMR1 (MR16, one head) BTMR2 (MR16, two heads)	See lamp selection	NC (Ni-Cd batteries, see guide) CC (Custom colour - specify) TD (10 min. time delay) WG (Wireguard) PK12 (12" pendant kit) AT (Auto-test, SP only) TP (Tamper proof screws) SM (Side mounted heads)
SL-S (Sortie)	12-36 12-72			U (Universal)				

NOTE: ¹ Specify AC input voltage



STELLA EXIT OR SORTIE COMBO

Steel Combo

PRE-BUILT INVENTORY

ORDERING CODE	SHORT DESCRIPTION	LONG DESCRIPTION
10203001	SLE636LRU-2SR9W-120277347V	STELLA COMBO UNIT 6V 36W FOR 30 MIN RED LED UNIVERSAL FACE UNIVERSAL MOUNT 2 PAR18 HEADS 9W LAMPS WHITE FINISH 120277347V INPUT
10204001	SLS636LRU-2SR9W-120277347V	STELLA COMBO UNIT SORTIE 6V 36W FOR 30 MIN RED LED UNIVERSAL FACE UNIVERSAL MOUNT 2 PAR18 HEADS 9W LAMPS WHITE 120347V INPUT