

## TEW 600V

PVC

### SPECIFICATIONS

- CSA FT1
- UL 1015
- Vertical Wire Flame Test

\*Refer to CE Code for details



### CONSTRUCTION


**Conductor:** Stranded bare copper

**Insulation:** Polyvinyl Chloride (PVC)

**Conductor Temperature:** -20°C to +105°C

**Options:** Other coloured outer jackets and striping available upon request

Tinned copper conductor available upon request

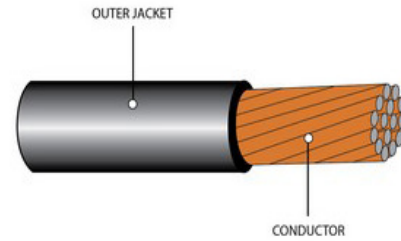

Part Number	No. of Cond.	AWG Size		Insulation Thickness		Approximate Diameter		Net Weight	
		Cond.	Stranding	in.	mm	in.	mm.	LB/ MFT	KG/KM
10002-02-010	1	22	7 x 30	0.030	0.762	0.092	2.337	6	9
10005-03-010	1	20	10 x 30	0.030	0.762	0.100	2.540	7	10
10005-04-010	1	18	16 x 30	0.030	0.762	0.109	2.769	10	15
10005-05-010	1	16	26 x 30	0.030	0.762	0.121	3.073	14	21
10005-06-010	1	14	41 x 30	0.030	0.762	0.136	3.454	19	28
10005-07-010	1	12	65 x 30	0.030	0.762	0.156	3.962	27	40
10005-08-010	1	10	104 x 30	0.030	0.762	0.181	4.597	43	64
10005-10-010	1	8	168 x 30	0.030	0.762	0.243	6.172	68	101

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.  
Specifications are subject to change without prior notice.

\* Refer to CEC for Ampacity.