


TRAYCONTROL® 600-C

flexible, oil resistant, screened, open installation (TC-ER), NFPA 79,
EMC-preferred type

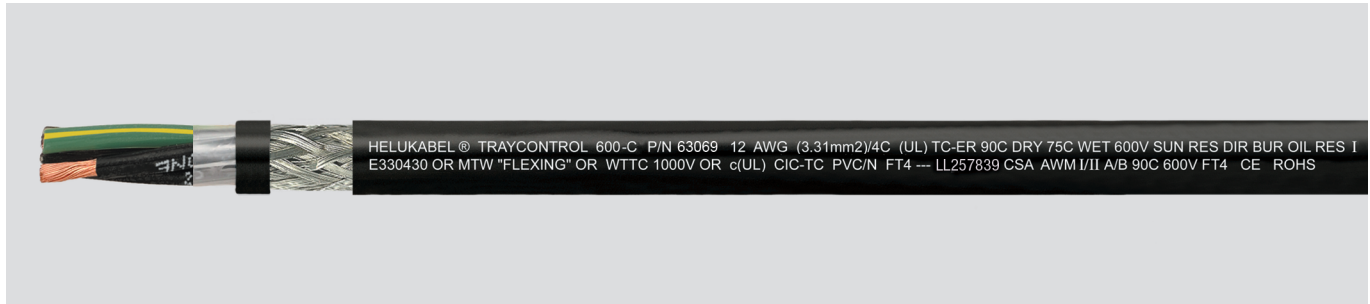

Technical data

- PVC power cable acc. to UL Std.1277 and UL Std.2277
- **Temperature range**
UL/CSA TC -40°C to +90°C
AWM -40°C to +90°C
- **Nominal voltage**
TC 600 V
AWM 1000 V
WTTC 1000 V
- **Test voltage**
3000 V
- **Coupling resistance**
max. 250 Ohm/km
- **Minimum bending radius**
6x cable Ø
- **Insulation resistance**
min. 20 MOhm x km
- **Radiation resistance**
up to 80x10⁶ cJ/kg (up to 80 Mrad)

Cable structure

- Bare copper conductor, fine wire with AWG dimensions
- Core insulation of special PVC with transparent nylon skin
- Core identification to DIN VDE 0293 black cores with continuous white numbering
- GN-YE conductor, 3 cores and above in the outer layer
- Cores stranded in layers with optimal lay length
- Separating foil
- Braided screening of tinned copper wires, coverage approx. 85%
- Separator
- Outer sheath of special PVC
- Sheath colour: black (RAL 9005)
- With length marking in feet

Properties

- The materials used during manufacturing are cadmium-free, contain no silicone and are free from substances harmful to the wetting properties of lacquers
- UV resistant

Tests

- Self-extinguishing and flame retardant acc. to CSA FT4
- **UL:**
TC-ER, PLTC-ER (AWG 18 - AWG 12), ITC-ER (AWG 18 - AWG 12), UL Type WTTC, UL Type MTW NFPA 79, Oil Res I (Oil Res II also available), 90°C dry / 75°C wet, Class 1 Div. 2 per NEC Art. 336, 392, 501
- **CSA:**
c (UL) CIC-TC FT4, CSA AWM I/II A/B FT4

Note

Advantages

- TC-ER, Tray Cable Exposed Run
- Simple installation
- Outstanding flexibility

Application

USA NFPA 79 compliant, screened, flexible power cable to 600 V (WTTC 1000 V), for all tool and plant construction machinery, suitable for installation in dry, damp and wet environments, outdoors and in pipes. For underground installation and for open, unprotected installation from the cable tray to the machine and industrial plants.

EMC = Electromagnetic compatibility

To optimize the EMC features we recommend a large round contact of the copper braiding on both ends.

CE = Product conforms with Low-Voltage Directive 2014/35/EU.

Part no.	Cross-section mm ²	No. cores x AWG-No.	Outer Ø app. mm	Cop. weight kg / km	Weight app. kg / km
63049	0,963	3 x 18	8,2	31,0	118,0
63050	0,963	4 x 18	8,8	52,0	136,0
63051	0,963	5 x 18	9,4	62,0	149,0
63052	0,963	7 x 18	10,1	83,0	193,0
63053	0,963	12 x 18	12,9	143,0	328,0
63054	0,963	18 x 18	15,7	207,0	431,0
63055	0,963	25 x 18	17,7	284,0	569,0
62997	1,31	3 x 16	8,9	57,0	144,0
63056	1,31	4 x 16	9,6	72,0	172,0
63057	1,31	5 x 16	10,3	84,0	186,0
63058	1,31	7 x 16	11,3	124,0	243,0
63059	1,31	12 x 16	15,1	199,0	421,0
63060	1,31	18 x 16	17,3	290,0	510,0
63061	1,31	25 x 16	19,6	384,0	704,0
63062	2,08	3 x 14	9,8	85,0	178,0
63063	2,08	4 x 14	10,7	115,0	220,0

Part no.	Cross-section mm ²	No. cores x AWG-No.	Outer Ø app. mm	Cop. weight kg / km	Weight app. kg / km
63064	2,08	5 x 14	11,6	139,0	264,0
63065	2,08	7 x 14	12,5	185,0	325,0
63066	2,08	12 x 14	16,9	309,0	591,0
63067	2,08	18 x 14	19,5	448,0	780,0
63068	2,08	25 x 14	23,3	632,0	1041,0
63069	3,31	4 x 12	12,2	179,0	313,0
63070	3,31	5 x 12	13,4	223,0	384,0
63071	3,31	7 x 12	15,5	298,0	492,0
63072	5,26	4 x 10	15,5	256,0	547,0
63073	5,26	5 x 10	16,8	312,0	608,0
63074	5,26	7 x 10	18,2	430,0	850,0
63075	8,37	4 x 8	19,9	426,0	851,0
63076	13,3	4 x 6	23,3	657,0	1197,0
63077	21,2	4 x 4	28,6	1026,0	1970,0
63078	33,6	4 x 2	33,2	1412,0	2874,0

Dimensions and specifications may be changed without prior notice. (RN01)