



## HEAVY DUTY SUPPORT GRIPS


Heavy Duty Support Grips are designed to withstand greater loads and increased stress. The mesh is also available in stainless steel or as single weave.

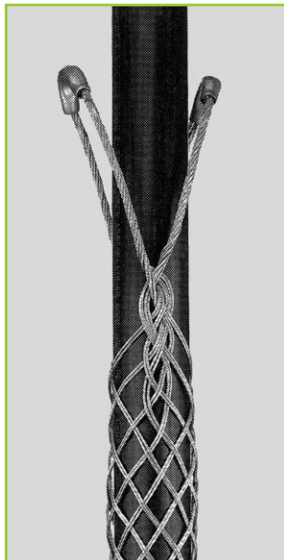

Cable Range	Part #	Description	Approx.* Breaking Strength	Length	
				Eye	Mesh
<b>Single Eye – Closed Mesh – Double Weave</b>					
.75- .99	<b>2206-001</b>	P075-SE	2700	10	26
1.00-1.24	<b>2206-002</b>	P100-SE	4720	10	29
1.25-1.49	<b>2206-003</b>	P125-SE	4720	10	31
1.50-1.99	<b>2206-004</b>	P150-SE	4720	10	35
<b>Double Eye – Closed Mesh – Double Weave</b>					
.75- .99	<b>2206-006</b>	P075-DE	2700	10	26
1.00-1.24	<b>2206-007</b>	P100-DE	4720	10	29
1.25-1.49	<b>2206-008</b>	P125-DE	4720	10	31
1.50-1.99	<b>2206-009</b>	P150-DE	4720	10	35
2.00-2.49	<b>2206-010</b>	P200-DE	10080	10	37
2.50-2.99	<b>2206-011</b>	P250-DE	10080	10	39
3.00-3.49	<b>2206-012</b>	P300-DE	10080	10	41
3.50-3.99	<b>2206-013</b>	P350-DE	13120	10	45
4.00-4.49	<b>2206-014</b>	P400-DE	13120	10	47



Single Eye

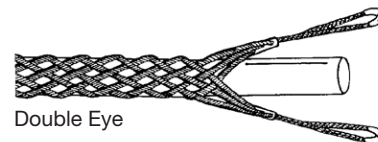

Double Eye

## WIDE RANGE STRAIN RELIEF GRIPS

Strain Relief Grips are used on cable to prevent pull-out, damage resulting from flexing and to control arc of bend. Grips are made with a single weave, galvanized steel mesh and aluminum fittings. A gasket is used to provide a seal from dust, filings and other foreign material.

G



Cable Range	Part #	Description	Fitting Thread Size	Mesh Length
<b>Insulated – NPT Thread</b>				
.22- .32	<b>7303-001</b>	SR-022	1/2"	3-1/4"
.30- .43	<b>7303-002</b>	SR-030	1/2"	3-1/4"
.40- .54	<b>7303-003</b>	SR-040	1/2"	4-3/4"
.52- .73	<b>7303-004</b>	SR-052	3/4"	5-3/4"
.70- .97	<b>7303-005</b>	SR-070	1"	7"
.94-1.25	<b>7303-006</b>	SR-094	1-1/4"	9"
1.20-1.50	<b>7303-014</b>	SRP-120	1-1/2"	11-3/4"
1.50-1.70	<b>7303-015</b>	SRP-140	2"	13-1/4"
1.70-2.00	<b>7303-016</b>	SRP-162	2-1/2"	13-1/2"
2.00-2.45	<b>7303-017</b>	SRP-200	2-1/2"	13-3/4"

