

# PG TYPE NYLON CORD GRIPS



**Material:** PA (NYLON), UL 94  
**Hermetic seal:** NBR  
**Protection degree:** IP68, 5 Bar, IP69K  
**Working temperature:** -40°C to 100°C in static state  
 Instantaneous heat resistance up to 120°C  
 -20°C to 80°C in dynamic state  
 Instantaneous heat resistance up to 100°C  
**Colour:** Grey, Black

RoHS IP68 TÜV IP69K  
PRODUCT SERVICE

US  
 LISTED  
 E360400

US \*  
 UL FILE NO.: E360400

UL F1   
 In Black colour only

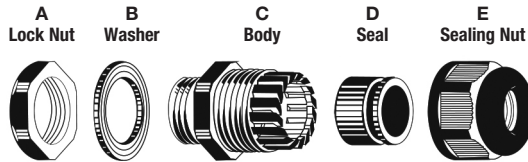

Techspan Part No. Black	Techspan Part No. Grey	AG	Inch	H		GL				Package Qty.
				mm	inch	mm	inch	mm	inch	
RDC07AA*	RDC07AA-GR*	PG 7	.11 - .26	21	.827	15	.591	15	.591	200
RDC07AR*	RDC07AR-GR*	PG 7	.07 - .20	21	.827	15	.591	15	.591	200
RDC09AA*	RDC09AA-GR*	PG 9	.15 - .32	21	.827	15	.591	19	.748	125
RDC09AR*	RDC09AR-GR*	PG 9	.07 - .24	22	.866	15	.591	19	.748	125
RDC11AA*	RDC11AA-GR*	PG 11	.19 - .39	25	.984	15	.591	22	.866	100
RDC11AR*	RDC11AR-GR*	PG 11	.11 - .28	25	.984	15	.591	22	.866	100
RDC13AA	RDC13AA-GR	PG 13,5	.23 - .47	27	1.063	15	.591	24	.945	50
RDC13AR	RDC13AR-GR	PG 13,5	.19 - .35	27	1.063	15	.591	24	.945	50
RDC16AA	RDC16AA-GR	PG 16	.39 - .56	28	1.102	15	.591	27	1.063	50
RDC16AR	RDC16AR-GR	PG 16	.27 - .47	28	1.102	15	.591	27	1.063	50
RDC21AA	RDC21AA-GR	PG 21	.51 - .71	31	1.220	15	.591	33	1.299	50
RDC21AR	RDC21AR-GR	PG 21	.35 - .63	31	1.220	15	.591	33	1.299	50
RDC29AA	RDC29AA-GR	PG 29	.70 - .98	39	1.535	15	.591	42	1.654	20
RDC29AR	RDC29AR-GR	PG 29	.47 - .79	39	1.535	15	.591	42	1.654	20
RDC36AA	RDC36AA-GR	PG 36	.87 - 1.26	48	1.890	18	.710	53	2.087	8
RDC36AR	RDC36AR-GR	PG 36	.79 - 1.02	48	1.890	18	.710	53	2.087	8
RDC42AA	RDC42AA-GR	PG 42	1.26 - 1.50	49	1.929	18	.710	60	2.362	6
RDC42AR	RDC42AR-GR	PG 42	.98 - 1.22	49	1.929	18	.710	60	2.362	6
RDC48AA	RDC48AA-GR	PG 48	1.46 - 1.73	49	1.929	18	.710	65	2.560	5
RDC48AR	RDC48AR-GR	PG 48	1.14 - 1.38	49	1.929	18	.710	65	2.560	5



G