

	THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.
--	----------------------------------------------------------------------------------------------------------------------------

	2 COPT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USE			
Material	High Conductivity Seamless Copper Tube			
Plating	Electro-Tin			
Wire Size	14 - 10 AWG STR, 12 - 10 AWG SOL			
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric			
Wire Strip Length	7/16 in.			
Stud Size	1/4 in.			
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.			
UL Temperature Rating	90° C			
C.S.A Certified Wire Connector	Yes			
Panduit Color Code on Barrel	N/A			
Panduit Die Index No. on Barrel	N/A			
Alternate Industry Die Index No. ( ) on Barrel	N/A			





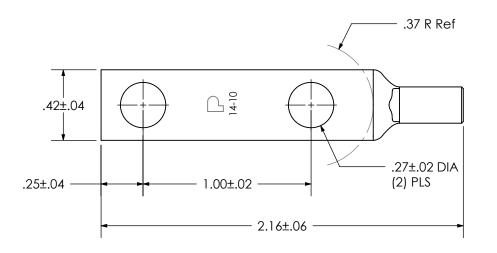

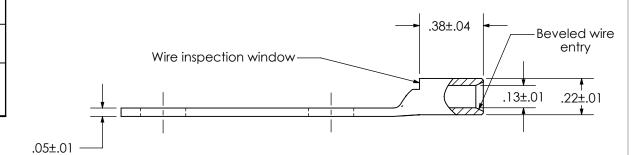

						CORP. TINLEY PARK, ILLINO
						LCD10-14D-L
01	12/04	JHNU	JHNU	REVISED WIRE SIZE	12305	Copper Lug - Two-Hole, Standard Barrel
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCD10-14D-CUST