

ORDERING INFORMATION

Order code: 10426
 Description: F13T8/CW/PH/G13/STD
 UPC: 69549104266
 Case quantity: 48




Nominal length : 12 in. (305 mm) Dia. : 1 in. (26 mm)

PERFORMANCE DATA


Shape:	T8
Base:	G13 (Med Bipin)
Starting method:	Preheat Start (PH)
Wattage (W):	13
Colour temperature (K):	4 100
CRI:	62
Rated life on IS ¹ ballast:	
Based on a 3 hour start	6 000
Based on a 12 hour start	7 500
Initial lumens (lm):	530
Mean lumens (lm):	498
Nominal efficiency (lm/W):	41
TCLP compliant:	N/A
Phosphor composition:	Triphosphor
Nominal lamp operating frequency (Hz):	60
² Minimum starting temperature (°C):	-10

DIMENSIONS

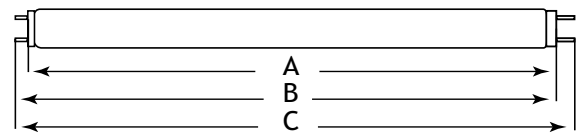

A Max	B Min / B Max	C Max
Base face to base face	Base face to end of opposite face pin	End of base pin to the end of opposite end
11.35 in.	11.53 in./11.62 in.	11.90 in.
288.3 mm	293.0 mm/295.4 mm	302.5 mm

DIMENSIONS

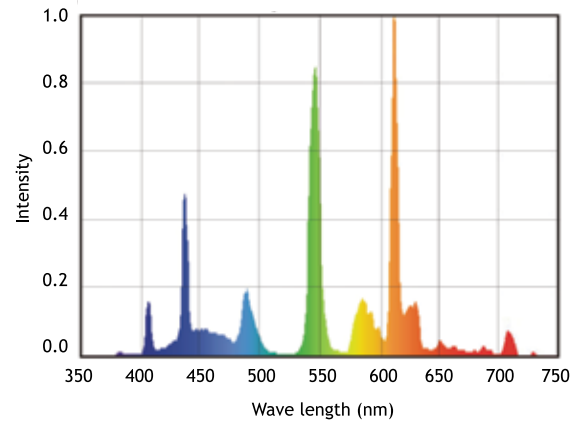

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T8 ballast.

