


HID Lamps

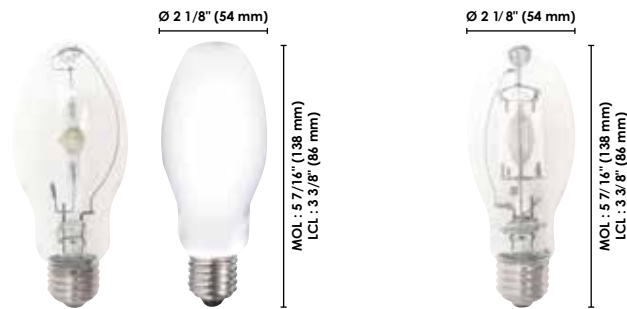

BD17

EDX17

| Order code | Description | Watts (W) | Base | Shape | Colour temp. (K) | ANSI code | CRI | Life L70 (hrs) | Lumen output (lm) | Mean lumens (lm) | Burn pos. | Finish | Luminaire | Case qty (master) |
|--------------------|--------------------------|-----------|------|-------|------------------|-----------|-----|----------------|-------------------|------------------|-----------|--------|-----------|-------------------|
| Pulse Start | | | | | | | | | | | | | | |
| 58514 | MH70W/C/U/PS/ELUME | 70 | E26 | BD17 | 3 700 | M98 | 70 | 15 000 | 5 300 | 3 400 | U | Coated | E | 24 |
| 58517 | MH100W/C/U/PS/ELUME | 100 | E26 | BD17 | 3 700 | M90 | 70 | 15 000 | 8 500 | 5 500 | U | Coated | E | 24 |
| 58521 | MP150/U/UVS/PS/740/ELUME | 150 | E26 | EDX17 | 4 000 | M102 | 65 | 15 000 | 13 300 | 10 000 | U | Clear | O | 24 |

E = Enclosed O = Open

Fluorescent Lamps



| Order code | Description | Watts (W) | Base | Colour temp. (K) | CRI | Rated life IS 3-12 hrs ² | Lumen output (lm) | Mean lumens (lm) | Nominal length (in.) (mm) | Efficacy (lm/W) | Case qty (master) |
|-------------------------|-----------------------|-----------|-----------|------------------|-----|-------------------------------------|-------------------|------------------|---------------------------|-----------------|-------------------|
| T8 Preheat Start | | | | | | | | | | | |
| 56514 ¹ | F15T8/CW/PH/G13/ELUME | 15 | Med Bipin | 4 100 | 62 | 6 000-7 500 | 610 | 573 | 18 457 | 41 | 48 |
| 56515 ¹ | F15T8/DL/PH/G13/ELUME | 15 | Med Bipin | 6 500 | 72 | 6 000-7 500 | 560 | 526 | 18 457 | 37 | 48 |

| Order code | Description | Watts (W) | Base | Colour temp. (K) | CRI | Rated life IS 3-12 hrs ² | Rated life PS/PRS 3-12 hrs ² | Lumen output (lm) | Mean lumens (lm) | Nominal length (in.) (mm) | Efficacy (lm/W) | Case qty (master) |
|------------------------------------|-------------------------------|-----------|-----------|------------------|-----|-------------------------------------|---|-------------------|------------------|---------------------------|-----------------|-------------------|
| T8 800 Series - Rapid Start | | | | | | | | | | | | |
| 62513 ¹ | F32T8/35K/8/RS/G13/ELUME/BULK | 32 | Med Bipin | 3 500 | 85 | 24 000-30 000 | 40 000-42 000 | 3 050 | 2 900 | 48 1 220 | 95 | 25 |
| 62514 ¹ | F32T8/41K/8/RS/G13/ELUME/BULK | 32 | Med Bipin | 4 100 | 85 | 24 000-30 000 | 40 000-42 000 | 3 000 | 2 850 | 48 1 220 | 94 | 25 |
| 62515 ¹ | F32T8/50K/8/RS/G13/ELUME/BULK | 32 | Med Bipin | 5 000 | 85 | 24 000-30 000 | 40 000-42 000 | 2 950 | 2 800 | 48 1 220 | 92 | 25 |
| 62516 ¹ | F32T8/65K/8/RS/G13/ELUME/BULK | 32 | Med Bipin | 6 500 | 85 | 24 000-30 000 | 40 000-42 000 | 2 900 | 2 750 | 48 1 220 | 91 | 25 |

¹TCLP compliant
²Based on a 3 hour and 12 hour start
 IS=Instant Start ballast PS=Program Start ballast PRS=Program Rapid Start ballast