
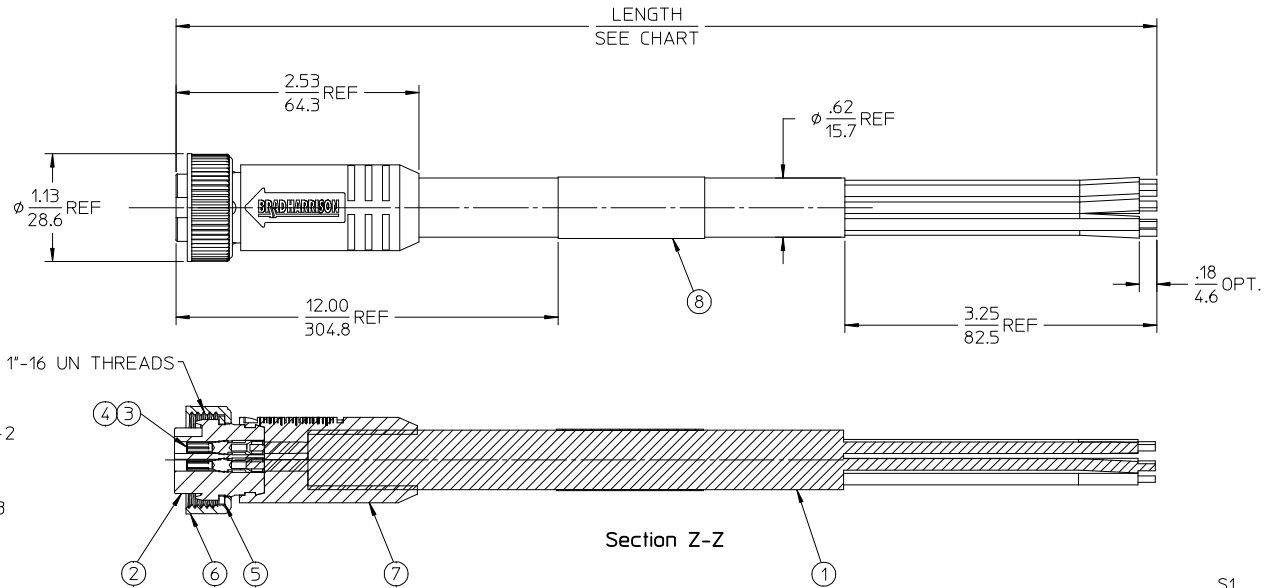


PART NUMBER	ENGINEERING NO.	LENGTH
1300070139	208000A01F030	3' 0" +1.75 - 0 [ .9M +44.5 - 0 ]
1300070142	208000A01F060	6' 0" +2.19 - 0 [ 1.8M +55.6 - 0 ]
1300070145	208000A01F120	12' 0" +3.50 - 0 [ 3.7M +88.9 - 0 ]
1300070149	208000A01F200	20' 0" +6.50 - 0 [ 6.1M +165.1 - 0 ]

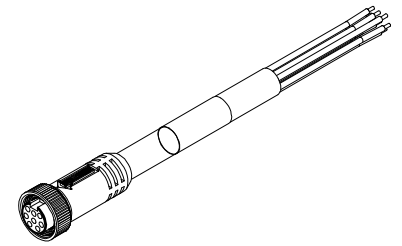

- NOTES:
1. MATERIAL: SEE TABLE
  2. FINISHES: SEE TABLE
  3. CABLE ASSEMBLIES ARE BAGGED SEPERATELY IN POLY BAGS WITH BARCODE LABEL ATTACHED TO OUTSIDE OF BAG
  4. WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
  5. MATES WITH: MINI CHANGE, B-SIZE 8 POLE RECEPTACLE
  6. ELECTRICAL SPECIFICATIONS:  
VOLTAGE RATING: 600V  
CURRENT RATING: 7 AMPS
  7. ASSEMBLY IS RoHS COMPLIANT

S1	
1	ORANGE
2	BLUE
3	WHITE/BLACK
4	BLACK
5	WHITE
6	RED
7	GREEN/YELLOW
8	RED/BLACK

WIRING DIAGRAM

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
8	1	LABEL	PLASTIC FILM	BLACK/YELLOW
7	1	OVERMOLD	PVC	YELLOW
6	1	COUPLING NUT	ZIN DIE CAST	BLACK
5	1	FRICION RING	NYON	NATURAL
4	8	SOCKET CONTACT	BRASS	GOLD PLATED
3	8	SOCKET SLEEVE	STAINLESS STEEL	
2	1	INSERT, FEMALE, 8 POLE	PVC	YELLOW
1	1	CABLE, 16-8 ST00W/ST	PVC JACKET	YELLOW

RELEASED	EC NO: MNA2009-0795	QUALITY SYMBOLS
DRWN:BRUPERT	2009/06/02	▽=0
CHKD:BRUPERT		▽=0
APPR:J.MURPHY	2009/06/10	
DESCRIPTION		

GENERAL TOLERANCES (UNLESS SPECIFIED)	
4 PLACES ±	mm
3 PLACES ±	INCH
2 PLACES ±	±.01
1 PLACE ±	±0.3
ANGULAR ±1/2°	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	
IN/MM	
DRAWN BY	DATE
BRUPERT	2009/04/02
CHECKED BY	DATE
B. WOODMAN	2009/04/03
APPROVED BY	DATE
J. MURPHY	2008/04/06
MATERIAL NO.	
SEE CHART	

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
1:1	INCH	☉
TITLE		
MINI-CHANGE CORD ASSY FEMALE, B-SIZE 8 POLE		
MOLEX INCORPORATED		
DOCUMENT NO.	SHEET NO.	
SD-130007-006	1 OF 1	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		