


ORDERING INFORMATION

Order code: 10118
 Description: BMH0250/QUADTAP/C/CWA/H/K/STD
 UPC: 69549101180



SPECIFICATIONS

Ballast type: Magnetic metal halide
 Ballast style: Core and coil
 Circuit type: CWA
 ANSI code: M58
 Input voltage (V): 120/208/240/277
 Input frequency (Hz): 60
 Line volt regulation: $\pm 10\%$
 Line watt regulation: $\pm 10\%$
 Insulation class: H (180°)

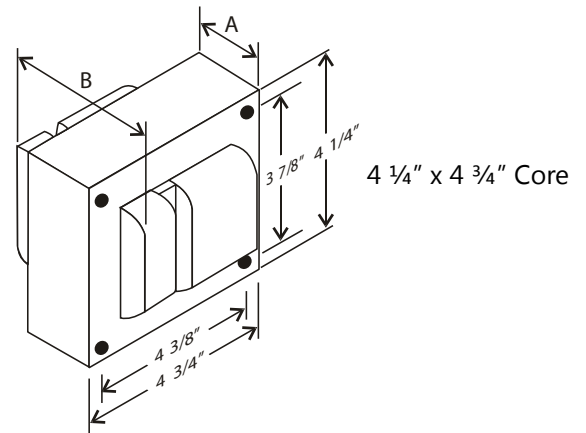

Input voltage (V)	Operating current (A)	Open circuit current (A)	Starting current (A)	Rated lamp watts (W)	Input watts (W)	OCV (V)	Dropout voltage (V)	UL 1029 code	Fuse rating (A)	Input current (A)	Power factor	Starting temperature
120	2.40	2.11	1.79	250	284	307	60	A	8	1.20 - 1.75	0.90	-20°F / -30°C
208	1.41	1.23	1.93	250	284	307	104	A	5	0.68 - 1.05	0.90	-20°F / -30°C
240	1.22	1.07	0.92	250	284	307	120	B	4	0.61 - 0.90	0.90	-20°F / -30°C
277	1.06	0.94	0.95	250	284	307	140	A	3	0.50 - 0.77	0.90	-20°F / -30°C

HIGH POTENTIAL TEST (V)


1 minute:	2 000
2 seconds:	2 500
OCV test:	280 - 340
Short circuit:	2.20 - 2.70

BALLAST DIMENSIONS


Dimension A:	1.65"
Dimension B:	3.54"
Lead Lengths:	12.00"
Weight (lbs):	8.50

WIRING DIAGRAM

Ground ballast core

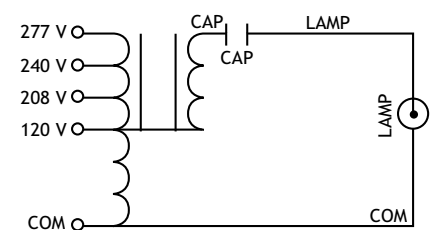

BRACKET

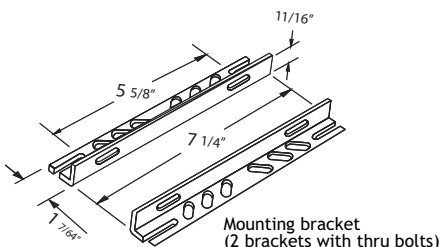

CAPACITOR

