
TECHNICAL INFORMATION BULLETIN ELECTRONIC SIGN BALLAST INSTANT START


ORDERING	INFORMATION	GENERAL INFOR	MATION
Order code: Description: UPC: Warranty:	61019 ESB/34/432/UV/STD 69549610194 3 years	Ballast type: Starting method: Lamp connection: Input voltage: Input frequency:	Electronic Plastic Sign Instant Start Parallel 120-277 V 50/60 HZ
		Max. Case Temp: OCV: Safety approval:	90 °C 860 V 61019 CUUS

Lamp type	Nun of la	nber mps		mp tage	Volts	Min. start temp	Max. input current	Max. input power	Max. THD	Power factor
	Min.	Max.	Min.	Max.	(V)	(°F / °C)	(A)	(W)		
T12/HO	2	4	4'	32'	120	-20/-29	2.40	247	10	0.00
112/110	3	4	4	32	277 -20/-29	1.00	267	10	0.90	
T8/HO	2	4	4'	24,	120	-20/-29	2.20	244	10	0.90
10/HU	3	4	4	24'	277	-20/-29	0.90	242	10	0.90


Ballast operates three or four T12HO lamps up to 8 feet long with total lamp length between 4 and 32 feet. Ballast operates three or four T8HO lamps up to 6 feet long with total lamp length between 4 and 24 feet.

WIRING DIAGRAM






HOT SPOT LOCATION

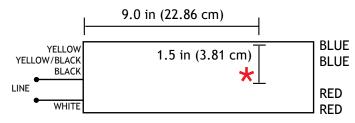

LEAD LENGTHS		
Lead colour	in.	cm
Black	24	61.0
White	24	61.0
Blue	120	304.8
Red	120	304.8
Yellow	120	304.8
Yellow/Black	120	304.8

BALLAST	FEATURE	S	
Length (L)	Width (W)	Height (H)	Mounting (M)
29.59 cm	8.00 cm	4.70 cm	27.94 cm
11.65 in	3.15 in	1.85 in	11.00 in



WARRANTY:

Ballast warranty of 5 years for electronic ballast 70 °C. Ballast warranty of 3 years for electronic ballast 90 °C. For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



www.standardpro.com