


ORDERING INFORMATION

Order code: 62932
 Description: BMH0150/TRITAP/C/HX/H/K/STD
 UPC: 69549629325

SPECIFICATIONS

Ballast type: Magnetic metal halide
 Ballast style: Core and coil
 Circuit type: HX-HPF
 ANSI code: M102
 Input voltage (V): 120/277/347
 Input frequency (Hz): 60
 Line volt regulation: $\pm 5\%$
 Line watt regulation: $\pm 10\%$
 Insulation class: H (180)



3" x 4" Core



Input voltage (V)	Operating current (A)	Open circuit current (A)	Starting current (A)	Rated lamp watts (W)	Input watts (W)	OCV (V)	Dropout voltage (V)	UL 1029 code	Fuse rating (A)	Input current (A)	Power factor	Starting temperature
120	1.60	3.65	1.70	150	188	260	90	D	9	1.20 - 1.85	0.90	-20 °F / -30 °C
277	0.70	1.55	0.60	150	188	260	208	D	4	0.50 - 0.85	0.90	-20 °F / -30 °C
347	0.55	1.25	0.45	150	188	260	260	D	4	0.45 - 0.70	0.90	-20 °F / -30 °C


HIGH POTENTIAL TEST (V)

1 minute:	2 000
2 seconds:	2 500
OCV test:	230 - 280
Short circuit:	2.05 - 2.55


BALLAST DIMENSIONS

Dimension A:	2.32"
Dimension B:	2.95"
Lead lengths:	12.00"
Weight:	6.39 lbs


WIRING DIAGRAM

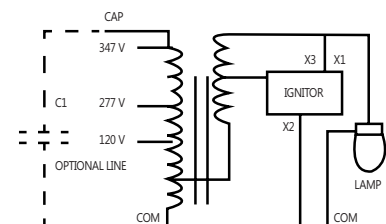

BRACKET

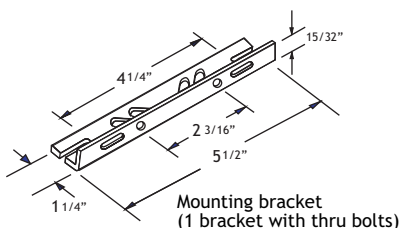

CAPACITOR

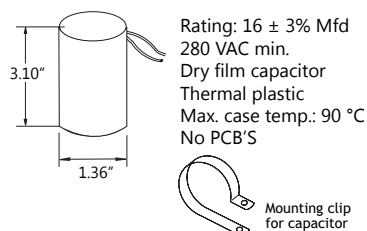

IGNITOR

