
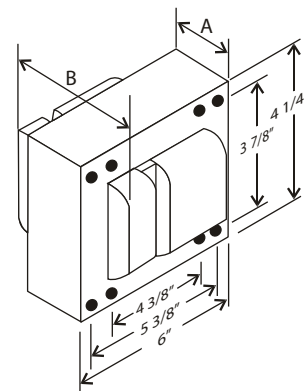


## ORDERING INFORMATION

**Order code:** 62935  
**Description:** BMH1000/TRITAP/C/CWA/H/K/STD  
**UPC:** 069549629356

## SPECIFICATIONS

**Ballast type:** Magnetic metal halide  
**Ballast style:** Core and coil  
**Circuit type:** CWA  
**ANSI code:** M47 or H36  
**Input voltage (V):** 120/277/347  
**Input frequency (Hz):** 60  
**Line volt regulation:** 10 %  
**Line watt regulation:** 10 %  
**Insulation class:** H (180)  
**Ballast to lamp distance (BTL):** 2 m

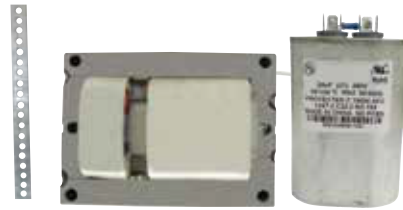

4 1/4" x 6" Core



Input voltage (V)	Operating current (A)	Open circuit current (A)	Starting current (A)	Rated lamp watts (W)	Input watts (W)	OCV (V)	Dropout voltage (V)	UL 1029 code	Fuse rating (A)	Input current (A)	Power factor	Starting temperature
120	8.90	4.95	6.60	1 000	1 100	415	84	E	25	3.30 - 5.10	0.90	-20°F / -30°C
277	3.90	2.30	2.85	1 000	1 100	415	194	E	10	1.40 - 2.15	0.90	-20°F / -30°C
347	3.15	1.80	2.25	1 000	1 100	415	243	D	8	1.10 - 1.70	0.90	-20°F / -30°C

## HIGH POTENTIAL TEST (V)


1 minute:	2 000
2 seconds:	2 500
OCV test:	380 - 470
Short circuit:	4.80 - 6.80

## BALLAST DIMENSIONS


Dimension A:	3.50"
Dimension B:	5.50"
Lead lengths:	12" - 14"
Weight (lbs):	23

## WIRING DIAGRAM

Ground ballast core



## BRACKET

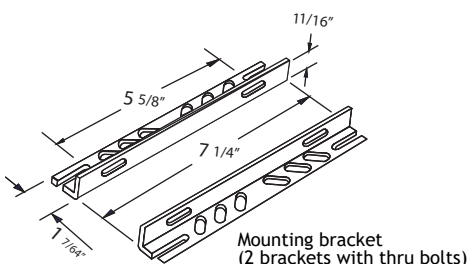

## CAPACITOR

