

# Technical Information Bulletin


## LED PL



Date: \_\_\_\_\_ Name of distributor: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_ Client #: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_ Name of end user: \_\_\_\_\_

### ORDERING INFORMATION

**Order code:** 64472  
**Description:** LED/PLVL/9W/30K/4P/ND/STD  
**UPC:** 69549644724  
**Case quantity:** 50  
**DLC unique ID:** PLYCWUXNCOQI

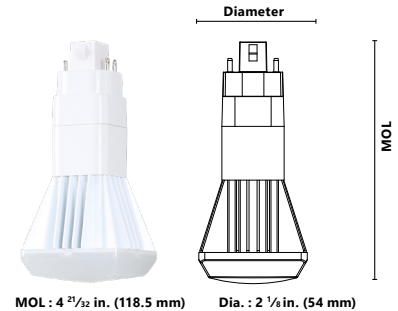


### PERFORMANCE DATA

**Shape:** PL Vertical Long  
**Base:** G24q - 4PIN  
**Watts (W):** 13  
**Starting method:** Instant & Rapid Start  
**Lamp voltage (VAC):** 120 V-277 V / 347 V  
**Color temperature (K)\*\*:** 3 000  
**Life L70 (hrs):** 50 000  
**Initial Lumens (lm)\*:** 1 043  
**Initial lumens per watt (lm/W):** 80  
**CRI:** 81  
**Beam angle (°):** 120  
**Swivel rotation (°):** 170  
**Operating temperature range:** -20°C / -4°F to 45°C / 113°F

\*Initial lumens range: +/- 10%    \*\*Typical colour temperature range: +/- 5%

LED PL Base	CFL bases replacement
G24q-13W	G24q-2, G24q-3, GX24q-2, GX24q-3

NOTE: This LED lamp is a direct replacement for the CFL bases listed above. However, this LED lamp is compatible with all G24q and GX24q CFL bases.

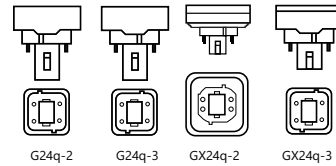

Please refer to the ballast compatibility list to confirm lamp compatibility with the existing luminaire.

### ADDITIONAL INFORMATION

Turn power off before inspection, installation, or removal.  
 Risk of electrical shock – do not use where directly exposed to water or weather.  
 Not for use in totally enclosed luminaires.  
 Do not open – no user serviceable parts inside.  
 This device is not intended for use with emergency exit fixtures or emergency exit lights.  
 Not for use with dimmers.  
 This lamp only operates on electronic ballasts. If the lamp does not light up when the luminaire is energized, remove the lamp from the luminaire and contact the lamp manufacturer or a qualified electrician.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.