

## LPDL LED 6" ROUND LOW PROFILE DOWLIGHT

LPDL™ gives you all the flexibility you need during installation, especially in confined area or when facing constraints such as wood beams, ceiling joist or air ducts. The driver is mounted separately from the light source which allows the luminaire profile to be less than 1" thick!

### FEATURES AND SPECIFICATIONS

#### • Construction

##### Finishing

- White and Brushed Nickel
- 110° beam
- 6" Round

##### Mounting

- LED module with LED driver easily installed with quick connect wire
- Torsion spring mounting clips

#### • Compliances


- cETLus
- Energy Star

#### • Technical specifications

- Phase-cut dimming
- Color temperature 3 000, 4 000 and 5 000 K
- Ambient temperature: -20°C to 45°C
- IC certified
- Suitable for damp location
- Suitable for wet location
- FT4 cable and FT6 cable for plenum
- Air tight

### OVERVIEW

Light source	LED
Watts (W)	12
Lumen output (lm)	780 - 820
Efficiency (lm/W)	65 - 69
Color temperature (K)	3 000, 4 000, 5 000
CRI	80

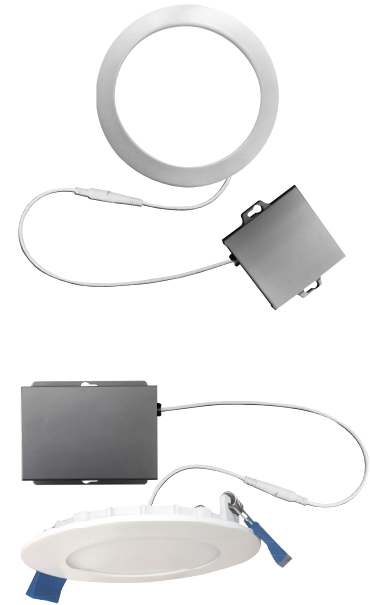

<sup>1</sup>S2- Large junction box

QUICK SHIP AND TECHNICAL SPECIFICATION TABLE 



S1 - Small junction box

Order code	Description	Watts (W)	Volts (VAC)	Color temp. (K) <sup>2</sup>	Lumen output (lm) <sup>3</sup>	Efficiency (lm/W)	CRI	Life L70 (hrs) <sup>4</sup>	Tested hours LM-80 (hrs) <sup>4</sup>	Beam angle (°)	Cable rating	Finish	Power factor	THD (%)	Traditional equivalent (W)	Case qty (master)
<b>6" Round</b>																
63864	LPDL6/RND/12W/30K/WH/STD	12	120	3 000	780	65	80	50 000	9 000	120	FT4	White	>0.9	<40	60	24
63866	LPDL6/RND/12W/30K/SLV/STD	12	120	3 000	780	65	80	50 000	9 000	120	FT4	Brushed nickel	>0.9	<40	60	24
63867	LPDL6/RND/12W/40K/WH/STD	12	120	4 000	800	67	80	50 000	9 000	120	FT4	White	>0.9	<40	60	24
63869	LPDL6/RND/12W/40K/SLV/STD	12	120	4 000	800	67	80	50 000	9 000	120	FT4	Brushed nickel	>0.9	<40	60	24

<sup>1</sup> **QUICK SHIP:** Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

<sup>2</sup> Typical color temperature range: +/- 5 %.

<sup>3</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

<sup>4</sup> Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.



S2 - Large junction box

Order code	Description	Watts (W)	Volts (VAC)	Color temp. (K) <sup>2</sup>	Lumen output (lm) <sup>3</sup>	Efficiency (lm/W)	CRI	Life L70 (hrs) <sup>4</sup>	Tested hours LM-80 (hrs) <sup>4</sup>	Beam angle (°)	Cable rating	Finish	Power factor	THD (%)	Traditional equivalent (W)	Case qty (master)
<b>6" Round Wet Location</b>																
65726	LPDL6/RND/12W/30K/WH/WET/STD	12	120	3 000	780	65	80	50 000	-	120	FT4	White	>0.9	<40	60	24
65727	LPDL6/RND/12W/40K/WH/WET/STD	12	120	4 000	800	67	80	50 000	-	120	FT4	White	>0.9	<40	60	24
<b>6" Round FT6 cable for plenum</b>																
66962	LPDL6/S2/FT6/RND/12W/30K/WH/STD	12	120	3 000	780	65	80	50 000	-	120	FT6	White	>0.9	<40	60	24
66963	LPDL6/S2/FT6/RND/12W/40K/WH/STD	12	120	4 000	800	67	80	50 000	-	120	FT6	White	>0.9	<40	60	24
<b>6" Round</b>																
65946	LPDL6/S2/RND/12W/30K/WH/STD	12	120	3 000	780	65	80	50 000	9 000	120	FT4	White	>0.9	<40	60	24
65949	LPDL6/S2/RND/12W/30K/BN/STD	12	120	3 000	780	65	80	50 000	9 000	120	FT4	Brushed nickel	>0.9	<40	60	24
65947	LPDL6/S2/RND/12W/40K/WH/STD	12	120	4 000	800	67	80	50 000	9 000	120	FT4	White	>0.9	<40	60	24
65950	LPDL6/S2/RND/12W/40K/BN/STD	12	120	4 000	800	67	80	50 000	9 000	120	FT4	Brushed nickel	>0.9	<40	60	24
65948	LPDL6/S2/RND/12W/50K/WH/STD	12	120	5 000	820	68	80	50 000	9 000	120	FT4	White	>0.9	<40	60	24

<sup>1</sup> **QUICK SHIP:** Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.


<sup>2</sup> Typical color temperature range: +/- 5 %.

<sup>3</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

<sup>4</sup> Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.

ACCESSORIES (order separately)

Order code	Description	Type	Opening diameter (in)	Case qty (master)
66822	ACC/MPLATE/6.25IN/HANG.BARS/STD	Mounting plate with hanger bars	6 1/4	25
64921	ACC/MPLATE/6.25IN/ADJ/STD	Adjustable mounting plate	6 1/4	24
64263	ACC/MPLATE/6.25IN/SQR/STD	Square mounting plate	6 1/4	96
66144	ACC/6/VAPOR BARRIER/STD	Vapor barrier extender	6 2/9	50
64264	LPDL/ACC/6FT/EXTCABLE/STD	6' Extension cord	-	96
66964	LPDL/ACC/6FT/EXTCABLE/FT6/STD	6' FT6 Extension cord	-	96

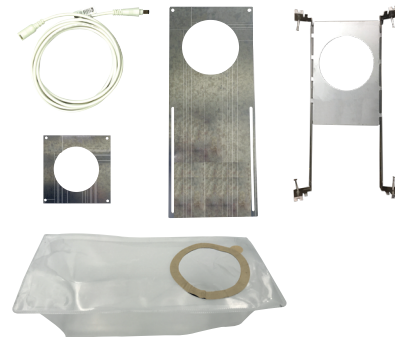


Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

**COMPATIBLE DIMMERS**

Brand	Product type & dimmer model number	
	6"	Wet location (65726-65727)
LEGRAND	HCL453P	HCL453P
COOPER	9531AW, DAL06P, SLC03P	AAL06, DAL06P, SLC03P
LEVITON	6615, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, IPL06	6615, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, IPL06
LUTRON	CTCL-153P, DVCL-153P, DVCL-253P, DVELV-300P, MACL-153P, NTELV-600, PD-6WCL, SELV-300P	AYCL-253P, CTCL-153P, DVCL-153P, DVCL-253P, DVELV-300P, MACL-153P, NTELV-600, PD-6WCL, SELV-300P

NOTE: The above table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Standard recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation. Some dimmers may require more than one product for stable operation. The maximum number of products is determined by the dimmer wattage rating with LEDs. Be careful, these dimmers have different ratings depending on the product type. Again, refer to the dimmer installation instructions.


**DIMENSIONS**

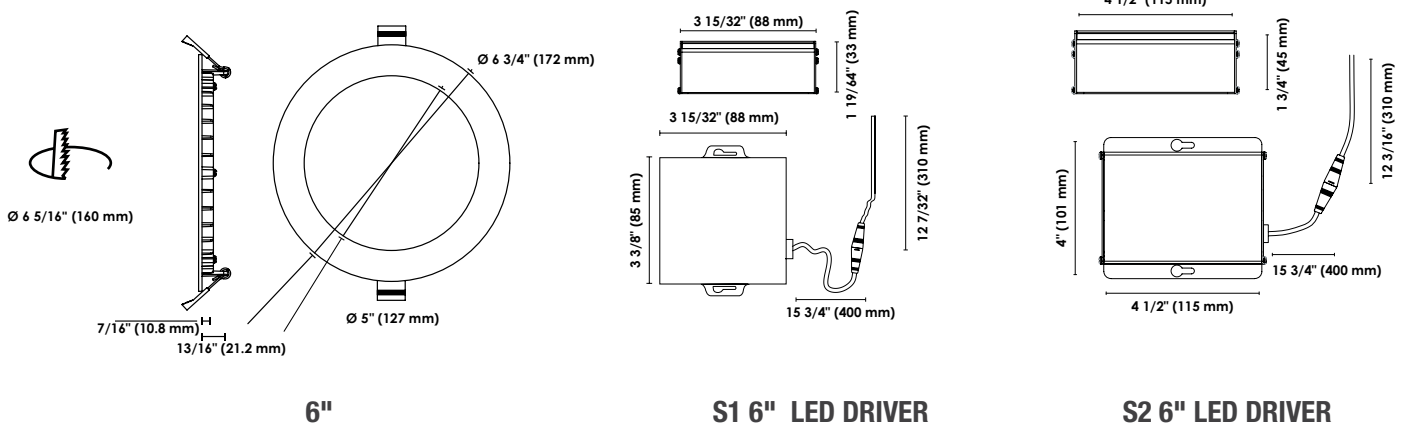

**PHOTOMETRIC DATA<sup>1</sup>**

63864 • LPDL6/RND/12W/30K/WH/STD • 904.6 lm

**Polar candela distribution**

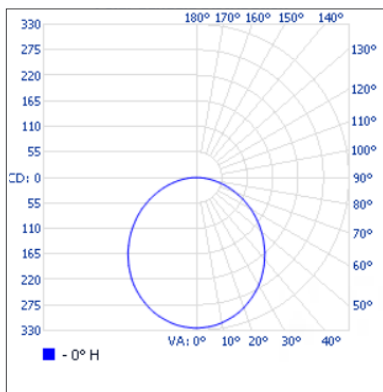

**Zonal lumen summary**

Zone	Lumens	% Fixture
0-30	249.3	27.6%
0-40	405.7	44.8%
0-60	708.7	78.3%
60-90	195.9	21.7%
70-100	86.3	9.5%
0-90	904.6	100%
90-180	0	0%
0-180	904.6	100%

**Illuminance at a distance**

Center beam fc	Beam width
1.7'	4.8'
3.3'	9.2'
5.0'	14.0'
6.7'	18.8'
8.3'	23.3'
10.0'	28.0'


Vert. spread: 109.0°

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

## PHOTOMETRIC DATA<sup>1</sup>

65726 • LPDL6/RND/12W/30K/WH/WET/STD • 846.5 lm

### Polar candela distribution

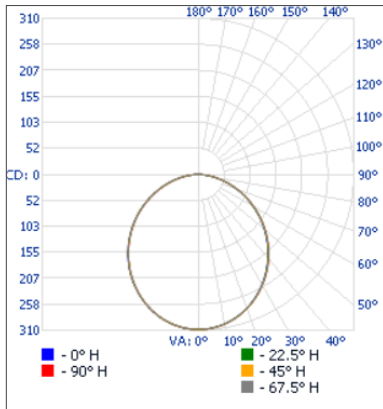

### Zonal lumen summary

Zone	Lumens	% Fixture
0-30	236.2	27.9%
0-40	383.8	45.3%
0-60	669.1	79%
60-90	176.4	20.8%
70-100	75.0	8.9%
90-120	0.4	0.1%
0-90	845.5	99.9%
90-180	1.0	0.1%
0-180	846.5	100%


### Illuminance at a distance

	Center beam fc	Beam width
1.7'	107 fc	4.7' 4.7'
3.3'	28.3 fc	9.1' 9.2'
5.0'	12.3 fc	13.8' 13.9'
6.7'	6.87 fc	18.6' 18.6'
8.3'	4.48 fc	23.0' 23.0'
10.0'	3.08 fc	27.7' 27.8'

■ Vert. spread: 108.3°  
■ Horiz. spread: 108.5°

66962 • LPDL6/S2/FT6/RND/12W/30K/WH/STD • 847.6 lm

### Polar candela distribution

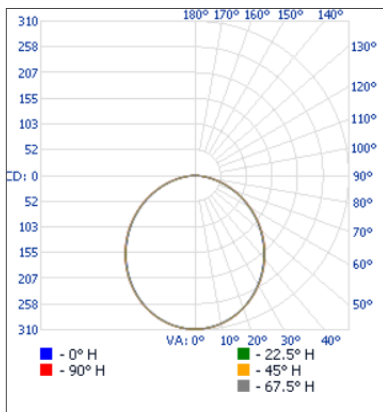

### Zonal lumen summary

Zone	Lumens	% Fixture
0-30	236.6	27.9%
0-40	384.6	45.4%
0-60	670.6	79.1%
60-90	176.3	20.8%
70-100	74.5	8.8%
90-120	0.2	0%
0-90	846.9	99.9%
90-180	0.7	0.1%
0-180	847.6	100%


### Illuminance at a distance

	Center beam fc	Beam width
1.7'	107 fc	4.7' 4.8'
3.3'	28.3 fc	9.1' 9.2'
5.0'	12.3 fc	13.8' 14.0'
6.7'	6.87 fc	18.4' 18.8'
8.3'	4.48 fc	22.8' 23.2'
10.0'	3.08 fc	27.5' 28.0'

■ Vert. spread: 107.9°  
■ Horiz. spread: 108.9°

65946 • LPDL6/S2/RND/12W/30K/WH/STD • 847.6 lm

### Polar candela distribution

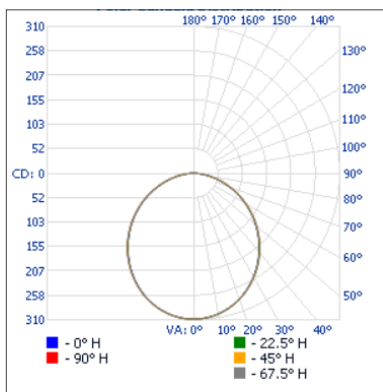

### Zonal lumen summary

Zone	Lumens	% Fixture
0-30	236.6	27.9%
0-40	384.6	45.4%
0-60	670.6	79.1%
60-90	176.3	20.8%
70-100	74.5	8.8%
90-120	0.2	0%
0-90	846.9	99.9%
90-180	0.7	0.1%
0-180	847.6	100%

### Illuminance at a distance

	Center beam fc	Beam width
1.7'	107 fc	4.7' 4.8'
3.3'	28.3 fc	9.1' 9.2'
5.0'	12.3 fc	13.8' 14.0'
6.7'	6.87 fc	18.4' 18.8'
8.3'	4.48 fc	22.8' 23.2'
10.0'	3.08 fc	27.5' 28.0'

■ Vert. spread: 107.9°  
■ Horiz. spread: 108.9°

<sup>1</sup> Complete IES files available on our website.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.